

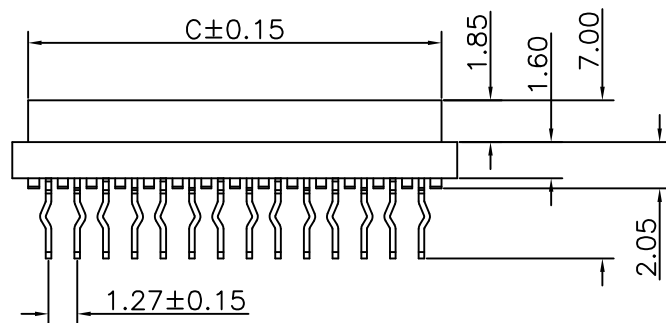
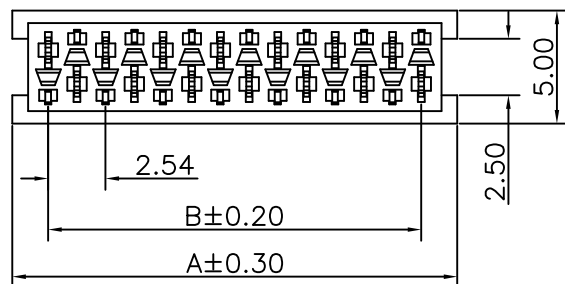


Pos	A	B	C	Pos	A	B	C
4	7.00	3.81	5.60	16	22.24	19.05	20.84
6	9.54	6.35	8.14	18	24.78	21.59	23.38
8	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54

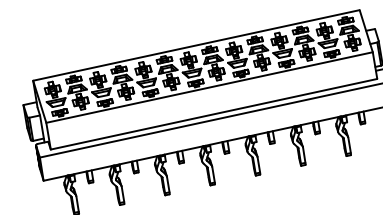

Specifications:
 Current Rating: 1.5A AC/DC
 Voltage Rating: 230V AC/DC
 Contact Resistance: 20m ohm. Max.
 Insulation Resistance: 1000M ohm. Min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Material and Finish
 Insulator: High Temp. Plastic (UL94V-0)
 Contact: Phosphor Bronze
 Finish: Tin Plated
 How to Order
 4409AS-XX

No. Of Positions

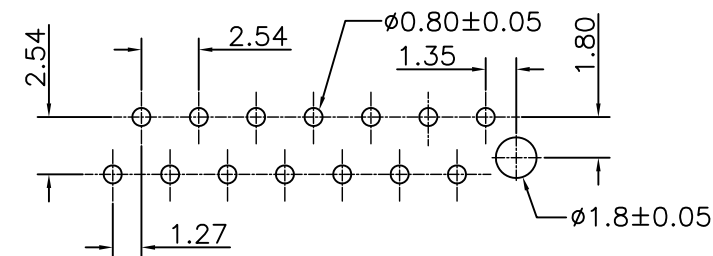

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	DESCRIPTION:	SIZE
E				Jack Huang	.X = ± 0.2 .XX = ± 0.15			
D				CHECKED:	UNIT: MM	2.54mm IDC Socket 180° Type	PART NO:	A4
C				Jerry Chen	SCALE: 1:1			
B				APPROVAL:	SHEET: 1/1	4409AS-XX		
A	09-Jan-2018		Jack Huang	Mike Wu	PROJECTION:			
REV	DATE	FILE	BY					