



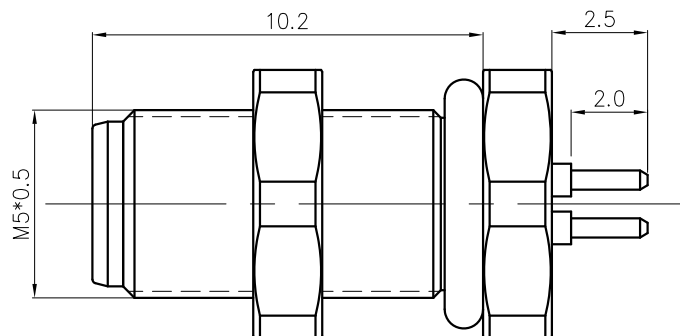


REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

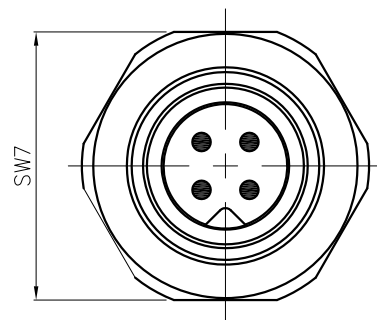

3pin A Coding

Pin Assignment
Front View

4pin A Coding


Pin Assignment
Front View

SP-M5A-XXP-MM-SF7001-00A(H)


Pin number: 03,04

NOTES:


1. Rated voltage/current : 60V / 1A
2. Withstanding voltage : 800V
3. Levels of protection: IP67
4. Wire connection mode: soldering(PCB)
5. Operating temperature: -40°C~+85°C
6. For Panel Thickness Range : 2.0~4.0mm
7. RoHS Compliance
8. Tolerance :
 - .X ±0.25mm
 - .XX ±0.1mm
 - Angles ±1°



Panel cut

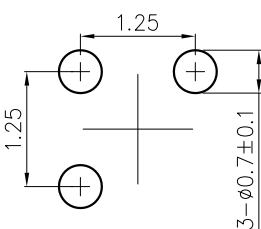

PCB layout



PCB layout

DETACHED LISTS	PART NO.: SPM5AXXPMMSF700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M5A-XXP-MM-SF7001-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.11	REV D0-1		
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1