
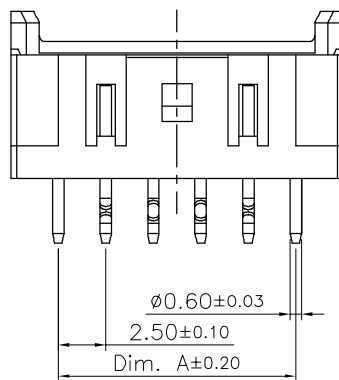
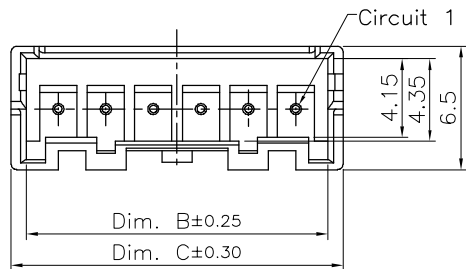


Specifications:
Current Rating: 3.0A AC,DC
Voltage Rating: 250V AC,DC
Contact Resistance: 10m ohm.Max
Insulation Resistance: 1000M ohm.Min
Withstanding Voltage: 1000V AC/Minute
Operating Temperature Range: -40°C ~ +105°C

Material:
Insulator: Nylon 66(UL94V-0)
Insulator Color: Natural
Contact: Brass
Plated: Gold or Tin Plated

How To Order
2317SZ-XXX
Blank Tin Plated
G:Gold Plated
No. of Contacts
Straight Type

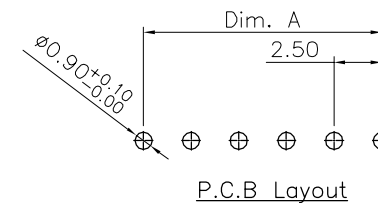

Dimension Information:

Poles	Dim. A	Dim. B	Dim. C
2	2.50	5.85	7.50
3	5.00	8.35	10.00
4	7.50	10.85	12.50
5	10.00	13.35	15.00
6	12.50	15.85	17.50
7	15.00	18.35	20.00
8	17.50	20.85	22.50


Poles	Dim. A	Dim. B	Dim. C
9	20.00	23.35	25.00
10	22.50	25.85	27.50
11	25.00	28.35	30.00
12	27.50	30.85	32.50
13	30.00	33.35	35.00
14	32.50	35.85	37.50
15	35.00	38.35	40.00

Kink Type:


Pin.No	1	2	3	4	5	6	Pin-2	Pin-1	Pin
6 Over	-	A	B	-	-	-	B	A	-
6	-	A	B	B	A	-			
5	A	B	-	B	A				
4	A	B	B	A					
3	A	B	A						
2	A	B							

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	Neltron Industrial Co., Ltd.	
E				JERRY	.X=±0.25 .XX=±0.20		
D	19-APR-2021	Amend Appearance	JERRY	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	29-SEP-2020	ADD P2	ROMINA		SCALE: 1:1	2.5mm Wire To Board Wafer Straight Type	A4
B	18-SEP-2020	AMEND_P/N	JERRY	APPROVAL:	SHEET: 1/2	PART NO: 2317SZ-XXX	
A	05-DEC-2019		JERRY		PROJECTION:		
REV	DATE	FILE	BY	RORY			

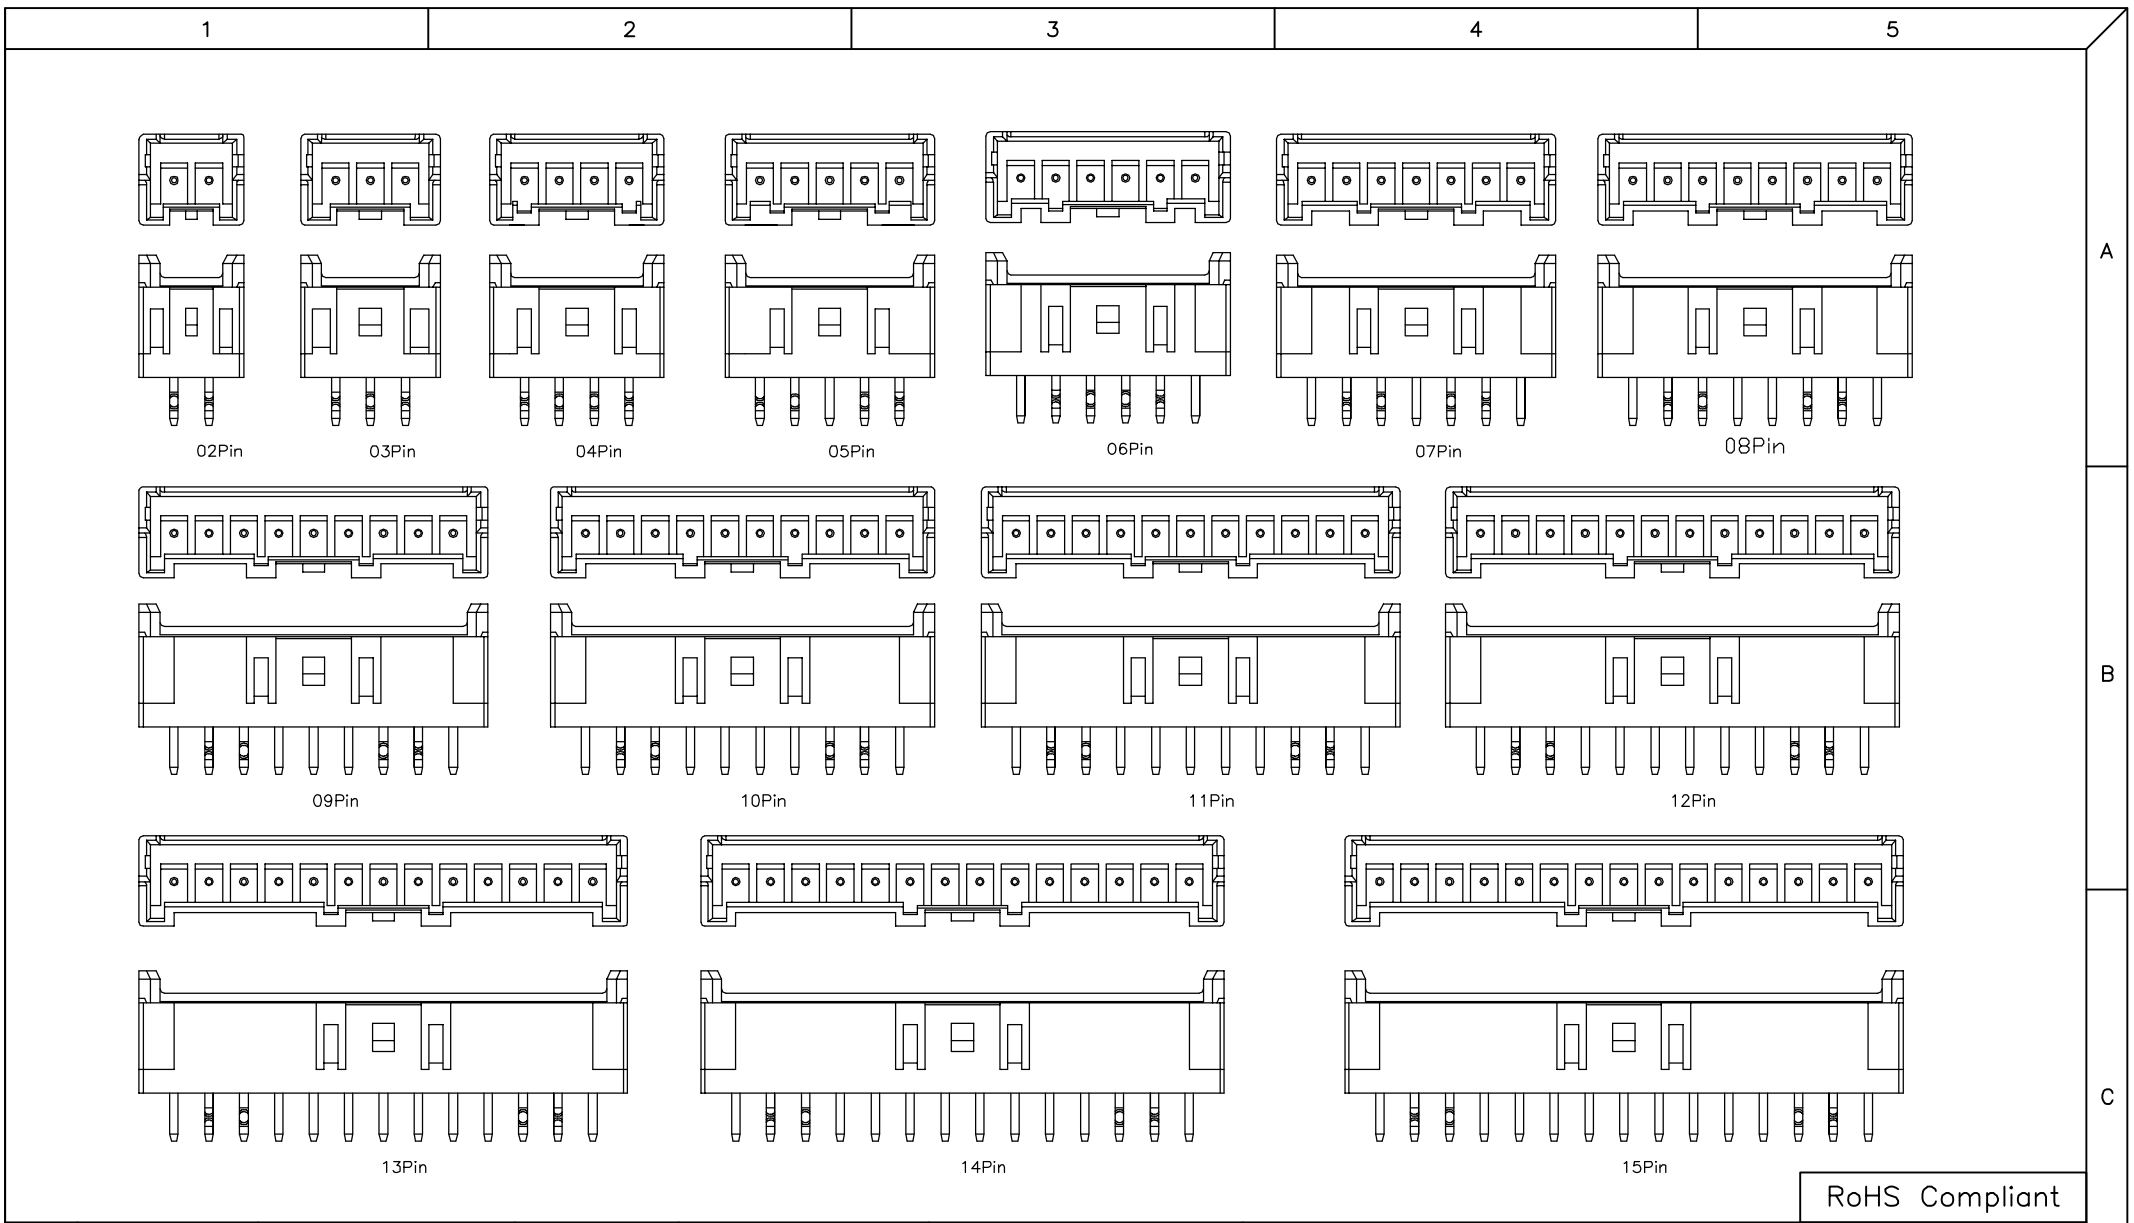

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				JERRY	.X=±0.25 .XX=±0.20		
D	19-APR-2021	Amend Appearance	JERRY	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	29-SEP-2020	ADD P2	ROMINA		SCALE: 1:1	2.5mm Wire To Board Wafer Straight Type	A4
B	18-SEP-2020	AMEND_P/N	JERRY	APPROVAL:	SHEET: 2/2	PART NO:	
A	05-DEC-2019	(PC0619)	JERRY		PROJECTION: 	2317SZ-XXX 	
REV	DATE	FILE	BY	RORY			