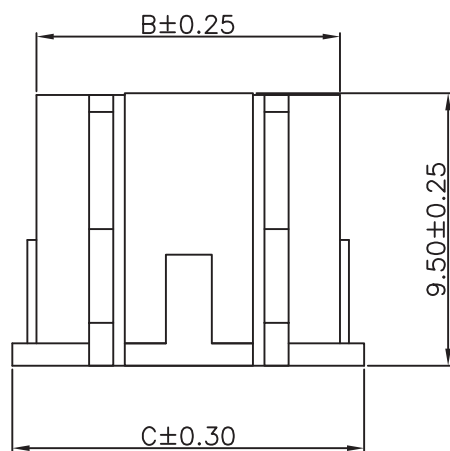
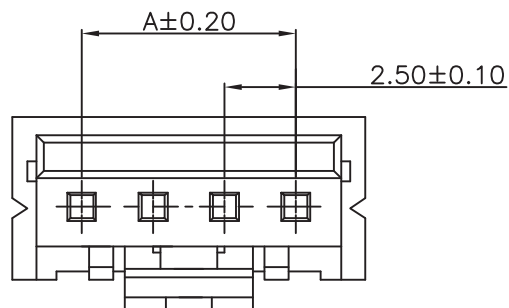


Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm Max

Insulation Resistance:1000M ohm Min

Withstanding Voltage:1000V AC/Minute

Operating Temperature Range:-25°C To +85°C

Materials and Finish:

Insulator:High Temp.Plastic(Nylon 66 UL94V-0)

Standard Color:White

How To Order

2318HZ-XX

No. Of Positions
Housing

PART NO.	DIMENSION(MM)		
	A	B	C
02	2.50	5.64	7.30
03	5.00	8.14	9.80
04	7.50	10.64	12.30
05	10.00	13.14	14.80
06	12.50	15.64	17.30
07	15.00	18.14	19.80
08	17.50	20.64	22.30
09	20.00	23.14	24.80
10	22.50	25.64	27.30
11	25.00	28.14	29.80
12	27.50	30.64	32.30
13	30.00	33.14	34.80
14	32.50	35.64	37.30
15	35.00	38.14	39.80

RoHS Compliant

F				DRAWN: Julian	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
E								
D				CHECKED: Bill He	UNIT: MM	DESCRIPTION: 2.50MM HOUSING CONNECTOR SERIES	SIZE A4	
C					SCALE: 1:1			
B				APPROVAL: Norman	SHEET: 1/1	PART NO: 2318HZ-XX		
A	08-Jun-2018		Julian		PROJECTION: 			
REV	DATE	FILE	BY					