

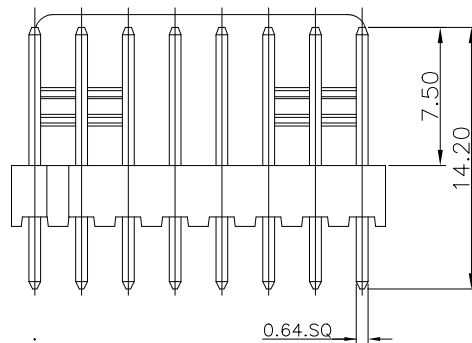
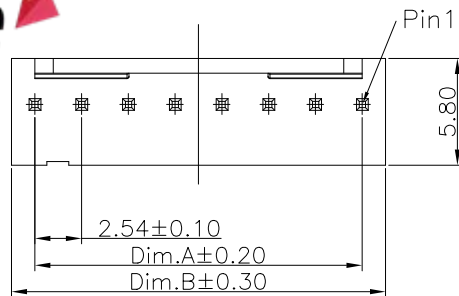


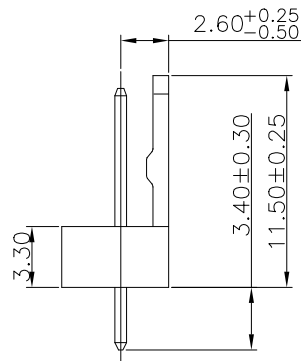

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			



Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m Ohm Max

Insulation Resistance:1000M Ohm Min.

Withstanding Voltage:1000V AC/Minute

Operating Temperature Range:-40°C To +105°C

Material and Finish:

Insulator:Nylon 66 (UL94V-0)

Insulator Color:Beige White

Contact:Brass

Plating:Gold/Tin Plated/Matte Tin Plated

How To Order

2217S-XXX-WH2

WH2:Beige White


Blank Tin Plated

MT:Matte Tin Plated

G:Gold Plated

No. Of Contacts

Straight Type

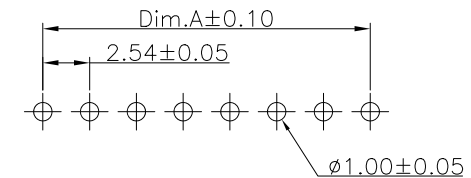

P.C.B layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Lisy Liu	.X=±0.2 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE:1:1	2.54mm Wire to Board Wafer Straight Type	A4
B	03-Jan-2024	Add Plating Option	Chiko Huang	APPROVAL:	SHEET: 1 / 1	PART NO:	
A	03-Nov-2019		Jerry Chen	Mike Wu	PROJECTION:	2217S-XXX-WH2	
REV	DATE	FILE	BY				