

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留对涉及发明、实用新型、外观设计、集成电路布图设计等权利的所有权利。

FOR-1755 Rev.1.7

2


3

4



5

6


PCB LAYOUT

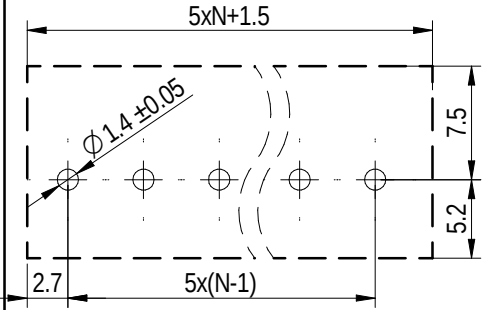



X

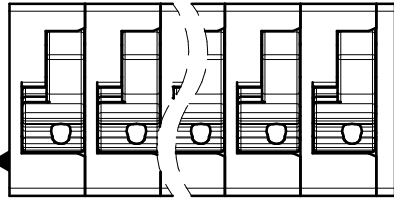

Y

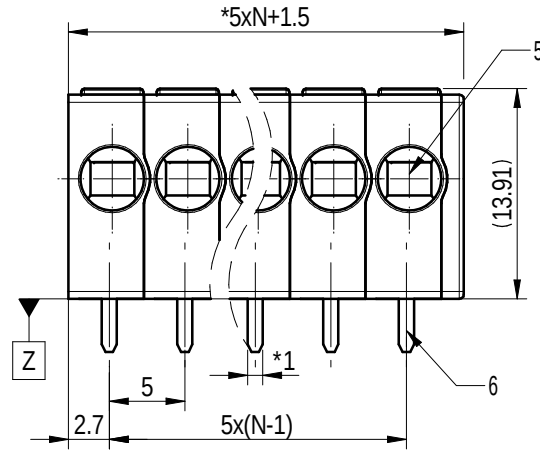

Z

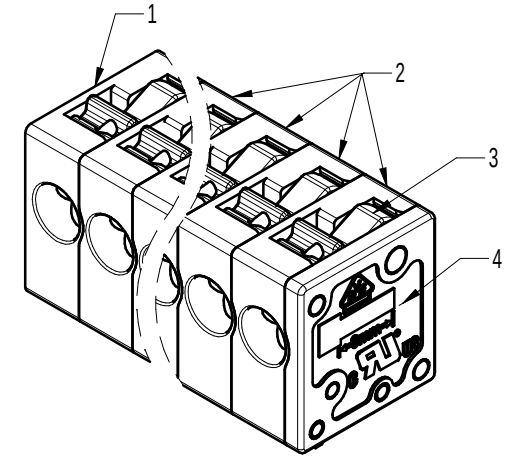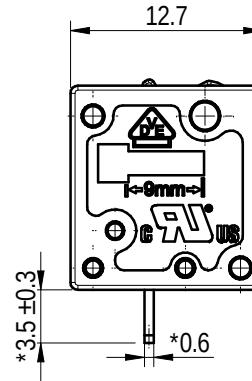

未标注尺寸请参考3D文件

未注公差/General tolerances(mm)														0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	
UL 标准/UL Standard:											B	C	D	
额定电压/电流/Rated Voltage(V)/Current(A)											300/15	/	300/10	
IEC 标准/IEC Standard:														
过压类别/Overvoltage Category/污染等级/Pollution Degree											III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)											320/20	400/20	630/20	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)											4	4	4	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)											20~14/ 0.5~2.5			
间距/Pitch(mm)/线数范围/Poles											5.0/N=02~12P			
剥线长度/Stripping length(mm)											9~10			
使用温度范围/Operating temperature(°C)											-40~+105			
符合RoHS环保要求/Conform to RoHS											Yes			

6	Pin_header	Copper	Sn_plated
5	Spring	Stainless Steel	/
4	Cover	PA66	UL94V-0
3	Button	PPS	UL94V-0
2	Housing	PA66	UL94V-0
1	Housing-Leftside	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL:		SURFACE/COLOR:	
APPD: David		2024.07.30		MAT NO./REV: /	
CHKD: David		2024.07.30		MAT STATUS: 批量	
DRFT: 曹心一		2024.07.30		NAME	
A4		200123562		CUSTOMER DRAWING	
200123562		TYPE		DRAWING STATUS	
200123562		CUSTOMER DRAWING		已发布	
200123562		SCALE		2:1	
200123562		SHEET		1/1	

00			曹心一	2024.07.30
REV	ECN	DESCRIPTION	DRFT	DATE

