


Specifications
 Current Rating:3.0A AC/DC
 Voltage Rating:500V AC/DC $\triangle B$
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute $\triangle B$
 Operating Temperature Range:-25°C To +105°C $\triangle B$

Material and Plated
 Insulator:PBT (UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 $\triangle C$ Plated:Gold Plated/Tin Plated/SG:Selective Gold Plated
 SG15:Selective Gold Plated 15U"
 SG30:Selective Gold Plated 30U"

How To Order
 2211S-XXX

G:Gold Plated
 T:Tin Plated $\triangle C$
 $\triangle D$ MT:Matte Tin Plated
 SG>Contact Area Gold Plated,
 Solder Tail Matte Tin Plated.
 SG15>Contact Area 15u" Gold Plated,
 Solder Tail Matte Tin Plated.
 SG30>Contact Area 30u" Gold Plated,
 Solder Tail Matte Tin Plated.
 No. Of Contacts
 Straight Type

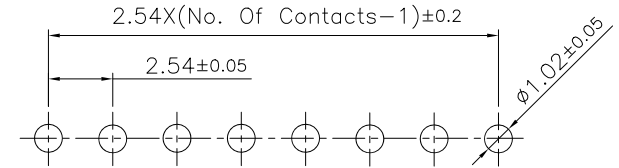

P.C.B Layout

RoHS Compliant

F				DRAWN: Romina Wu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
E					
D	18-DEC-2023	Add Matte Tin Plated	Lisy Liu	CHECKED: Jerry Chen	UNIT: MM
C	28-JUN-2019	Add Tin Plated	Jerry Chen		SCALE: 1:1
B	14-JAN-2019	Update drawing	Romina Wu	APPROVAL: Mike Wu	SHEET: 1/1
A	25-OCT-2018		Romina Wu		PROJECTION:
REV	DATE	FILE	BY		

Neltron Industrial Co., Ltd.

DESCRIPTION: 2.54mm Pin Header Single Row Straight Type

PART NO: 2211S-XXX

SIZE: **A4**