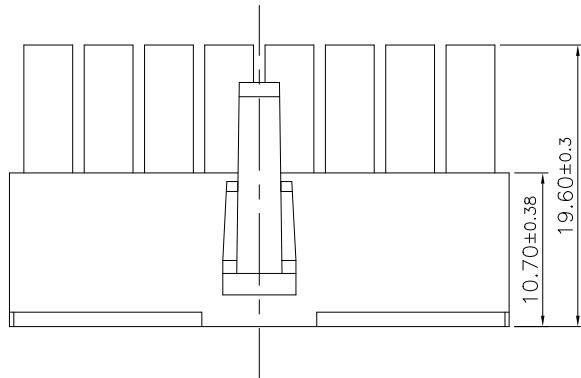
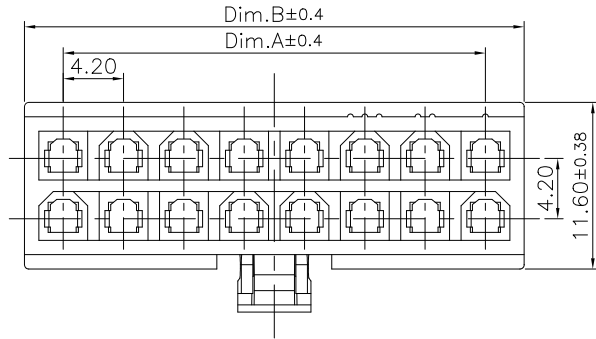


Specifications:
Current Rating:9.0A AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m Ohm. Max.
Insulation Resistance:1,000M Ohm. Min.
Withstanding Voltage:1500V AC/Minute
Operating Temperature Range:-40°C ~ +105°C
Application Wire:Awg 16~28

Material And Finish:
Insulator:Nylon 66 (UL94V-2) or (UL94V-0)
Color: Transparent or White or Black
Part Is For Use With Neltron Female Terminal 2257T


How To Order
2257-XX-XX-XX-RC


Blank UL94V-2(Transparent)
V0:UL94V-0(White)
Blank Natural
BK:Black
No. of Contacts

Dimension:

Circuits	DIM.A	DIM.B	DIM.C
2		5.40	3.05
4	4.20	9.60	
6	8.40	13.80	
8	12.60	18.00	
10	16.80	22.20	
12	21.00	26.40	
14	25.20	30.60	
16	29.40	34.80	
18	33.60	39.00	
20	37.80	43.20	
22	42.00	47.40	
24	46.20	51.60	

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Lisy Liu	.X=±0.40 .XX=±0.30		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				Jerry Chen	SCALE: 1:1	4.2mm Receptacle Housing	A4
B				APPROVAL:	SHEET: 1/3	PART NO:	
A	18-JUN-2024		Lisy	Rory Chen	PROJECTION: 	2257-XX-XX-XX-RC	
REV	DATE	FILE	BY				

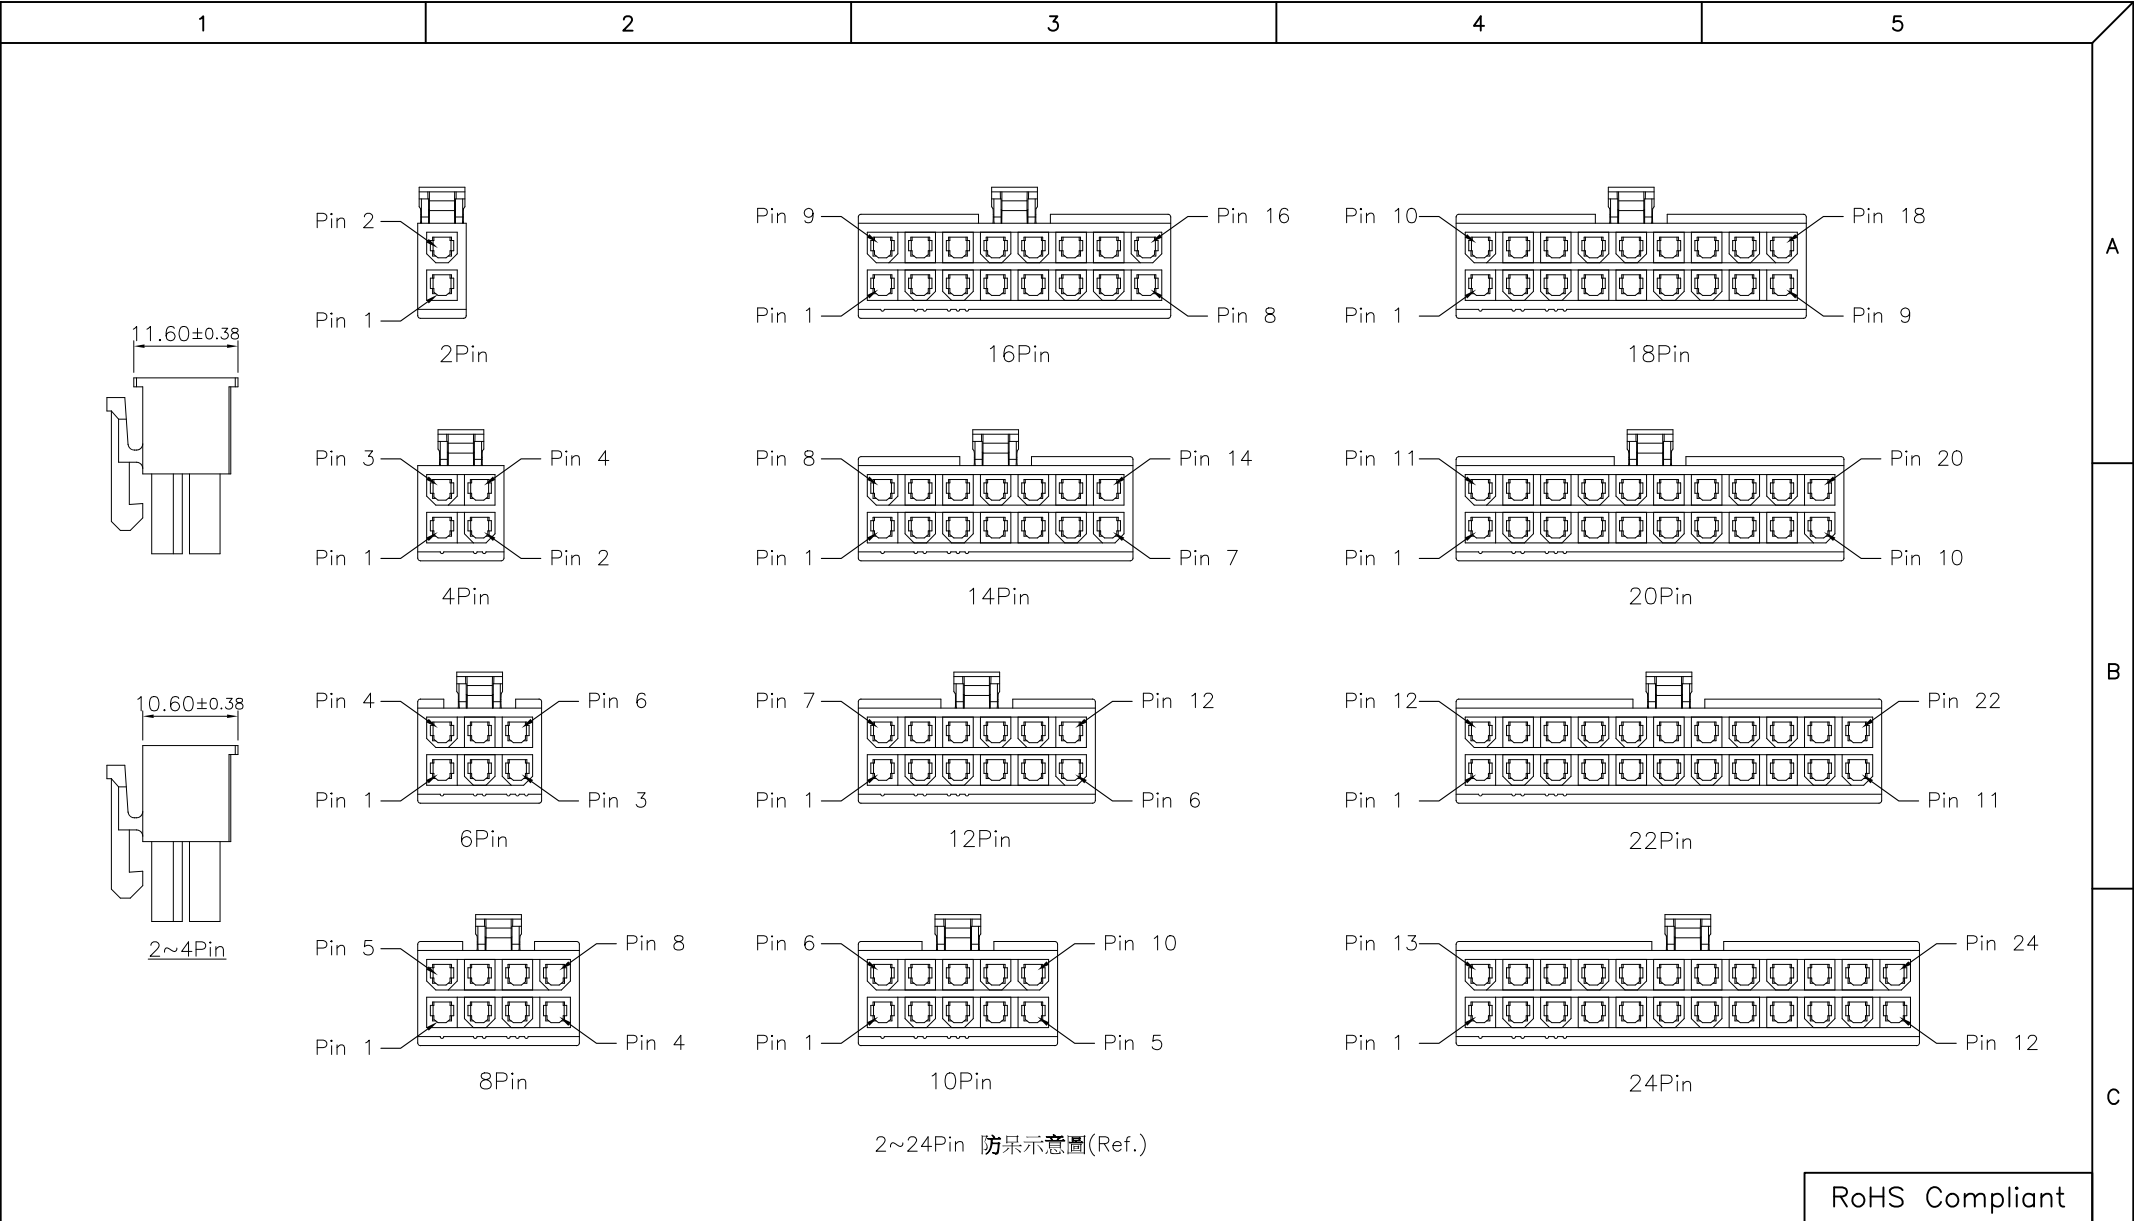


1

2

3

4


5

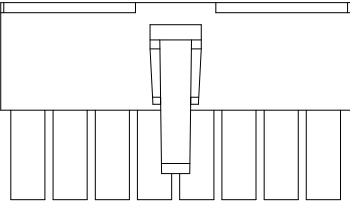

Pin	Pcs/Bag	Pin	Pcs/Bag
2	1000	14	100
4	200	16	100
6	200	18	100
8	200	20	100
10	100	22	100
12	100	24	100


Note:
1.Quantity
XXX Pcs/Bag






XXPcs/Bag





Carton

RoHS Compliant

F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 4.2mm Receptacle Housing Packing List	SIZE A4
C					SCALE:		
B				APPROVAL: Rory Chen	SHEET: 3/3	PART NO: 2257-XX-XX-XX-RC	
A	18-JUN-2024		Lisy		PROJECTION: 		
REV	DATE	FILE	BY				