


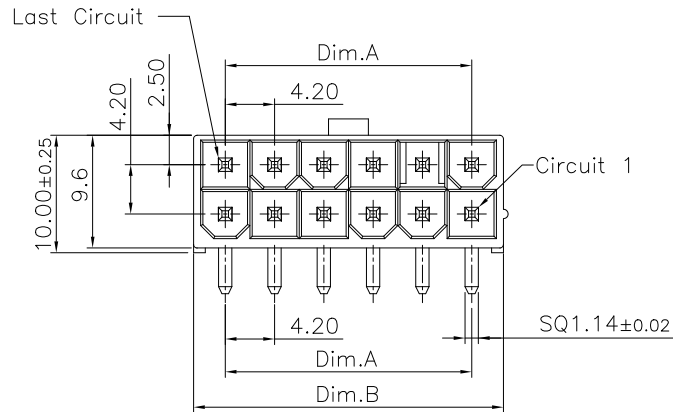




Specifications:

Current Rating:9.0A AC/DC
Voltage Rating:600V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:1500V AC For One Minute
Operating Temperature Range:-40°C To +105°C



Materials:

Insulator:Nylon 66 (UL94V-2) or (UL94V-0)
Insulator Color:Transparent or White or Ivory or Black
Contact:Copper Alloy
Plating:Tin Plated


How To Order

2269R-XX-01-XX-XX-TR

TR:Tape&Reel
Blank UL94V-2(Transparent)
V0:UL94V-0(White)
V0F4A:UL94V-0(SC21)(Ivory)
Blank Natural
BK:Black
Without Flange
No. Of Contact
R:Right Angle Type


Dimension Information:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	—	5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

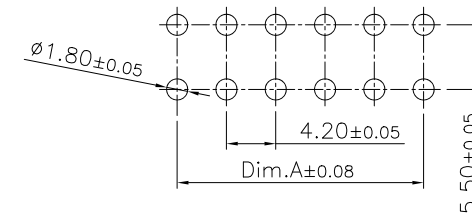

P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Lisy Liu	.X=±0.40 .XX=±0.30		
D				CHECKED:	UNIT: MM	DESCRIPTION: 4.2mm Power Wafer Double Rows R/A Without Flange Type	
C	28-OCT-2025	Modify Tape Appearance	Lisy	Jerry Chen	SCALE: 1:1		
B	14-AUG-2023		Janice	APPROVAL:	SHEET: 1/3	PART NO: 2269R-XX-01-XX-XX-TR	
A	11-JAN-2023		Lisy	Rory Chen	PROJECTION: 		
REV	DATE	FILE	BY				SIZE A4



F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.		DESCRIPTION: 4.2mm Power Wafer Double Rows R/A Without Flange Type	SIZE A4		
E											
D											
C	28—OCT—2025	Modify Tape Appearance	Lisy	CHECKED: Jerry Chen	UNIT: MM	PART NO: 2269R—XX—01—XX—XX—TR					
B	14—AUG—2023		Janice		SCALE: 1:1						
A	11—JAN—2023		Lisy		SHEET: 2/3						
REV	DATE	FILE	BY	APPROVAL: Rory Chen	PROJECTION: 						