

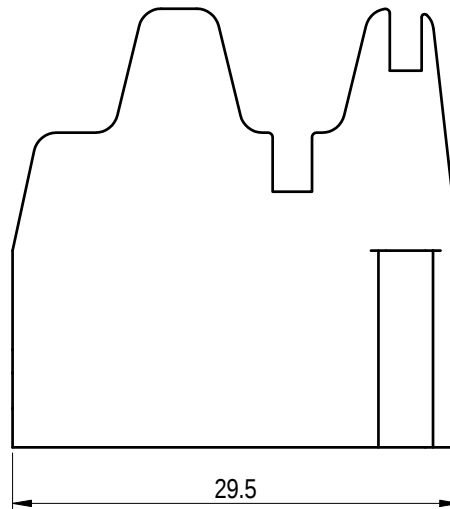


未注公差/General tolerances(mm)	
-----------------------------	--

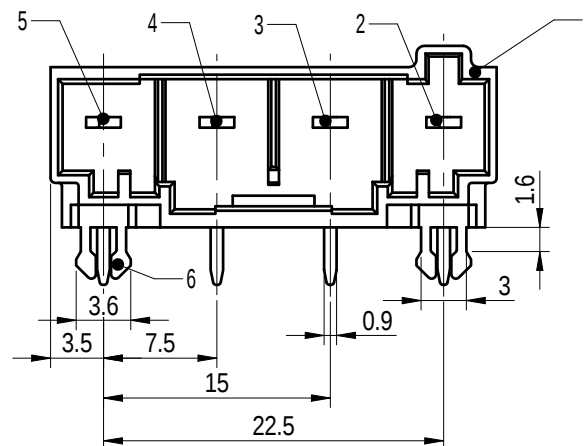

未注公差/General tolerances(mm)													 0.1/10  $\pm 2^\circ$	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
± 0.12	± 0.18	± 0.22	± 0.26	± 0.31	± 0.37	± 0.57	± 0.80	± 0.93	± 1.05	± 1.15	± 1.60	± 2.20		± 2.50

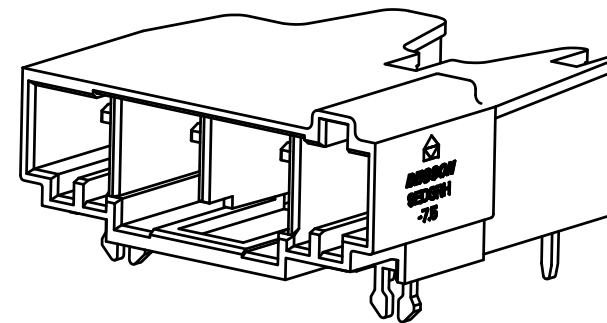

The A&Z(H) in the name means: A(H) and Z(H).

6	Fixed Foot	Copper alloy	Sn_Plated
5	Pin header1	Copper	Au/Sn Plated Part
4	Pin header3	Copper	Au/Sn Plated Part
3	Pin header2	Copper	Au/Sn Plated Part
2	Pin header1	Copper	Au/Sn Plated Part
1	Housing	PA66+GF%	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/16	600/16	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	800/20	1000/20	1000/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	8
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



APPD:	兰春华	2022. 12. 13
CHKD:	龚耀志	2022. 12. 13
DRFT:	方哲盛	2022. 12. 13

MATERIAL:	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量

NAME	9EDGRH-7.5-XXP-1Y-100A&Z(H)
------	-----------------------------

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200019666	CUSTOMER DRAWING	已发布	2:1	1/1

00			方哲盛	2022.12.13
REV	ECN	DESCRIPTION	DRFT	DATE