


active

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

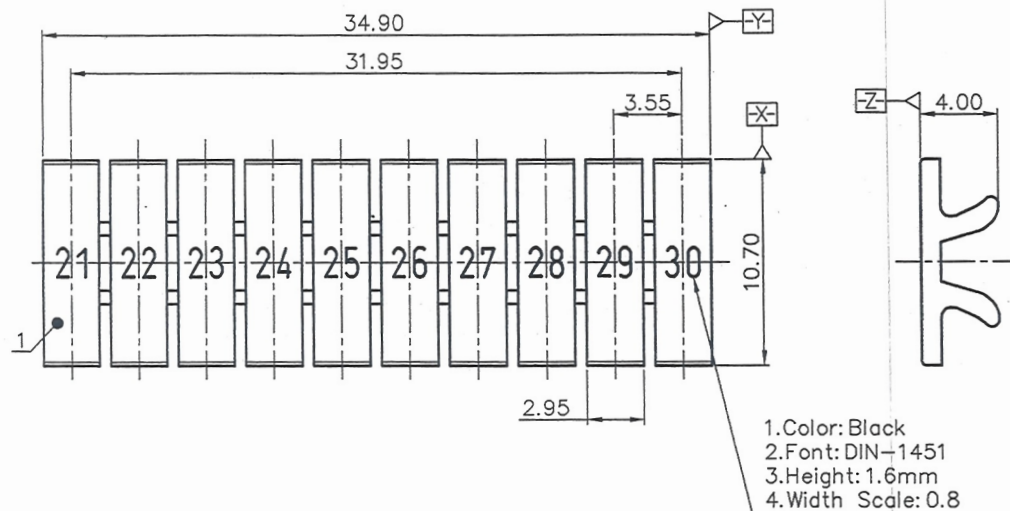

NOTES:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.55mm, Poles : 10P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	10	10	24	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

5.RoHS Compliance

ZB3.5 - 10P - 1Y - 03A (H)

(Series No.)(Poles)(Single Pitch)(Color):1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

03A-(Customer Request)
(RoHS)



1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
	NAME: ZB3.5-10P-1Y-03A(H)		
	TITLE: CUSTOMER DRAWING	REV	TO
	DRAWING NO.: ZB3.5-C04	SHEET	1/1
	MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1

PART NO.: /	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD: 2018.10.29	
CHKD: Robin 2018.10.23	
DRFT: HH 2018.02.27	
THIRD ANGLE PROJECTION	