


active

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

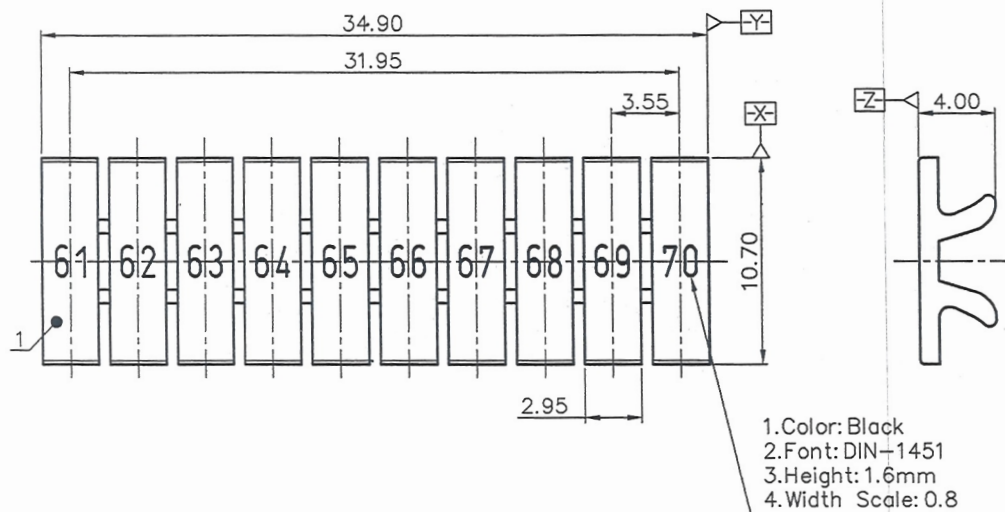

NOTES:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.55mm, Poles : 10P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm					
Over 6 TO 6	Over 10 TO 24	Over 30 TO 30	Over 60 TO 60	Over 100 TO 100	Over 150 TO 150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2'

5.RoHS Compliance

ZB3.5 - 10P - 1Y - 07A (H)

(Series No.)(Poles)(Single Pitch)(Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

07A-(Customer Request)
 (RoHS)



1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: <i>Amor 2018.10.24</i>	NAME: ZB3.5-10P-1Y-07A(H)		
	CHKD: <i>Robin 2018.10.23</i>	TITLE: CUSTOMER DRAWING		
	DRFT: HH 2018.03.01	REV TO		
THIRD ANGLE PROJECTION		DRAWING NO.: ZB3.5-C08	SHEET 1/1	
		DO NOT SCALE DRAWING	SCALE 1:1	