


active

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

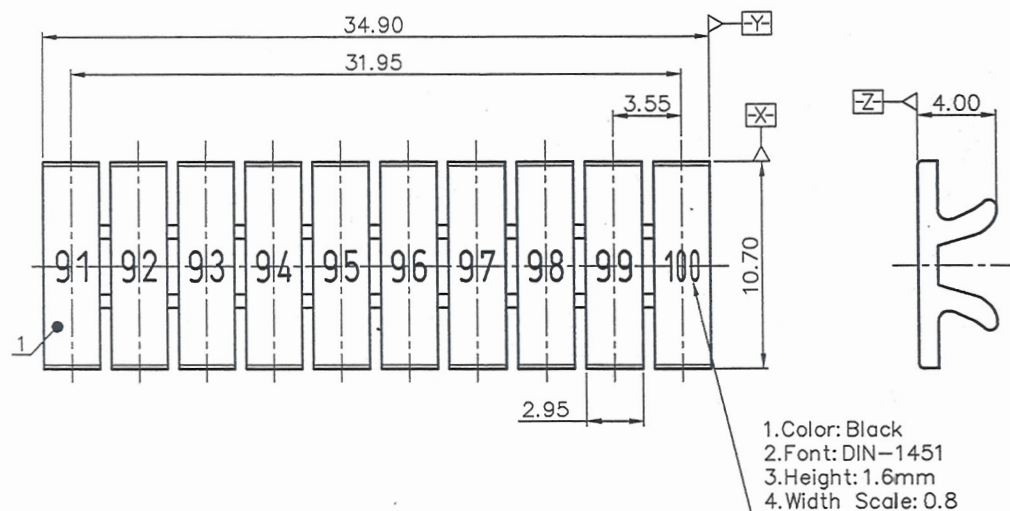

NOTES:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.55mm, Poles : 10P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	10	10	24	30	60	100	150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5. RoHS Compliance

ZB3.5 - 10P - 1Y - 10A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)


(RoHS)

10A-(Customer Request)



ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

1	Housing	PA66	UL94V-0
---	---------	------	---------

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: <i>Arum 2018.10.24</i>		NAME: ZB3.5-10P-1Y-10A(H)	
	CHKD: <i>Robin 2018.10.23</i>			
	DRFT: HH 2018.03.01		TITLE: CUSTOMER DRAWING	
			REV	TO
	 THIRD ANGLE PROJECTION		DRAWING NO.: ZB3.5-C11	SHEET 1/1
		 MM (INCH)	DO NOT SCALE DRAWING SCALE 1:1	