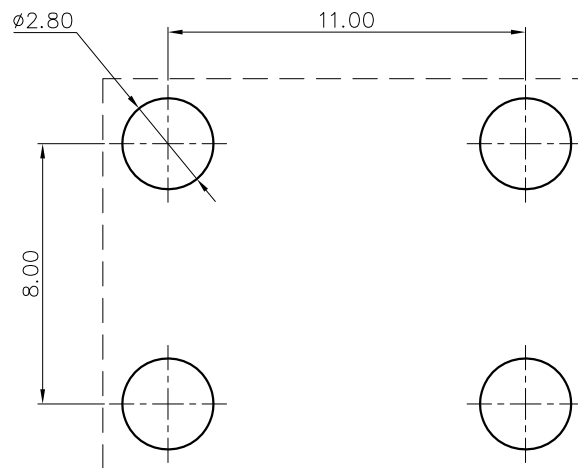


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PCB LAYOUT

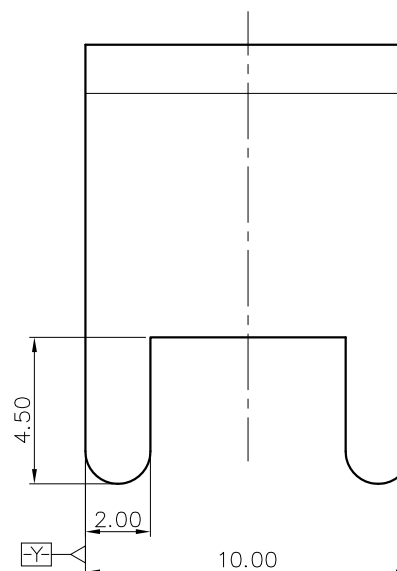
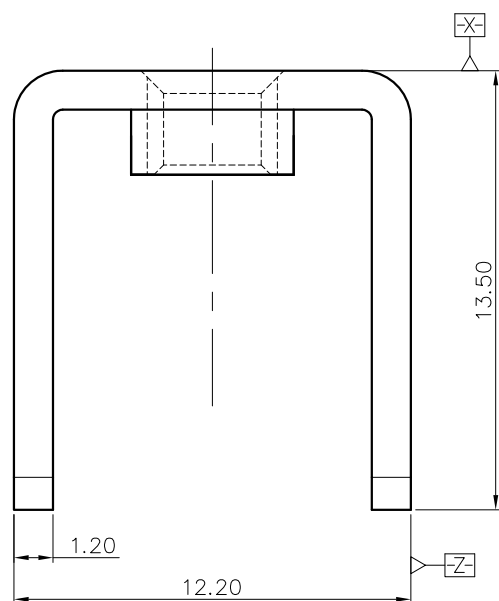
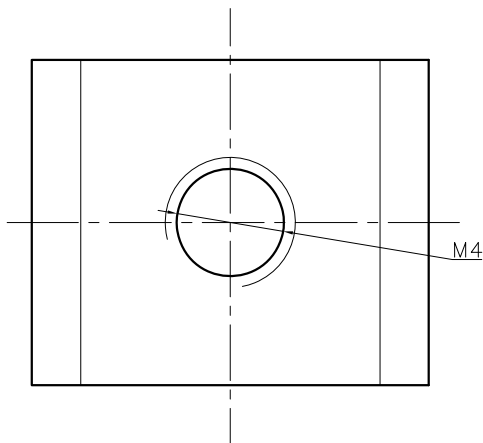
NOTES:

- 1.Rated current : 50A
- 2.Torque value : M4 , 10.53Lb.in
- 3.Dimension shall be interpreted per ASME Y14.5-2009
- 4.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				0.1/10	0.1/10
TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150	
± 0.15	± 0.20	± 0.30	± 0.30	± 0.50	± 0.70	± 1.00	± 1.30	$\pm 2'$

5.RoHS Compliance

K45 -00A (H)
(Series No.) (RoHS)
-00A-(Standard)

**active**

DETACHED LISTS	PART NO.:	/		
	APPD:	NAME:		
	CHKD:	K45-00A(H)		
	DRFT:	ZX 11/16/16"	TITLE: CUSTOMER DRAWING	REV TO
	THIRD ANGLE PROJECTION		DRAWING NO.: K45-C01	SHEET 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

1	Pin header	Copper alloy	Sn Plated
---	------------	--------------	-----------

NINGBO DEGSON ELECTRICAL CO., LTD			
-----------------------------------	--	--	--

K45-00A(H)			
------------	--	--	--

K45-00A(H)			
------------	--	--	--

K45-00A(H)			
------------	--	--	--