
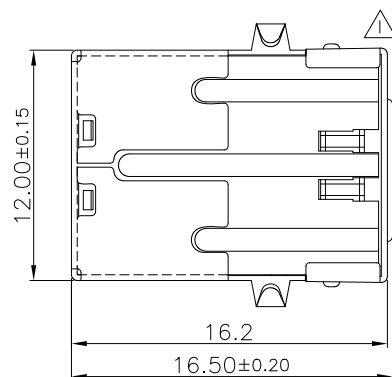
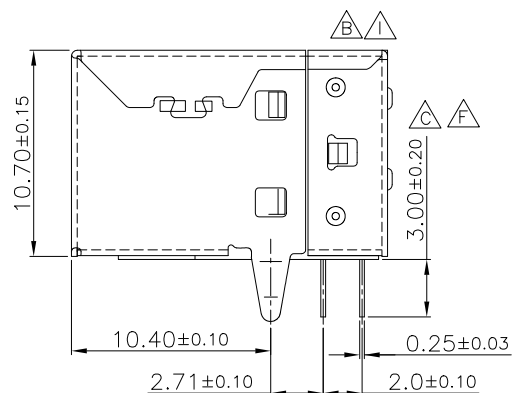


active

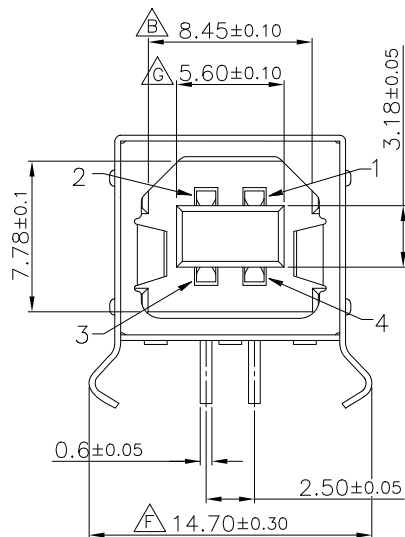

Specifications:

Current Rating:1.5A AC/DC $\triangle B$


Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-50°C ~ +85°C $\triangle B$



Material and Finish

Insulator:PBT or Nylon 9T or LCP (UL94V-0) $\triangle F$ $\triangle G$

Contact:Phosphor Bronze

Plating:Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

Back Cover:SPCC, Matte Nickel Plated

How To Order

5075BR-04-XX-XX-XX

Blank PBT

F5:Nylon 9T $\triangle F$

F7:LCP $\triangle G$

Standard Selective Plated

03:Selective Gold Plated 3u" $\triangle H$


15:Selective Gold Plated 15u"

30:Selective Gold Plated 30u"

BK:Black


WH:White


OR:Orange(LCP) $\triangle A$

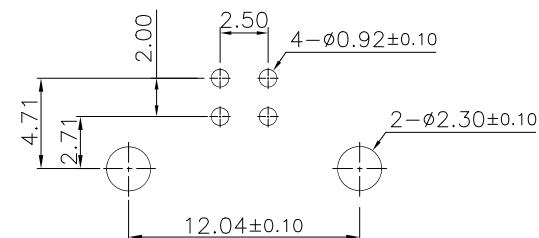


P.C.B Layout

RoHS Compliant

K				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
J	10-Mar-2025	Add Color Option	Jamie Chuang	Zhou	.X=±0.20 .XX=±0.15		
I	26-Nov-2024	$\triangle A$	Yizhen Lee	CHECKED:		DESCRIPTION: USB B Type PCB Socket Right Angle Type	
H	04-Jul-2024	Add Plated Option	Yizhen Lee	Jeremy Liu	UNIT: MM SCALE: 1:1		
G	30-Dec-2020	Add LCP	Jamie Wang	APPROVAL:	SHEET: 1/2	PART NO: 5075BR-04-XX-XX-XX $\triangle F$	
A	13-Jul-2011		Zhou	Mike Wu	PROJECTION: 		
REV	DATE	FILE	BY			SIZE A4	

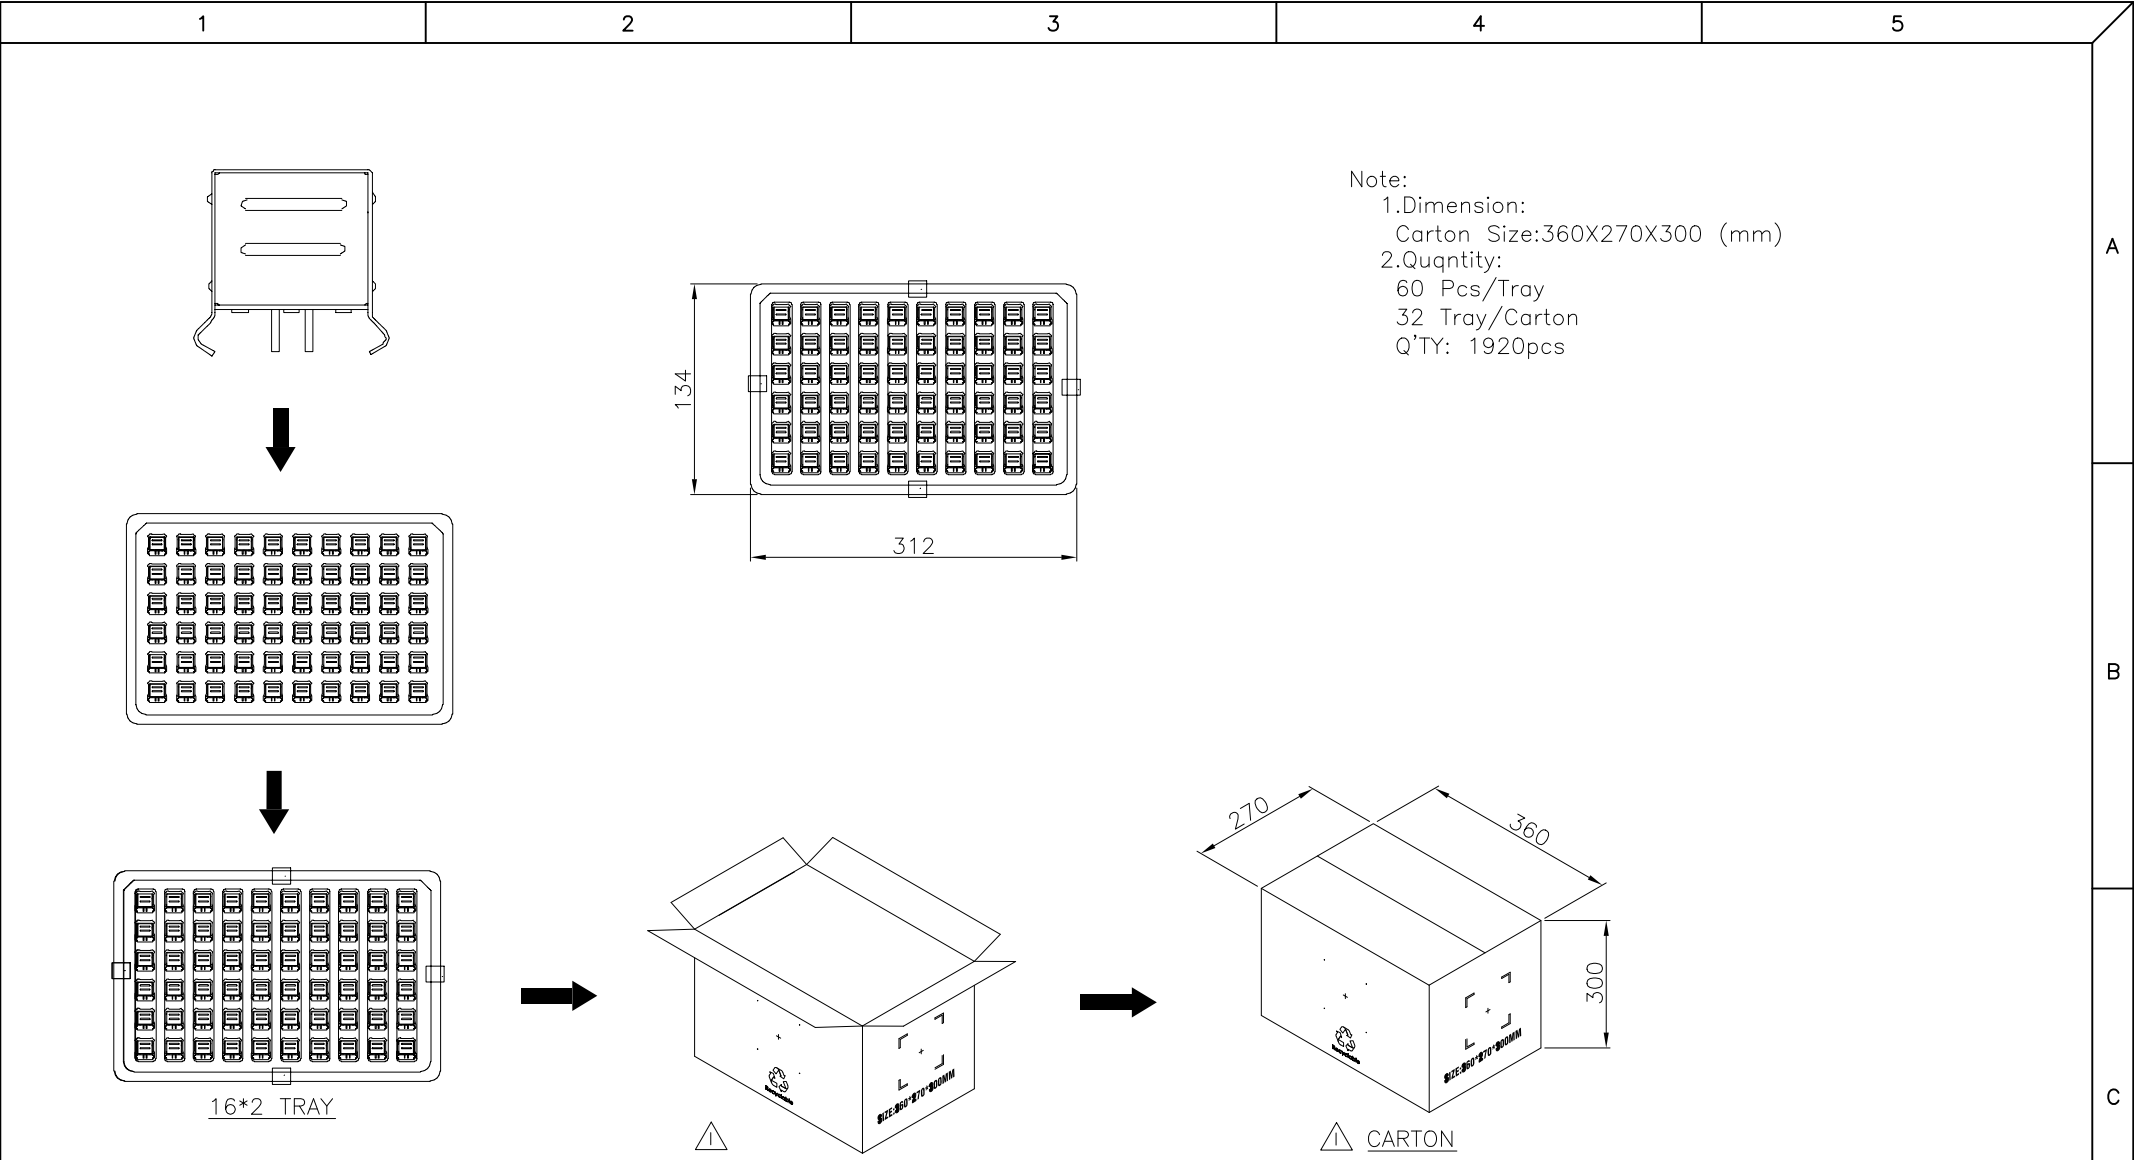

Note:
1.Dimension:
Carton Size:360X270X300 (mm)
2.Qunntity:
60 Pcs/Tray
32 Tray/Carton
Q'TY: 1920pcs

				RoHS Compliant			
K				DRAWN: Zhou	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.	
J	10-Mar-2025	Add Color Option	Jamie Chuang				
I	26-Nov-2024		Yizhen Lee	CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: USB B Type PCB Socket Right Angle Type	SIZE A4
H	04-Jul-2024	Add Plated Option	Yizhen Lee		SCALE: 1:1		
G	30-Dec-2020	Add LCP	Jamie Wang	APPROVAL: Mike Wu	SHEET: 2/2	PART NO: 5075BR-04-XX-XX-XX 	
A	13-Jul-2011		Zhou		PROJECTION: 		
REV	DATE	FILE	BY				