

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violation will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型或外观设计注册外，未经许可擅自复制或传播本文件内容，侵犯者将承担法律责任。本公司保留对涉及发明、实用新型或外观设计的所有权利。

FOR-1755 Rev.2.0






2

3

4

5

6

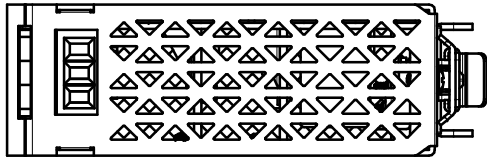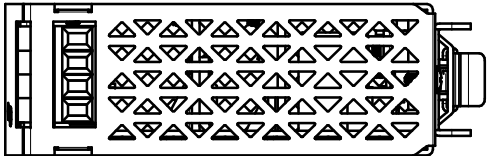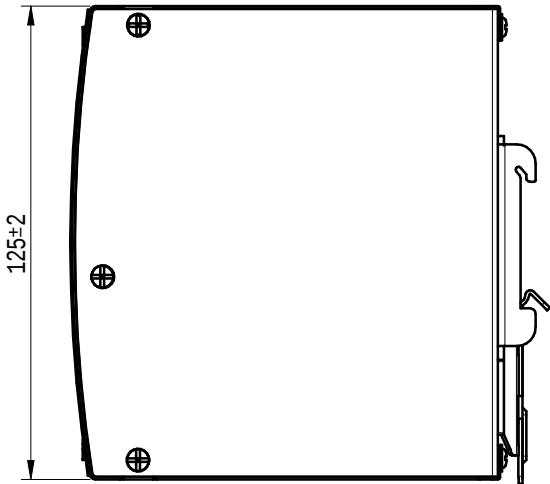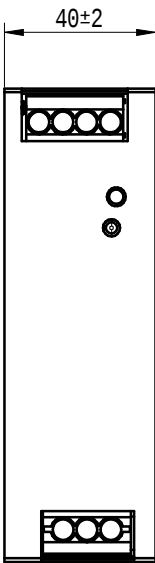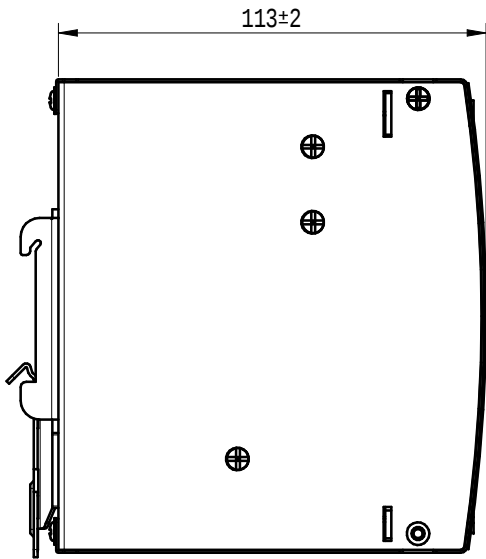


未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500 ~ 1000	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

输入电压范围 Input voltage range	90~264VAC 127~370VDC
额定输出电压 Rated output voltage	D12:12VDC D24:24VDC D48:48VDC
电压范围 Voltage range	D12:12~14V D24:24~28V D48:48~55V
额定输出电流 Rated output current	D12:10A D24:5A D48:2.5A
输出功率 Output power	120W
工作温度范围 Operating temperature range	-20℃~+70℃
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	200241527
图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below	

		MATERIAL:		SURFACE/COLOR:			
		MAT NO./REV:		/ 00		MAT STATUS: 小批量	
APPD: LGL	2024.05.27	NAME DPS1-120W-DXX-02Z (H)					
CHKD: MEK	2024.05.27						
DRFT: GXJ	2024.05.27						
 A4		DRAWING NO. 200267656		TYPE CUSTOMER DRAWING		DRAWING STATUS work	
						SCALE 1:1	
						SHEET 1/2	

00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

AB

D

6