

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。未经许可，不得复制或传播。

FOR-1755 Rev.2.0






2

3

4

5

6

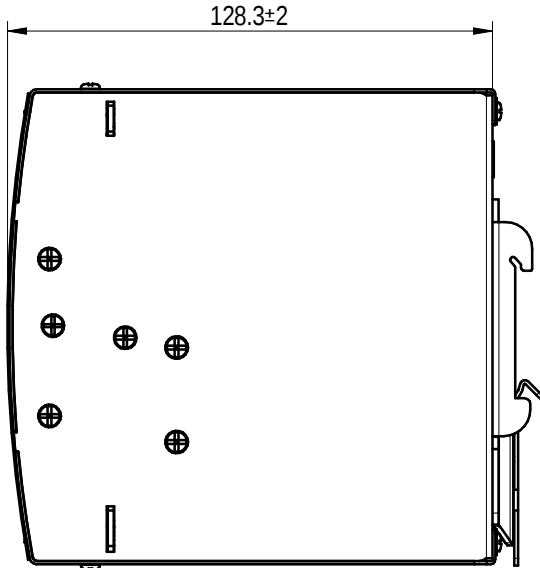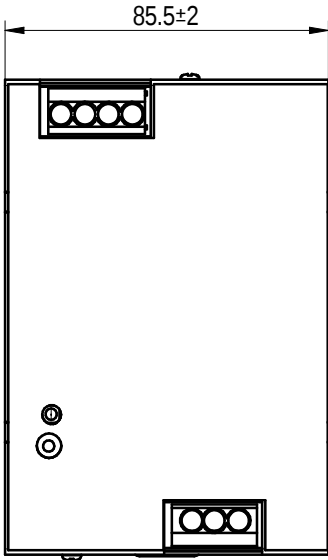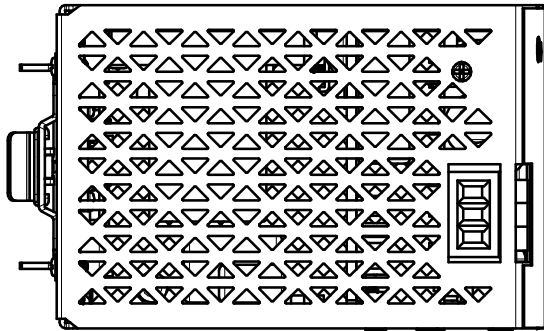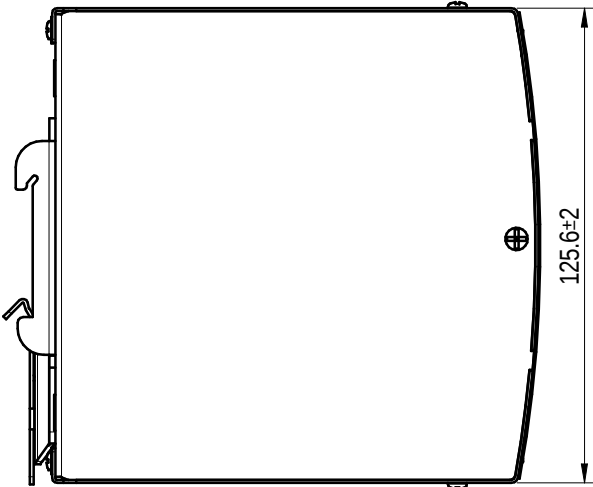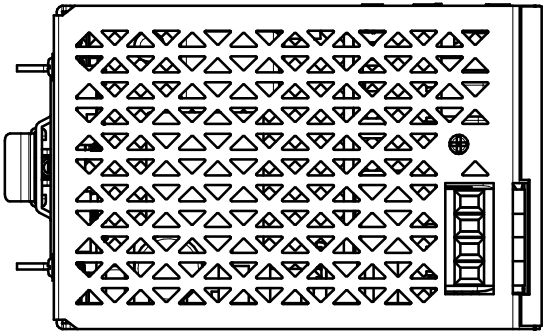

未注公差/General tolerances (mm)														0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	±2'	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

输入电压范围 Input voltage range	90~264VAC 127~370VDC
额定输出电压 Rated output voltage	D24:24VDC D48:48VDC
电压范围 Voltage range	D24:24~28V D48:48~55V
额定输出电流 Rated output current	D24:20A D48:10A
输出功率 Output power	480W
工作温度范围 Operating temperature range	-20℃~+70℃
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	200241527
图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below	



			MATERIAL:		SURFACE/COLOR:			
			MAT NO./REV:		MAT STATUS: 小批量			
APPD: LGL			2024.05.27		NAME			
CHKD: MEK			2024.05.27					
DRFT: GXJ			2024.05.27		DPS1-480W-DXX-02Z (H)			
DRAWING NO.			TYPE		DRAWING STATUS		SCALE	SHEET
200267659			CUSTOMER DRAWING		work		2:1	1/2
								

00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。未经许可，不得复制或传播。

FOR-1755 Rev.2.0

2

3

4

5

6



额定输出电压/电流 Rated output voltage/current

型号品名
model

电压范围
voltage range

型号列表/model list:

订货型号举例
Order type
DPS1-480W-D24-02ZH
DPS1-480W-D48-02ZH

型号品名
model
DPS1-480W-D24
DPS1-480W-D48

额定输出电压/电流
Rated output voltage/current
24V ---20A
48V ---10A

电压范围
voltage range
24~28V
48~55V

模板template:

未注公差/General tolerances(mm)														0.1/10		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	±2°		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			
输入电压范围 Input voltage range													90~264VAC 127~370VDC			
额定输出电压 Rated output voltage													D24:24VDC D48:48VDC			
电压范围 Voltage range													D24:24~28V D48:48~55V			
额定输出电流 Rated output current													D24:20A D48:10A			
输出功率 Output power													480W			
工作温度范围 Operating temperature range													-20℃~+70℃			
重点管控符号/Key controlled symbol													*			
包装规范/Packaging specification													200241527			
图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below																



00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

			MATERIAL:			SURFACE/COLOR:		
APPD: LGL			MAT NO./REV:			MAT STATUS: 小批量		
CHKD: MEK			NAME			DPS1-480W-DXX-02Z(H)		
DRFT: GXJ			DRAWING NO.		TYPE		DRAWING STATUS	
A4			200267659		CUSTOMER DRAWING		work	
			SCALE		SHEET		1:1	
							2/2	