

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留所有权利。未经许可，不得复制或传播。

FOR-1755 Rev.2.0

2

3

4


5

6


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	


输入电压范围	180 ~ 550VAC
Input voltage range	254 ~ 780VDC
额定输出电压	D24:24VDC
Rated output voltage	D48:48VDC
电压范围	D24:24 ~ 28V
Voltage range	D48:48 ~ 55V
额定输出电流	D24:10A
Rated output current	D48:5A
输出功率	240W
Output power	
工作温度范围	-30℃ ~ +70℃
Operating temperature range	
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	200241527
图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below	

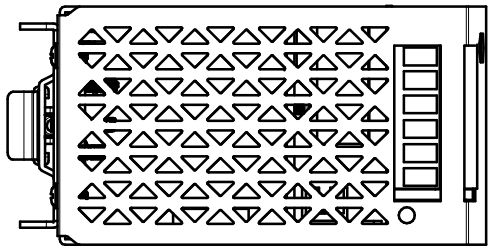


112.8±2

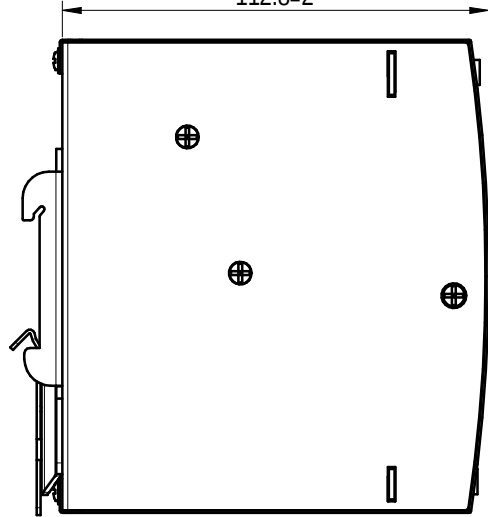


63±2

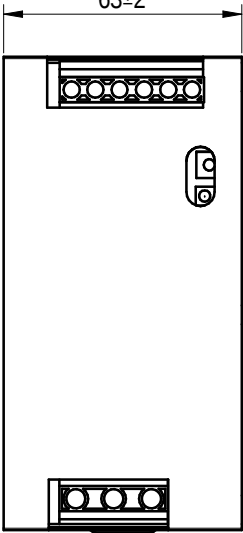

125.2±2

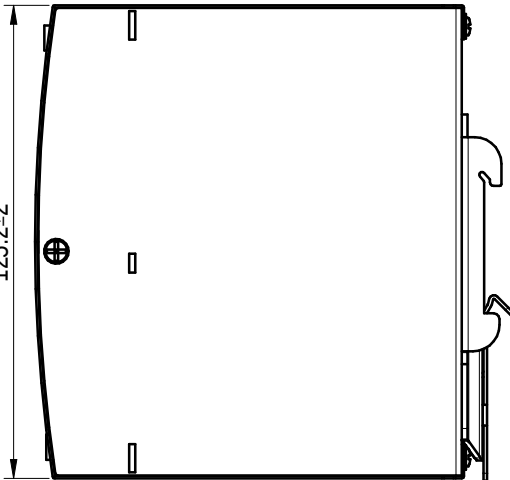

active

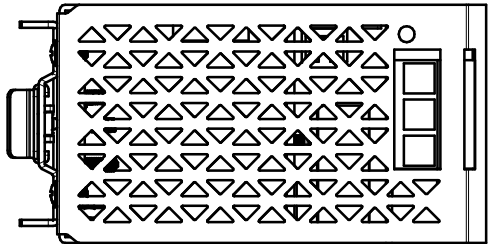

MATERIAL:	SURFACE/COLOR:	
MAT NO./REV:	/ 00	
NAME	DPS1-WI-240W-DXX-02Z (H)	
DRAWING NO.	TYPE	DRAWING STATUS
200270503	CUSTOMER DRAWING	work
SCALE	SHEET	
2:1	1/2	

00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6

48~55V

00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

未注公差/General tolerances (mm)														 0.1/10  ±2°	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		
														输入电压范围 Input voltage range	180 ~ 550VAC 254 ~ 780VDC
														额定输出电压 Rated output voltage	D24:24VDC D48:48VDC
														电压范围 Voltage range	D24:24 ~ 28V D48:48 ~ 55V
														额定输出电流 Rated output current	D24:10A D48:5A
														输出功率 Output power	240W
														工作温度范围 Operating temperature range	-30℃ ~ +70℃
														重点管控符号/Key controlled symbol	*
														包装规范/Packaging specification	200241527
														图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below	

active 

A

B

C

D