

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violation will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留对涉及发明、实用新型、外观设计、软件著作权、集成电路布图设计专有权、商业秘密等权利的所有权利。

FOR-1755 Rev.2.0


2

3

4



5

6


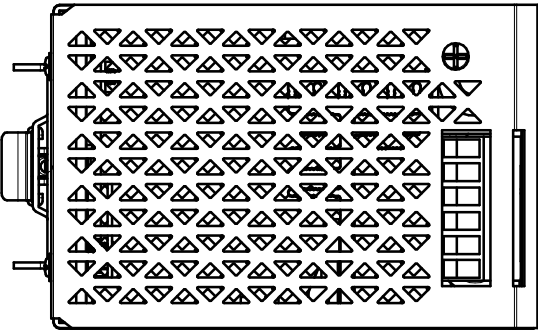


128±2

85.5±2

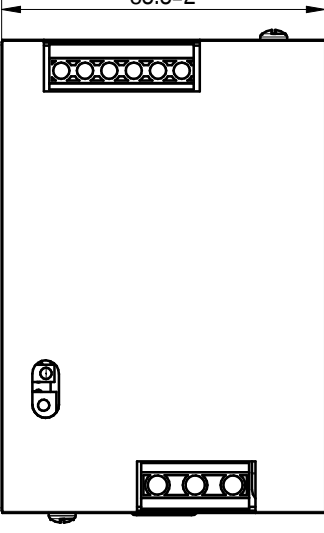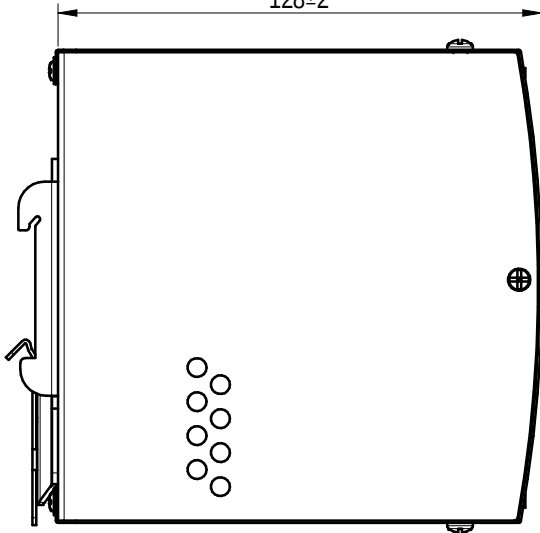

125.2±2

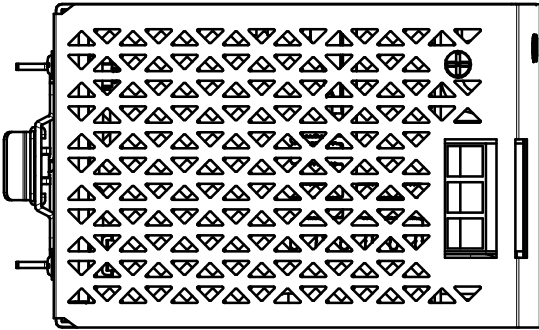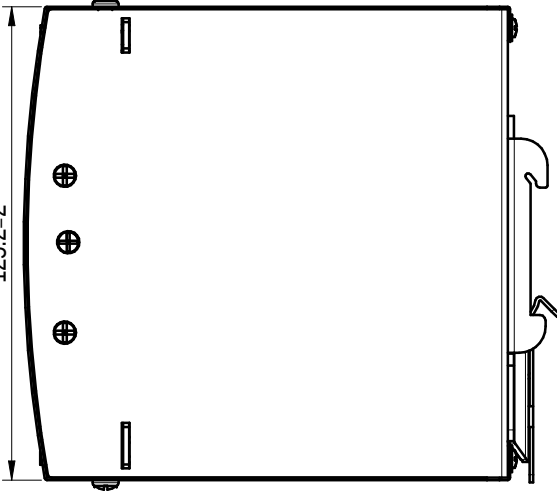

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

输入电压范围 Input voltage range	180 ~ 550VAC 254 ~ 780VDC
额定输出电压 Rated output voltage	D24:24VDC D48:48VDC
电压范围 Voltage range	D24:24 ~ 28V D48:48 ~ 55V
额定输出电流 Rated output current	D24:20A D48:10A
输出功率 Output power	480W
工作温度范围 Operating temperature range	-30℃ ~ +70℃
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	200241527
图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below	



			MATERIAL:		SURFACE/COLOR:									
			MAT NO./REV:		MAT STATUS: 小批量									
APPD: LGL			2024.05.27		NAME DPS1-WI-480W-DXX-02Z (H)									
CHKD: MEK			2024.05.27											
DRFT: GXJ			2024.05.27											
① ② A4					DRAWING NO.		TYPE		DRAWING STATUS		SCALE		SHEET	
					200270504		CUSTOMER DRAWING		work		2:1		1/2	

00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，其他一切权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.2.0

2

3

4

5

6

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

输入电压范围 Input voltage range	180 ~ 550VAC 254 ~ 780VDC
额定输出电压 Rated output voltage	D24:24VDC D48:48VDC
电压范围 Voltage range	D24:24 ~ 28V D48:48 ~ 55V
额定输出电流 Rated output current	D24:20A D48:10A
输出功率 Output power	480W
工作温度范围 Operating temperature range	-30℃ ~ +70℃
重点管控符号/Key controlled symbol	*
包装规范/Packaging specification	200241527
图中虚线框内印字与下方列表相对应/The words in the dotted box correspond to the list below	

+ + - - 13 14

OUTPUT : 24V ~ 20A

额定输出电压/电流
Rated output voltage/current



POWER SUPPLY

DPS1-WI-480W-D24

型号品名
model

DC OK

24-28V



电压范围
voltage range

INPUT : 200-500V
~ 4A 50/60Hz

L2 L1

型号列表/model list:

订货型号举例
Order type

型号品名
model

额定输出电压/电流
Rated output voltage/current

电压范围
voltage range

DPS1-W I-480W-D24-02ZH
DPS1-W I-480W-D48-02ZH

DPS1-W I-480W-D24
DPS1-W I-480W-D48

24V ~ 20A
48V ~ 10A

24~28V
48~55V

模板 template:

00		The first release	GXJ	2024.05.27
REV	ECN	DESCRIPTION	DRFT	DATE

			MATERIAL:		SURFACE/COLOR:	
			MAT NO./REV:		/ 00	
			NAME		DPS1-WI-480W-DXX-02Z (H)	
APPD:	LGL	2024.05.27	DRAWING NO.		TYPE	DRAWING STATUS
CHKD:	MEK	2024.05.27	200270504		CUSTOMER DRAWING	work
DRFT:	GXJ	2024.05.27	SCALE		1:1	SHEET
			A4		2/2	