


## WA Series IP67

Material and spec	30 02	-
Number of contact	3+PE	6+PE
Contact diameter (mm)	ø2	Ø1.5
Rated voltage (AC.V)	400	250
Rated current (A)	16	10
Wire size (mm <sup>2</sup> /AWG)	≤2.5/14	≤0.75/18
Termination	Screw	Solder
Test voltage(AC.V)1min	2000	
Insulation resistance $(M\Omega)$	2000	
Shell material	Nylon66, fire resistance: V-0	
Contact material	Brass with gold plating	
Temperature range	-40℃~+85℃	
Mating cycle	500	

Part number	Description	Drawing
WA22J4TK2	3+PE male cable connector with short back shell, screw termination	1: 4.5-7mm, II: 7-12mm Cable outer diameter range
WA22J7TK1	6+PE male cable connector with short back shell, solder termination	

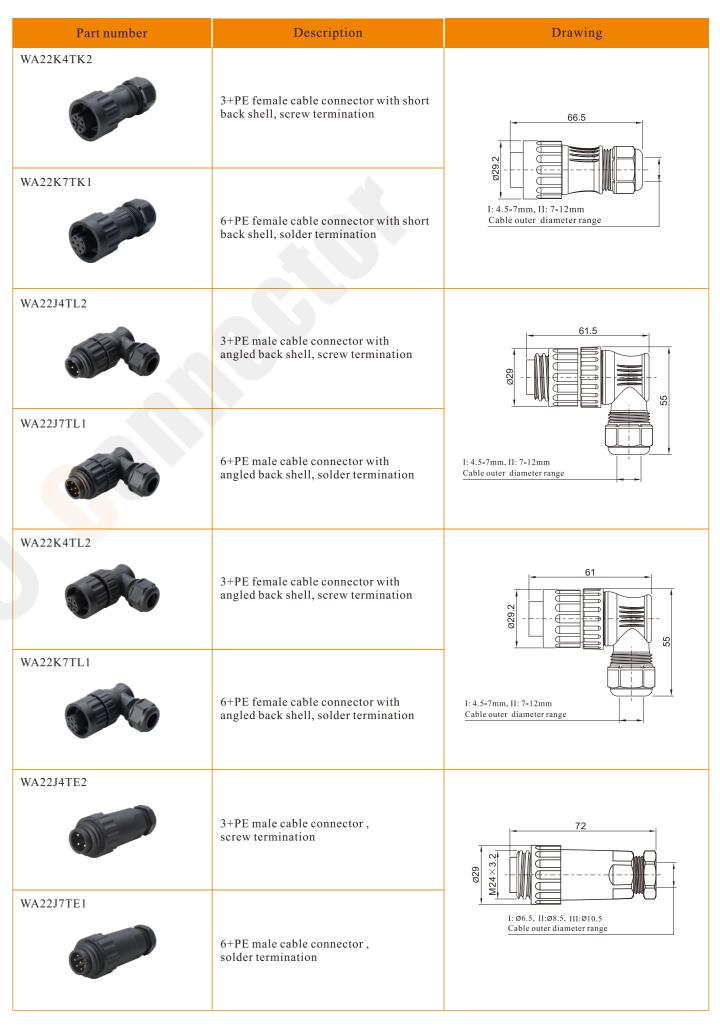

P07-01

Part number	Description	Drawing
WA22K4Z2	3+PE female panel connector, screw termination	Panel cutout    2
WA22K7Z1	6+PE female panel connector, solder termination	Panel cutout  9 18 9 18 9 18 9 18
WA22K4ZE2	3+PE female cable connector, screw termination	1:06.5, II:08.5, III:010.5 Cable outer diameter range
WA22K7ZE1	6+PE female cable connector, solder termination	
WA22J4Z2	3+PE male panel connector, screw termination	Panel cutout    2
WA22J7Z1	6+PE male panel connector, solder termination	Panel cutout  94  31  31  38  8  18.5
WA22G1	Cap 1 Cap for Male	929 Ø29
WA22G2	Cap 2 Cap for Female	©24 ©29



