

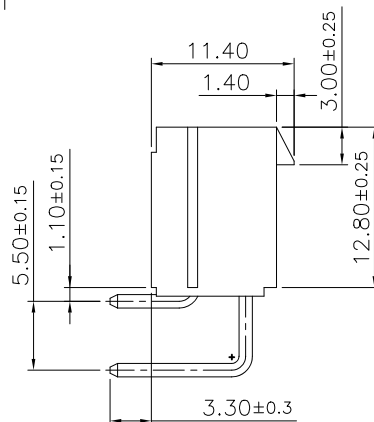


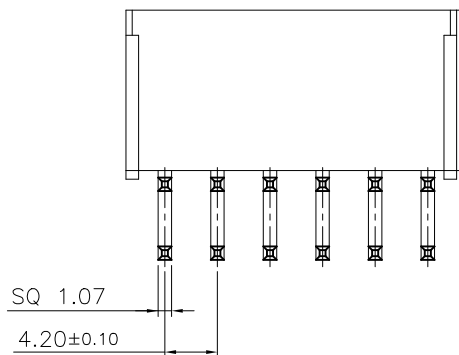

Last Circuit

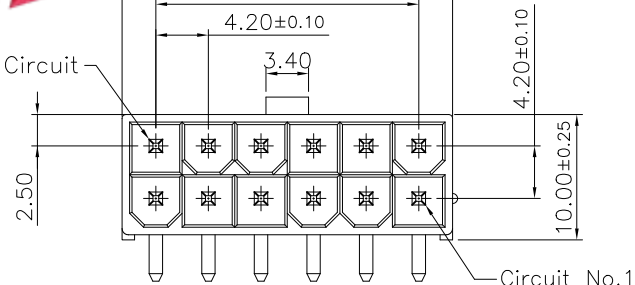

Dimension Information:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

Specifications:

Current Rating: 9.0A AC/DC
Voltage Rating: 600V AC/DC
Contact Resistance: 10m ohm. Max.
Insulation Resistance: 1000M ohm. Min.
Withstanding Voltage: 1500V AC For One Minute
Operating Temperature Range: -40°C To +105°C


Materials:

Insulator: High Temperature Plastic (UL94V-0)
Insulator Color: Natural/Black
Contact: Copper Alloy
Plating: Bright Tin/Matte Tin Plated

How To Order

2269R-XXX-MX-XX-F5


Blank Natural
BK:Black
Blank Bright Tin
MT:Matte Tin Plated
No. of Contacts
Right Angle Type

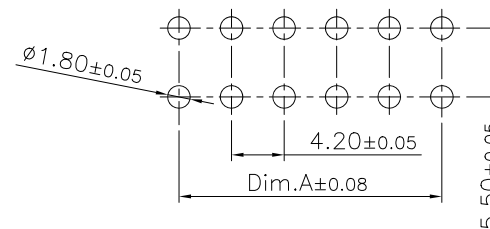

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.		
E								
D				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 4.2mm Power Wafer Double Rows R/A Without Flange Type		SIZE A4
C	20-JUN-2024	Add Plated Option	Yizhen		SCALE: 1:1			
B	27-SEP-2023	Modify Packing List	Lisy	APPROVAL: Rory Chen	SHEET: 1/3	PART NO: 2269R-XXX-MX-XX-F5 		
A	30-JUN-2023		Lisy		PROJECTION: 			
REV	DATE	FILE	BY					

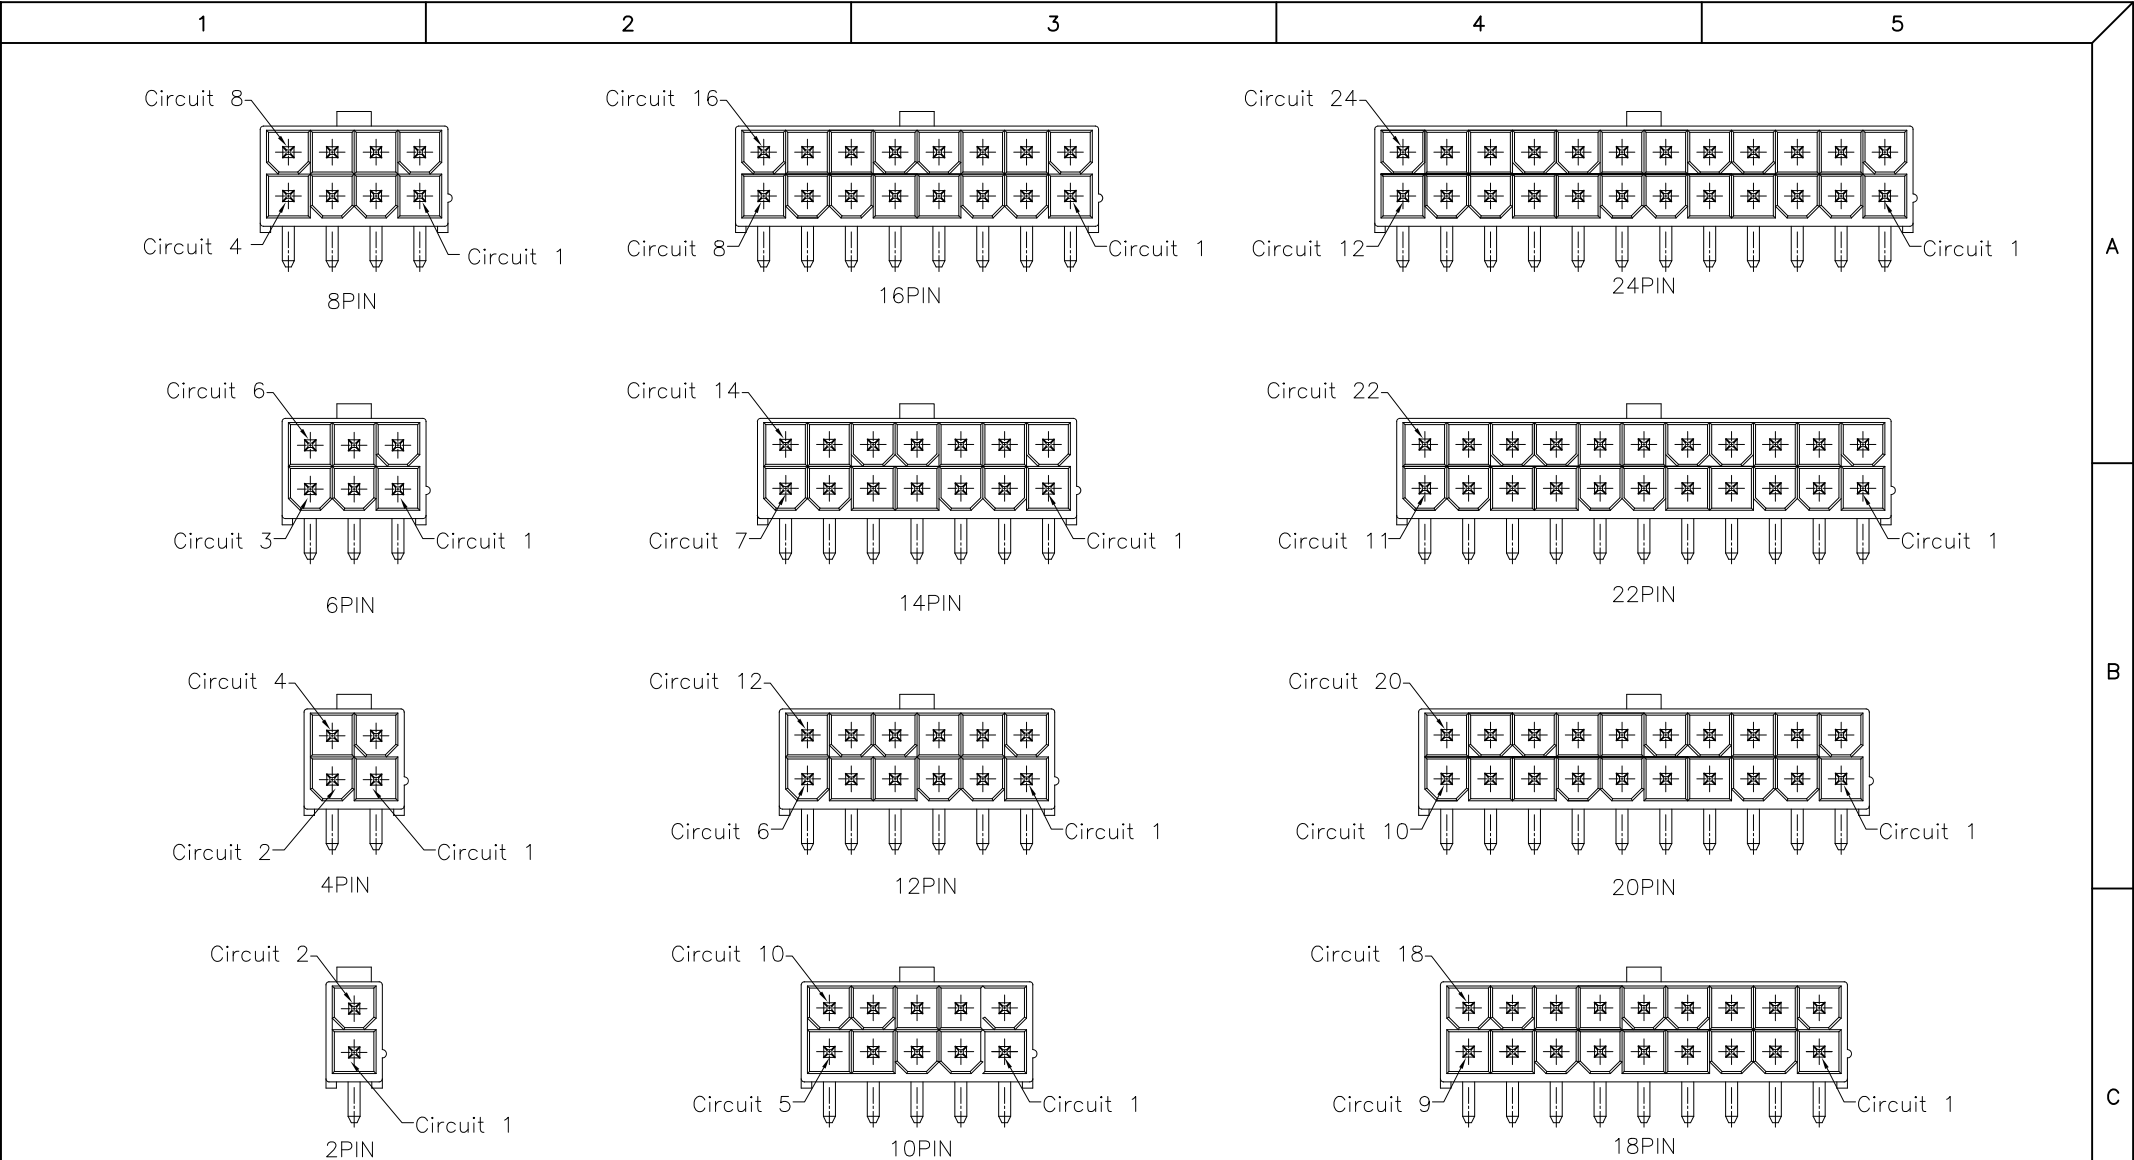

2~24P Protection Key Drawing(Ref.)

RoHS Compliant

F				DRAWN: Lisy Liu	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.			DESCRIPTION: 4.2mm Power Wafer Protection key Drawing	SIZE A4	D
E											
D											
C	20-JUN-2024	Add Plated Option	Yizhen	CHECKED: Jerry Chen	UNIT: MM						
B	27-SEP-2023	Modify Packing List	Lisy		SCALE: 1:1						
A	30-JUN-2023		Lisy	APPROVAL: Rory Chen	SHEET: 2/3	PART NO: 2269R-XXX-MX-XX-F5 					
REV	DATE	FILE	BY		PROJECTION: 						

