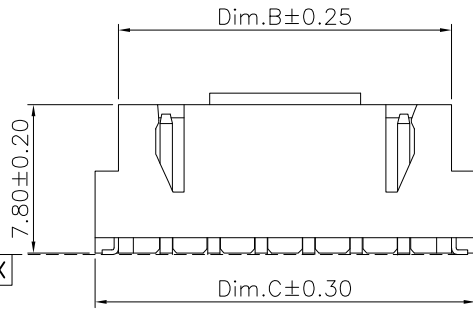
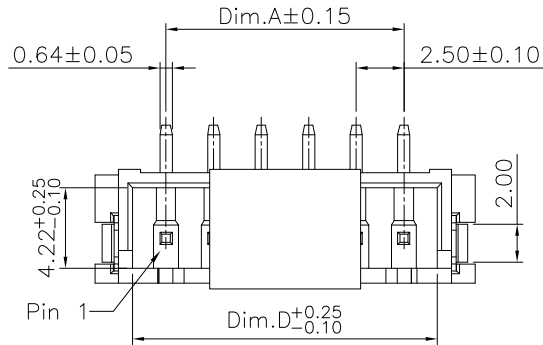


Contacts	A	B	C	D	Contacts	A	B	C	D
02	2.50	7.50	10.00	6.00	10	22.50	27.50	30.00	26.00
03	5.00	10.00	12.50	8.50	11	25.00	30.00	32.50	28.50
04	7.50	12.50	15.00	11.00	12	27.50	32.50	35.00	31.00
05	10.00	15.00	17.50	13.50	13	30.00	35.00	37.50	33.50
06	12.50	17.50	20.00	16.00	14	32.50	37.50	40.00	36.00
07	15.00	20.00	22.50	18.50	15	35.00	40.00	42.50	38.50
08	17.50	22.50	25.00	21.00	16	37.50	42.50	45.00	41.00
09	20.00	25.00	27.50	23.50					

Specifications:

Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm Max
Insulation Resistance:1000M ohm Min.
Withstanding Voltage:1000V AC/Minute
Operating Temperature Range:-25°C To +85°C


Material and Finish:

Insulator:LCP (UL94V-0)
Insulator Color:Ivory
Contact:Brass
Plating:Tin Plated
Metal Tab:Brass,Tin Plated

How To Order:


2317SJ-XX-SMA-CR

CR:Cap+Tape&Reel
SMD Type
No. Of Contacts
Straight Type

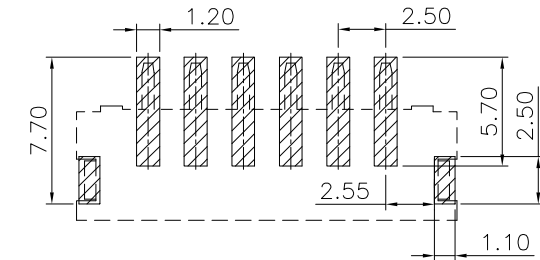

PCB Layout

RoHS Compliant

F				DRAWN: Jamie	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: Jerry	UNIT: MM	DESCRIPTION: 2.5mm Wafer 180° Straight SMD Type	
C					SCALE: 1:1		
B				APPROVAL: Rory	SHEET: 1/1	PART NO: 2317SJ-XX-SMA-CR	
A	20-JUL-2020		Jamie		PROJECTION: 		
REV	DATE	FILE	BY				

A4