



Section A-A



Specifications:
Voltage Rating: 50V AC,DC
Contact Resistance: 30m ohm.Max
Insulation Resistance: 500M ohm.Min
Operating Temperature Range:-25°C ~ +85°C





Material:
Insulator: Thermoplastic (UL94V-0)
Insulator Color: Natural
Contacts: Copper Alloy
Plated: Tin Plated
Zif Insulator: Thermoplastic (UL94V-0)
Zif Insulator Color: Black
Fitting Nail: Copper Alloy, Tin Plated

How To Order
1223-XXX-02-H25-XX

Blank Tube
TR:Tape & Reel
Plastic Height=2.5mm
Bottom contact type
Blank Matte Tin Plated
G:Gold Plated
No. of Contacts

Pin.no	DimA	DimB	DimC	Pin.no	DimA	DimB	DimC	Pin.no	DimA	DimB	DimC
4	3.0	5.03	11.10	17	16.0	18.03	24.10	30	29.0	31.03	37.10
5	4.0	6.03	12.10	18	17.0	19.03	25.10	31	30.0	32.03	38.10
6	5.0	7.03	13.10	19	18.0	20.03	26.10	32	31.0	33.03	39.10
7	6.0	8.03	14.10	20	19.0	21.03	27.10	33	32.0	34.03	40.10
8	7.0	9.03	15.10	21	20.0	22.03	28.10	34	33.0	35.03	41.10
9	8.0	10.03	16.10	22	21.0	23.03	29.10	35	34.0	36.03	42.10
10	9.0	11.03	17.10	23	22.0	24.03	30.10	36	35.0	37.03	43.10
11	10.0	12.03	18.10	24	23.0	25.03	31.10	37	36.0	38.03	44.10
12	11.0	13.03	19.10	25	24.0	26.03	32.10	38	37.0	39.03	45.10
13	12.0	14.03	20.10	26	25.0	27.03	33.10	39	38.0	40.03	46.10
14	13.0	15.03	21.10	27	26.0	28.03	34.10	40	39.0	41.03	47.10
15	14.0	16.03	22.10	28	27.0	29.03	35.10				
16	15.0	17.03	23.10	29	28.0	30.03	36.10				

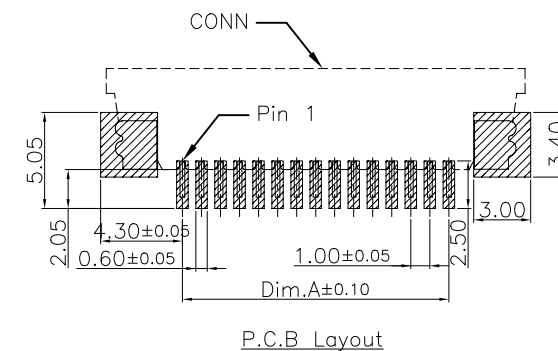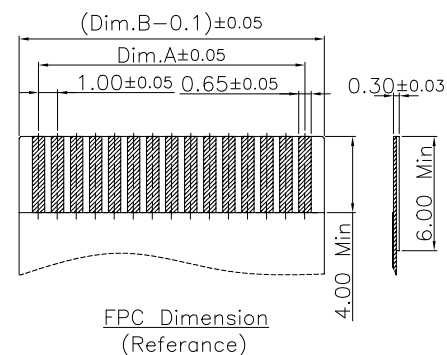

RoHS Compliant

F				DRAWN: SELIN	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10	Neltron Industrial Co., Ltd.	DESCRIPTION: 1.0mm FPC Bottom Contact Type	SIZE A4
E								
D				CHECKED: JERRY	UNIT: MM SCALE: 1:1	PART NO: 1223-XXX-02-H25-XX		
C								
B	25-MAR-2024	Add Packing List	LUCY	APPROVAL: RORY	SHEET: 1/2 PROJECTION:			
A	28-JAN-2015		SELIN					
REV	DATE	FILE	BY					