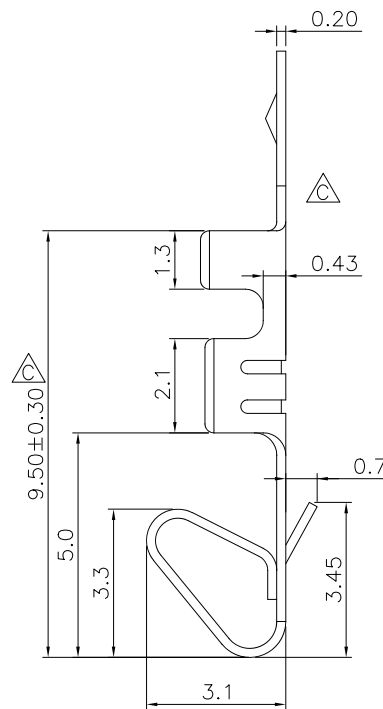
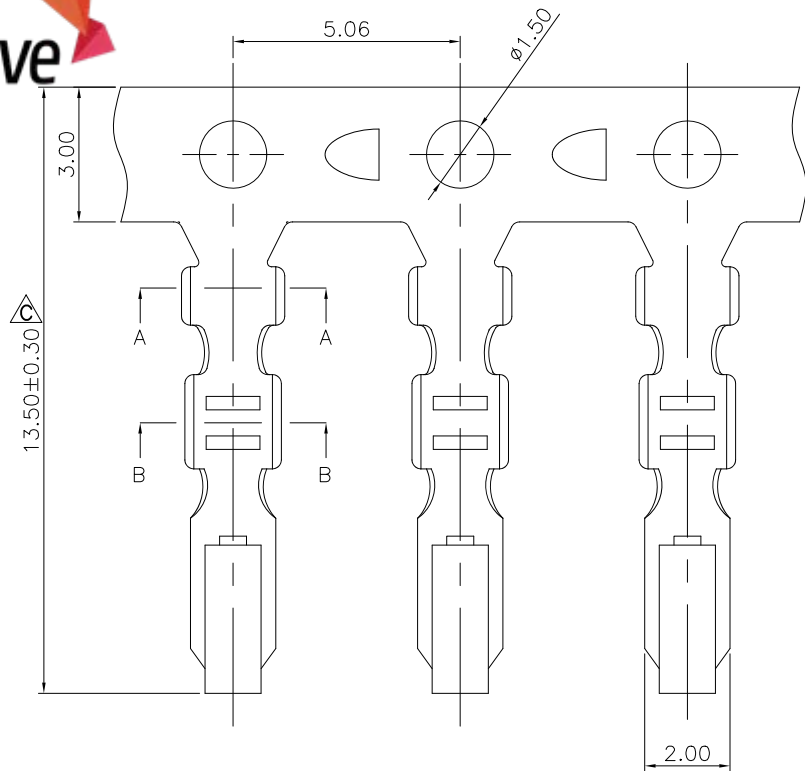


Specifications:

Current Rating:3.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:20m ohm. max.
Withstanding Voltage:1,000V AC/minute
Operating Temperature Range:-40°C~+105°C
Application Wires:AWG 22 to 28
Insulation O.D.: ϕ 1.57mm max.
Mates With 2218H Series Housing

Material and Finish


Contact:Brass
Finish:Tin Plated
Packing:10,000pcs/Reel

How To Order

2218TX-XX

Blank Brass
PH:Phosphor Bronze
Blank Tin Plated
G:Gold Plated
G15:Gold Plated 15u" On Contact Area,
Gold Plated On Other Area.
T:Terminal

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Lisy Liu	.X=±0.20 .XX=±0.15		
D	16-OCT-2024	Modify Plated Option	Lucy	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	19-MAR-2024	Modify Tolerance	Lucy	Jerry Chen	SCALE:	2.54mm Wire To Board Housing Terminal	A4
B	09-FEB-2022		Lisy	APPROVAL:	SHEET: 1/1	PART NO:	
A	04-MAR-2008		Lisy	Rory Chen	PROJECTION: 	2218TX-XX	
REV	DATE	FILE	BY				