





Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/06/08	E	Temperature range was -40°C to +315°C	T.B.	B.S.	
3/07/14	F	positive contact locator pin was in center	T.B.	B.S.	
4/25/14	G	Updated Specification	T.B.	B.S.	
01/27/17	H	Updated UL File number	T.B.	B.S.	
09/03/19	J	Added weight of the part	T.B.	B.S.	

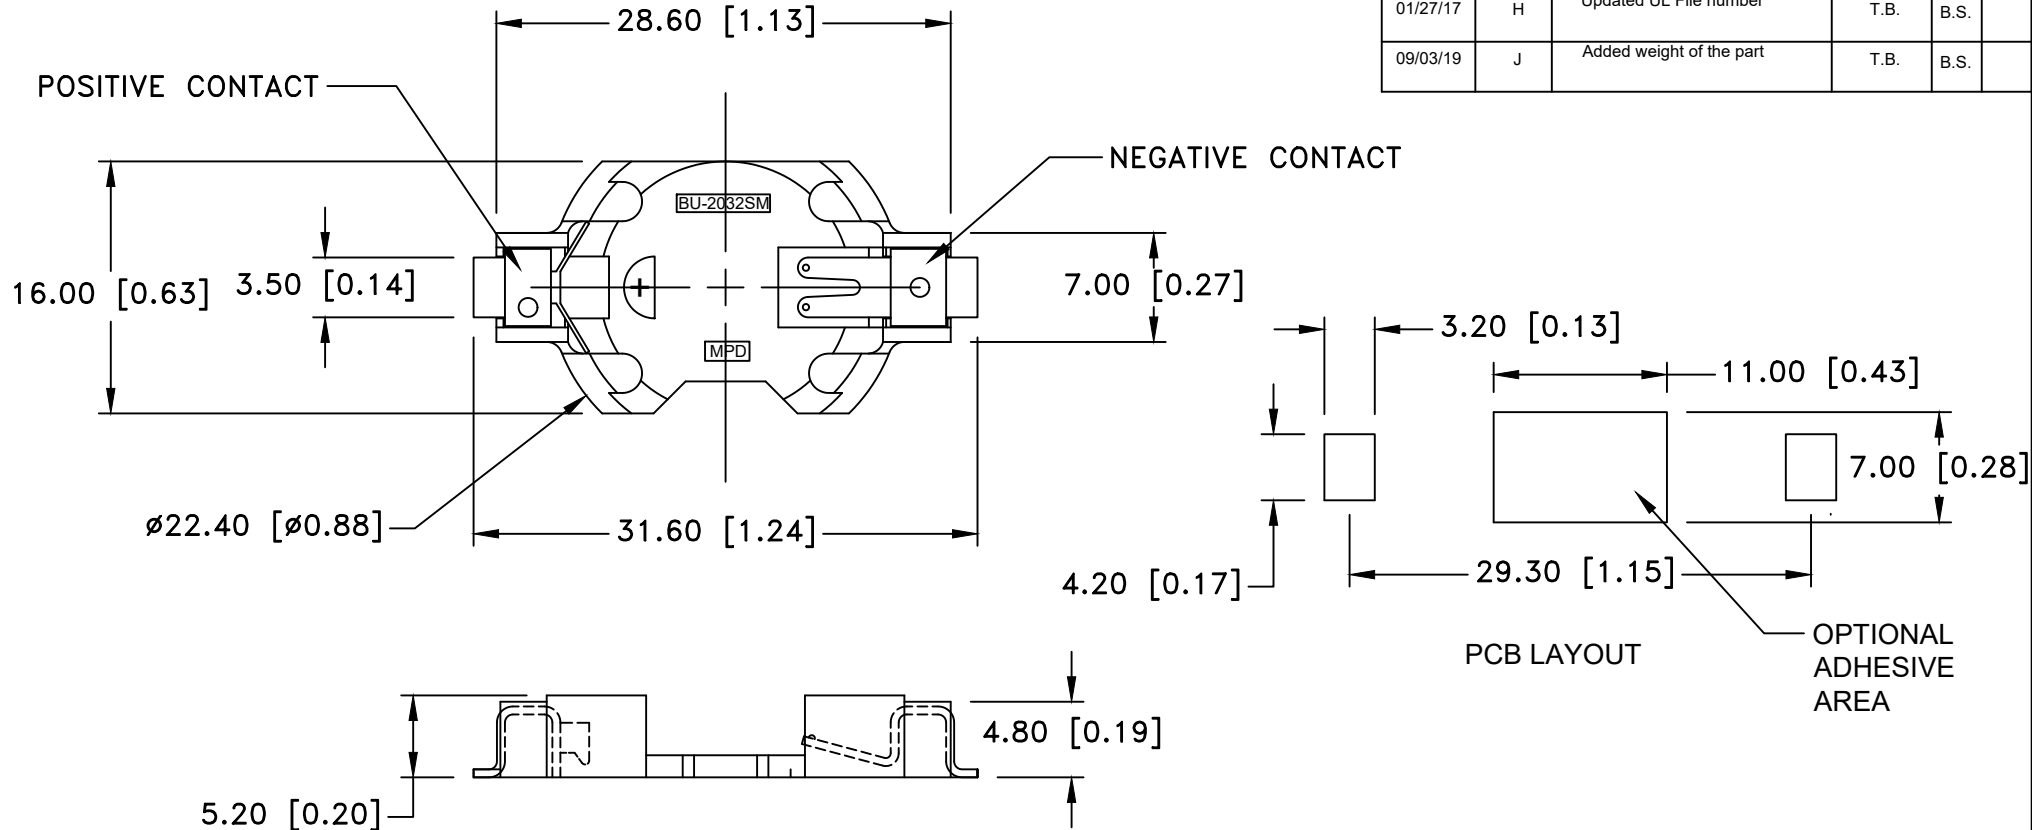

SPECIFICATIONS:

- * Holder material- Off White, Zenite 30% glass reinforced Liquid Crystal Polymer resin, UL File No. E344082, UL94V-0
- * Contacts : STAINLESS STEEL 301, spring temper, Gold Flash overall
- * Temperature range: -40°C to +280°C
- * Vibration Test: 10-50-10 Hz swept in 60 seconds
X,Y,Z direction: 1 hour each direction
- * Result: No dislodgement of the cell or damage
No discontinuity over 10 micro-seconds
- * Shock Test: Half sine wave acceleration 150G. 6 ms
3 shock pulses each direction per axis, total of 18 pulses
- * Result: No evidence of physical damage
- * ROHS COMPLIANT

Estimated Weight: 1.023 g

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title BU2032SM CR2032 SMD BATTERY HOLDER		
Angular ± 3°	Date 09/03/19	Drawing Number BU2032SM-G	