

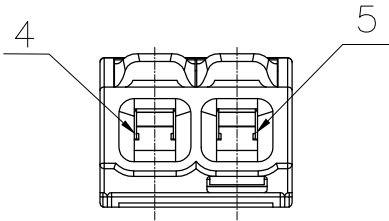


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2'

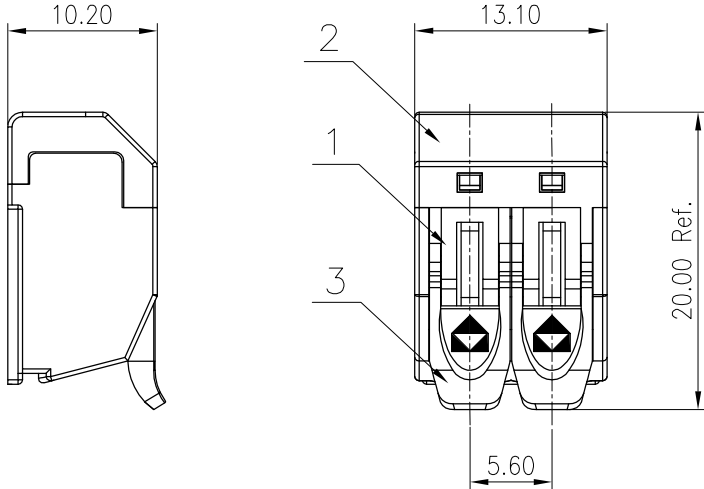

5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:				
额定电压/Rated Voltage(V)		600		
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		Ⅲ/3	Ⅲ/2	Ⅱ/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	450/32	/
工频耐压/Withstanding voltage(V/1Min)		/	AC2500	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)		24~12/0.2~4.0		
剥线长度/Stripping length(mm)		12		
使用温度范围/Operating temperature(°C)		-40~+85 (IEC)		
符合RoHS环保要求/Conform to RoHS		Yes		
Mark"DGBSC-SG01/4-02P": 600V Cu 24-12AWG sol&str				

MATERIAL:		SURFACE:				
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD				
STATUS: /						
APPD: /						
CHKD: /		NAME: DGBSC-SG01/4-02P(1Y-00AH)				
DRFT: /		DRAWING NO.: /				
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET	1/1



REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------