



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

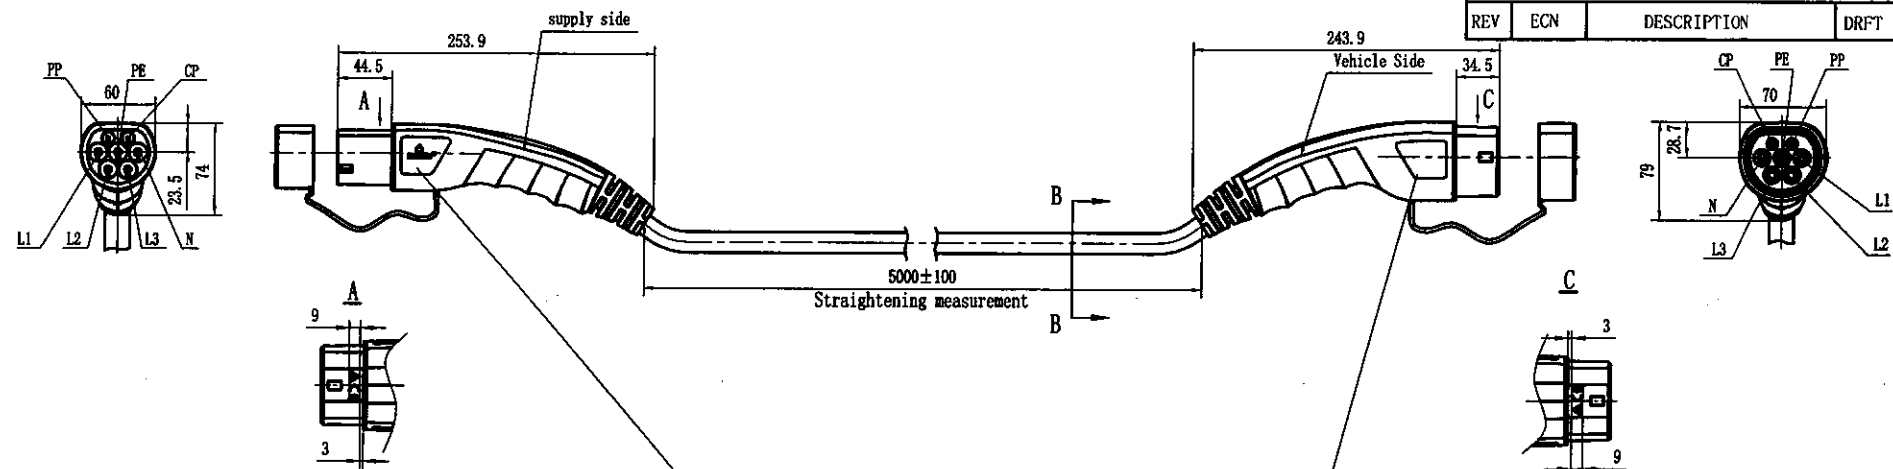

Wiring diagram

POWER SUPPLY ELECTRIC VEHICLE

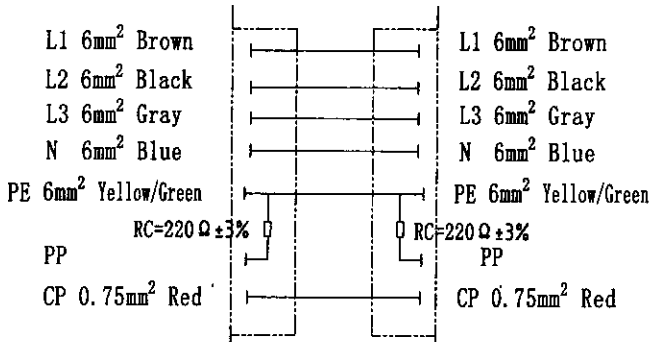

Laser Printing Front Note:

DEGSON®

Laser Printing Back Note(Arial):


MEAC-T-032A-P1-03-5.0M-30AH
32A 440V AC
IEC 62196-2:2016
IP54
201xxxx-xxxx

Laser Printing Front Note(Arial):

MEAC-T-032A-V1-03-5.0M-30AH
32A 440V AC
IEC 62196-2:2016
IP54
201xxxx-xxxx

Laser Printing Back Note:

DEGSON®

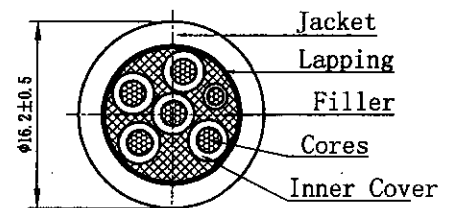

Technical parameters

Rated voltage	440V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstand voltage	L、N AND PE, 2500V AC 1Min
	L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Standard	IEC 62196-2:2016

Customer Drawing

NOTES:

1. Cable: EN50620-2017 EV 5*6mm²+1*0.75mm² Black
2. RoHS Compliance

Size Measure Range ≤6 ±0.05 ±0.10 6~30 ±0.10 ±0.20 30~120 ±0.15 ±0.30 120~400 ±0.20 ±0.50 400~1000 ±0.30 ±0.80 1000~2000 ±0.50 ±1.20 Angle Measure Range .XX .X ±0.5° ±1.0°	PART NO.:		宁波高松电子有限公司 DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
	active		NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A three-phase)	
	APPD: ZX 2220-1.16 CHKD: DT 2220.1.16 DRFT: XF LJO 2020-01-16		MEAC-T-032A-V1P1-03-5.0M-30AH	
	THIRD ANGLE PROJECTION		TITLE: Customer Drawing REV: D0-1 DRAWING NO.: / SHEET: 1/1 DO NOT SCALE DRAWING SCALE: 1:6	