



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

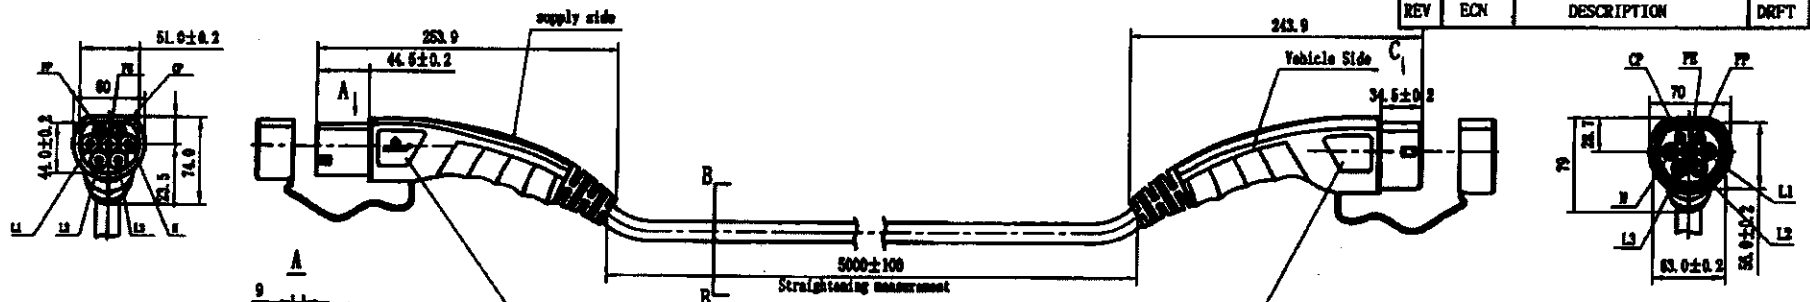

Wiring diagram
POWER SUPPLY ELECTRIC VEHICLE

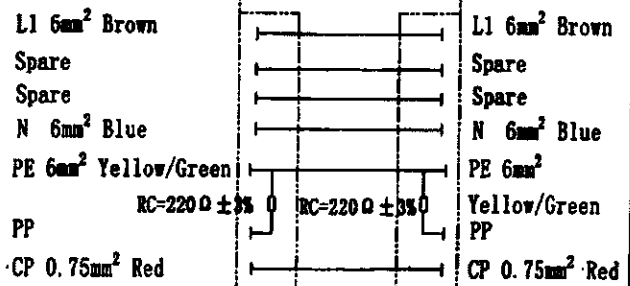


Laser Printing Front Note:
DEGSON

Laser Printing Back Note(Arial):
MEAC-S-032A-P1-03-5.0M-30AH
32A 250V AC
IEC 62196-2:2016
IP54
201xxxx-xxxx

Laser Printing Front Note(Arial):
MEAC-S-032A-V1-03-5.0M-30AH
32A 250V AC
IEC 62196-2:2016
IP54
201xxxx-xxxx

Laser Printing Back Note:
DEGSON

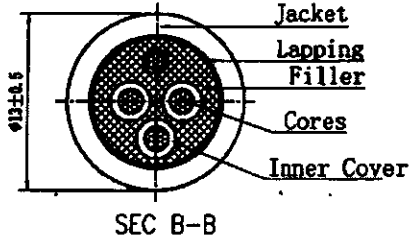

Technical parameters	
Rated voltage	250V AC
Rated current	32A
Temperature range	-30°C~+50°C
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

- NOTES:
1. Cable: EN50620-2017 3*6mm²+1*0.75mm² Black
2. RoHS Compliance

<table border="1"> <thead> <tr> <th>Wire Gauge Range</th> <th>.XX</th> <th>.X</th> </tr> </thead> <tbody> <tr> <td>≤6</td> <td>±0.05</td> <td>±0.10</td> </tr> <tr> <td>6~30</td> <td>±0.10</td> <td>±0.20</td> </tr> <tr> <td>30~120</td> <td>±0.15</td> <td>±0.30</td> </tr> <tr> <td>120~300</td> <td>±0.20</td> <td>±0.50</td> </tr> <tr> <td>300~1000</td> <td>±0.30</td> <td>±0.80</td> </tr> <tr> <td>1000~2000</td> <td>±0.50</td> <td>±1.20</td> </tr> <tr> <th>Angle Gauge Range</th> <th>.XX</th> <th>.X</th> </tr> <tr> <td></td> <td>±0.5°</td> <td>±1.0°</td> </tr> </tbody> </table>	Wire Gauge Range	.XX	.X	≤6	±0.05	±0.10	6~30	±0.10	±0.20	30~120	±0.15	±0.30	120~300	±0.20	±0.50	300~1000	±0.30	±0.80	1000~2000	±0.50	±1.20	Angle Gauge Range	.XX	.X		±0.5°	±1.0°	PART NO.: / active	宁波高松电子有限公司 DEGSON NINGBO DEGSON ELECTRICAL CO., LTD	
	Wire Gauge Range	.XX	.X																											
	≤6	±0.05	±0.10																											
	6~30	±0.10	±0.20																											
30~120	±0.15	±0.30																												
120~300	±0.20	±0.50																												
300~1000	±0.30	±0.80																												
1000~2000	±0.50	±1.20																												
Angle Gauge Range	.XX	.X																												
	±0.5°	±1.0°																												
APP: ZX 2020.1.16 CHK: DT 2020.1.16	NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A single-phase) MEAC-S-032A-V1P1-03-5.0M-30AH		REV: DO-1																											
DRFT: BY L30 0000-01-16	TITLE: Customer Drawing		SHEET: 1/1																											
THIRD ANGLE PROJECTION	DRAWING NO.: /		SCALE: 1:6																											
	(INCH) DO NOT SCALE DRAWING																													