

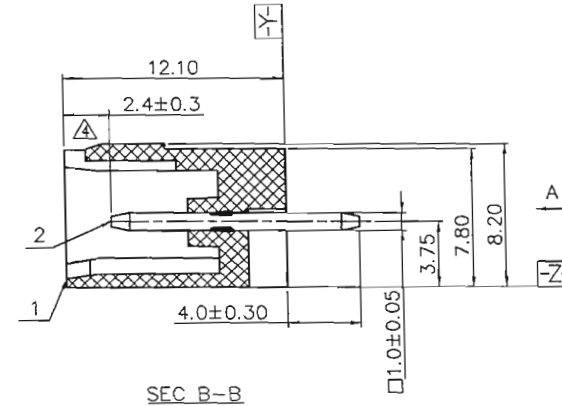
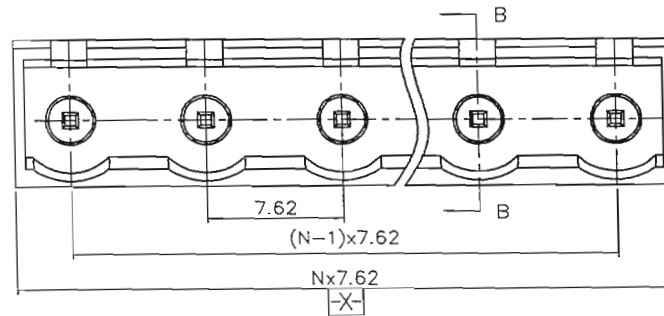



VIEW A

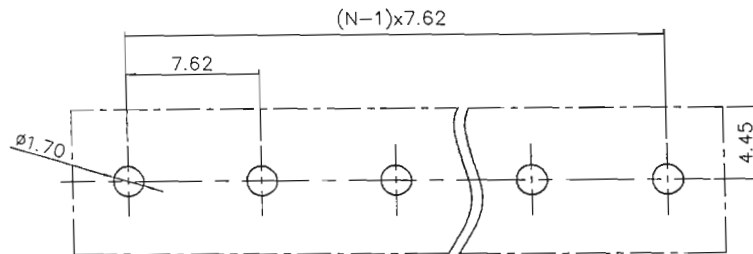

SEC B-B



P.C.B LAYOUT

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

NOTES:

1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.

2.PITCH: 7.62MM ,POLES:N=2-13P

3.RATED VOLTAGE/CURRENT: UL 300V/15A
VDE 400V/20A


4.OPERATION TEMPERATURES: -40℃~+105℃

5.RATED IMPULSE VOLTAGE: 4.0KV

6.INSULATION RESISTANCE: 5000MΩ/DC1000V

7.UNDIMENSIONED TOLERANCES:

2	2EDGV Pin header	1007B00330(H)	XX	COPPER	Sn Plated
1	2EDGVC-7.62 Housing	1023A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS			MATERIAL:		 宁波高正电子有限公司			
	TOLERANCES EXCEPT AS NOTED		FINISH:		DEGSON® DEGSON ELECTRONICS CO., LTD			
	.X ± .XX ± .XXX ±		.X' ± .XX' ± .XXX' ±		PART NO.:		NAME:	
					2EDGVC-7.62-XXP-1Y-00A(H)			
	ANGLES ± 1°		APPD: Aaron 11/23/14		TITLE: ASSEMBLY DRAWING		REV	T6
			CHKD: X m m h s l a p r		DRAWING NO.: 2EDGVC-7.62-E03		SHEET	1/1
THIRD ANGLE PROJECTION		DRFT:HAOYH 04/12/04"		DO NOT SCALE DRAWING		SCALE		

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△		图面更新	csx	04/25/06"
△		将1007B00010改为1007B00030	Hang	05/24/06"
△		增加VDE、CE认证标志	CSX	12/14/07"
△	10-0329	增加标注尺寸	COCO	10/08/10"
△	11-0290	最长线数由12P改为13P	Golden	12/15/11"
△	14-0107	黄铜变紫铜, 料号变更; 工频耐压变更为额定冲击电压	HHJ	12/22/14"