






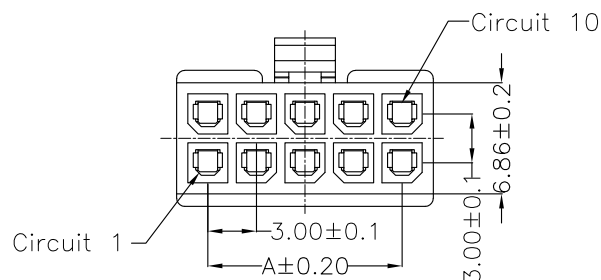







active

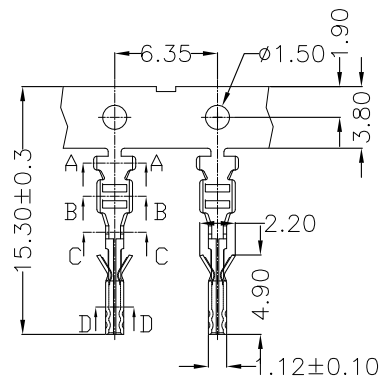

Specifications:
Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:1.500V AC/Minute
Operating Temperature Range:-25°C~+105°C
Material and Finish
Insulator:Nylon66 (UL94V-0)
Insulator Color: Black
Contact:Phosphor Bronze
Plating:Tin Plated
Mating With:5560T terminal
How To Order
5560-XX

No. of Positions

Poles	Dimension		PCS/BAG	Poles	Dimension		PCS/BAG
	A	B			A	B	
02	—	3.85	1,000	14	18.00	21.85	1,000
04	3.00	6.85	1,000	16	21.00	24.85	1,000
06	6.00	9.85	1,000	18	24.00	27.85	1,000
08	9.00	12.85	1,000	20	27.00	30.85	500
10	12.00	15.85	1,000	22	30.00	33.85	500
12	15.00	18.85	1,000	24	33.00	36.85	500

RoHS Compliant

DRAWN:
WXY

CHECKED:
Jeremy Liu

APPROVAL:
Mike Wu

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:



Neltron Industrial Co., Ltd.

DESCRIPTION:

3.0mm Power Receptacle Housing


PART NO:



5560-XX

SIZE

A4

REV	DATE	FILE	BY
B	30-Aug-2010	ECN-CN1008019	WXY
A	27-Feb-2009		WXY

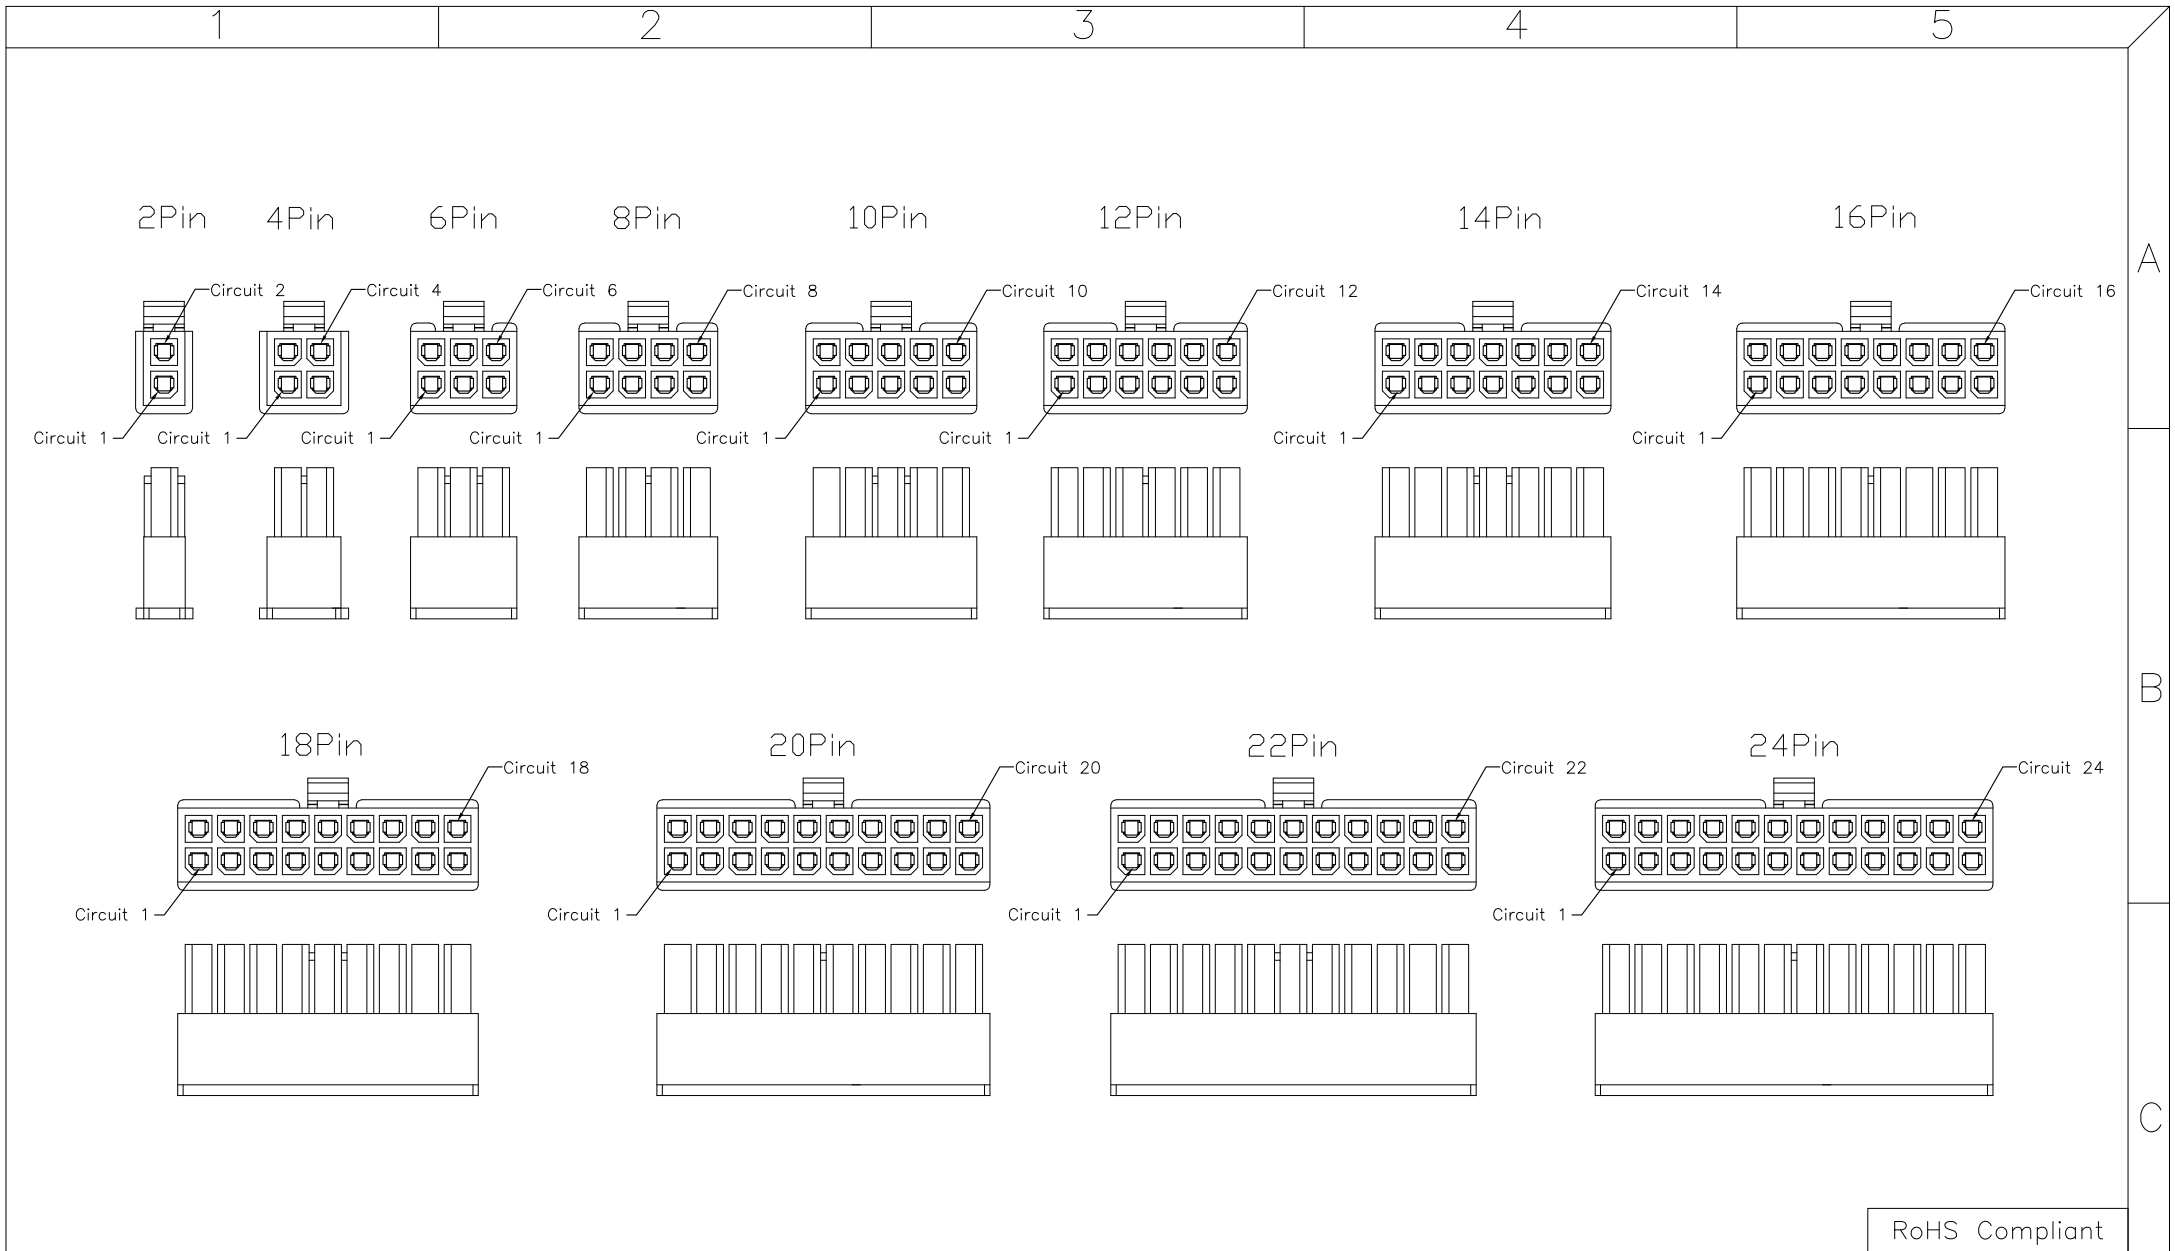

				DRAWN: WXY	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<div> Neltron Industrial Co., Ltd.</div>	
				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION:	SIZE
B	30-Aug-2010	ECN-CN1008019	WXY		SCALE:1:1	3.0mm Power Pulg Housing Protection key Drawing	A4
A	27-Feb-2009	(PC0001)	WXY	APPROVAL: Mike Wu	SHEET: 2/2	PART NO:	
REV	DATE	FILE	BY		PROJECTION: 	5560-XX	