

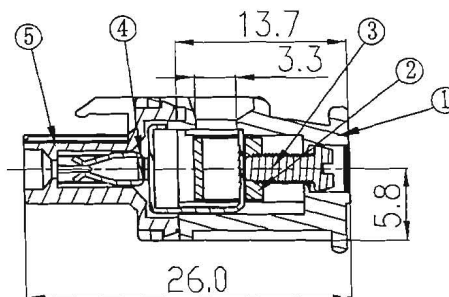

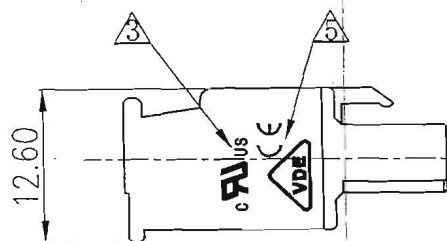
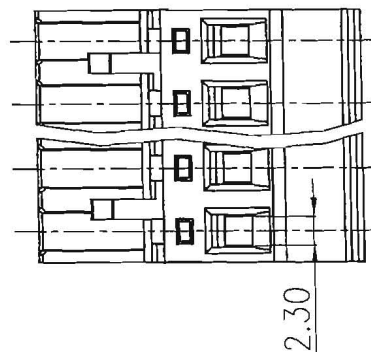


active

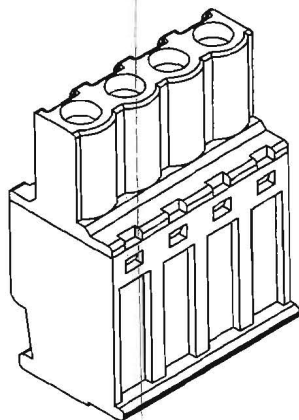

Section A-A

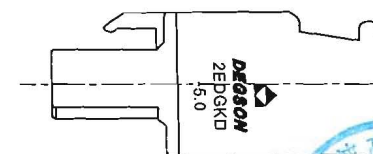

Notes:

- Pitch: 5.0mm, Poles: 2-24P
- Rated voltage/current: UL 300V/15A
VDE 320V/10A
- Operation temperatures: -45°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000Ω/DC1000V
- Wire Range: 28~12AWG, 2.5mm²
- Max. Torque Value: M2.5, 4.08kgf.cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
to	over	over	to	over	over	over	over	over	
6	5	10	30	30	60	100	150	150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/0.10	

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		图面更新	CSX	04/18/06
2		工程变更	CSX	11/30/06
3		增加UL刻字	CSX	03/12/07
4		品名、料号增加环保标示“(H)”	LJH	12/11/07
5		增加VDE、CE刻字	WLM	02/10/09
11-0184		叠板上增加间距刻字	lasting	07/10/11

5	2EDGKA/B-5.0 COVER	1030C0YXXA(H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010(H)	XX	Phospor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980(H)	XX	Steel	Cr ³⁺ Zn
2	DG128 CAGE	X000000020(H)	XX	Brass	Ni plated
1	2EDGKA/B-5.0 HOUSING	1030A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DFTO W/P CHKD <i>leg</i> DATE 04/22/04 INFO DATE APPVL <i>Hang</i> DATE 07/14/11		DATE 04/22/04 DATE DATE 07/14/11	
TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ±		MATERIAL: G.E.: FINISH: SCALE:	
ANGLES ± 1° THIRD ANGLE PROJECTION		NAME 2EDGKA-5.0-XXP-1Y-00A(H) DRAWING NO. 2EDGKA-5.0-E01 /PART NO. DO NOT SCALE DRAWING	
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD.		SIZE A3 REV T6 07/10/11	
SHEET 1 OF 1		SHEET 1 OF 1	