



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



active



2P

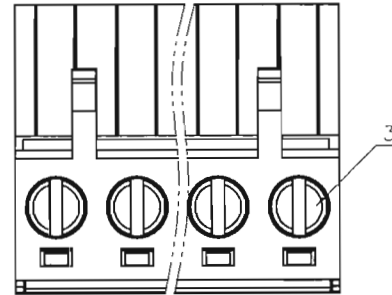


3

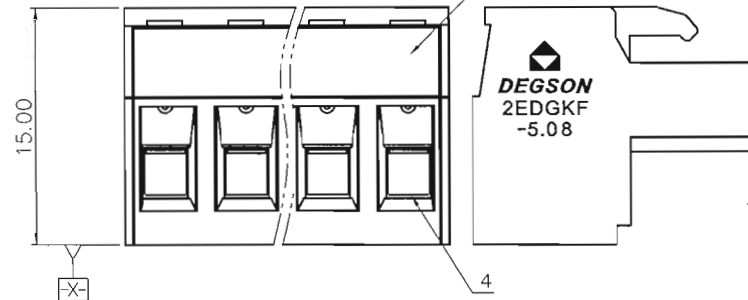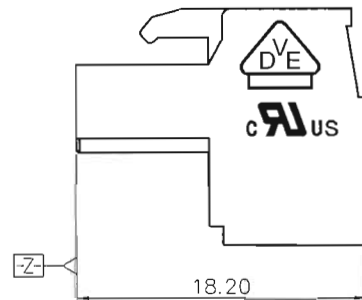
DEGSON
2EDGKF
-5.08

15.00

18.20

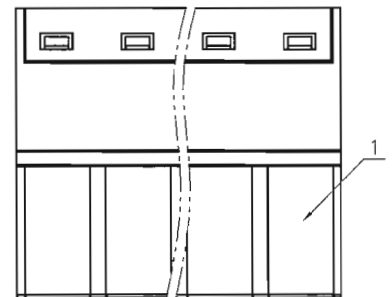

1

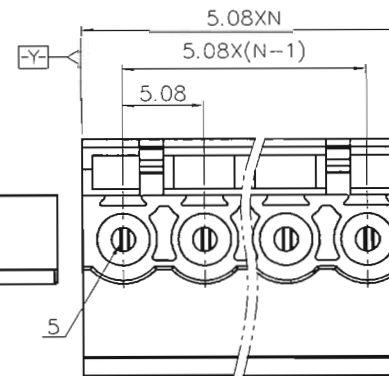

5.08XN

5.08X(N-1)

5.08

5

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 15A
2. Withstanding Voltage : AC1600V/1Min.
3. Torque Value : M3 , 4.43Lb.in
4. Wire Range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

2. Torque Value : M3 , 0.5N.m
3. Wire Range : 0.2~2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.08mm, Poles : N=2~24P
3. Stripping length : 7-8mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm			
Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.30	±0.50	±0.50	±0.70	±1.00	±1.30
±0.50	±0.70	±0.70	±1.00	±1.30	±2.0

6. RoHS Compliance

文管中心
研发专用
2015.09.26
(仅限内部使用,对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
5	CLAMP	COPPER ALLOY	Sn plated
4	CAGE	COPPER ALLOY	Ni plated
3	SCREW	STEEL	Zn plated
2	COVER	PA66	UL94V-0
1	HOUSING	PA66	UL94V-0

PART NO.:

/

APPD:

Aron 1/2-15


CHKD:

Xm9/2/15

DRFT:

XXY 08/21/15"

DETACHED LISTS



THIRD ANGLE PROJECTION

DEGSON®

宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

2EDGKF-5.08-XXP-1Y-1000A(H)

TITLE: CUSTOMER DRAWING

REV

TO

DRAWING NO.:

2EDGKF-5.08-C01

SHEET

1/1

DO NOT SCALE DRAWING

SCALE

1:1