
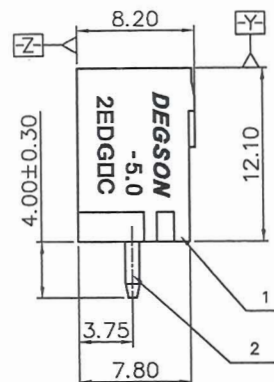
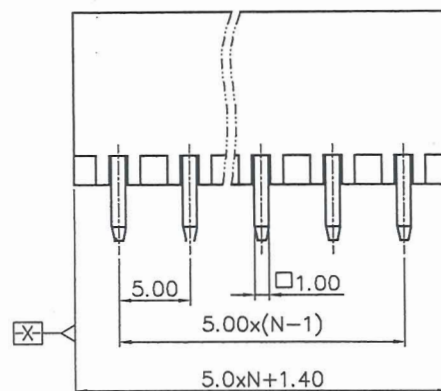


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

active

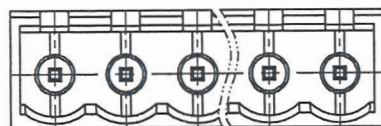

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 15A

2. Withstanding Voltage : AC1600V/1Min.

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009



2. Pitch : 5.0mm, Poles : N=02~06P

3. Operating temperature: -40°C~+105°C

4. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm					
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150		0.1/10
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150		<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

5. RoHS Compliance

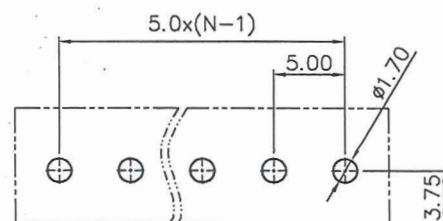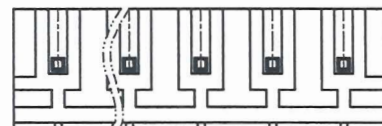

PCB LAYOUT

文管中心
研发专用

2016. 3. 14

(仅限内部使用, 对外无效)

2	PIN	COPPER ALLOY	Sn PALTED
1	HOUSING	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /		宁波高松电子有限公司	
APPD: <i>Adron 12/13</i>		DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: <i>XLM 12/15</i>		NAME: 2EDGVC-5.0-XXP-1Y-00A(H) •	
DRFT: XLM 12/07/15"		TITLE: CUSTOMER DRAWING	
THIRD ANGLE PROJECTION		DRAWING NO.: 2EDGVC-5.0-C22	REV TO
		DO NOT SCALE DRAWING	SHEET 1/1
		SCALE	1:1