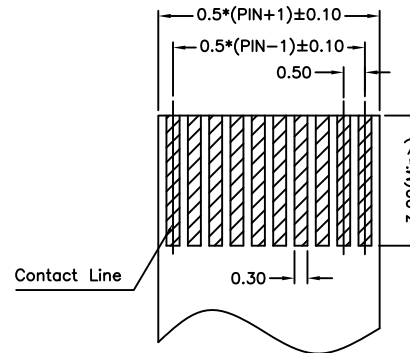



Contacts Dimension:

PIN NO	A	B	C	PIN NO	A	B	C	PIN NO	A	B	C	PIN NO	A	B	C
4	1.50	2.60	7.70	16	7.50	8.60	13.70	28	13.50	14.60	19.70	40	19.50	20.60	25.70
5	2.00	3.10	8.20	17	8.00	9.10	14.20	29	14.00	15.10	20.20	41	20.00	21.10	26.20
6	2.50	3.60	8.70	18	8.50	9.60	14.70	30	14.50	15.60	20.70	42	20.50	21.60	26.70
7	3.00	4.10	9.20	19	9.00	10.10	15.20	31	15.00	16.10	21.20	43	21.00	22.10	27.20
8	3.50	4.60	9.70	20	9.50	10.60	15.70	32	15.50	16.60	21.70	44	21.50	22.60	27.70
9	4.00	5.10	10.20	21	10.00	11.10	16.20	33	16.00	17.10	22.20	45	22.00	23.10	28.20
10	4.50	5.60	10.70	22	10.50	11.60	16.70	34	16.50	17.60	22.70	46	22.50	23.60	28.70
11	5.00	6.10	11.20	23	11.00	12.10	17.20	35	17.00	18.10	23.20	47	23.00	24.10	29.20
12	5.50	6.60	11.70	24	11.50	12.60	17.70	36	17.50	18.60	23.70	48	23.50	24.60	29.70
13	6.00	7.10	12.20	25	12.00	13.10	18.20	37	18.00	19.10	24.20	49	24.00	25.10	30.20
14	6.50	7.60	12.70	26	12.50	13.60	18.70	38	18.50	19.60	24.70	50	24.50	25.60	30.70
15	7.00	8.10	13.20	27	13.00	14.10	19.20	39	19.00	20.10	25.20				

Thickness: 0.30 ± 0.03
FPC Dimension Reference

Section:A-A

Specifications:

Current Rating: 0.5 A

Voltage Rating: 50V DC

Contact Resistance: 20m ohm Max

Insulation Resistance: 50M Ohm Min

Withstanding Voltage: 500V AC For One Minute

Operating Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Material:

Plastic: High Temp Plastic (Nylon 46 UL94V-0)

Plastic Color: White

Contacts: Phosphor Bronze


Plating: Tin Plated

How To Order

1226-XX-03

Top Contact Type

No Of Positions

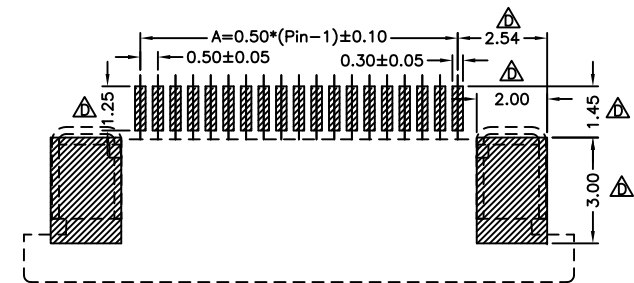

PCB Layout Reference

RoHS Compliant

DRAWN:

Sea

CHECKED:

Jeremry Liu

APPROVAL:

Mike Wu

GENERAL TOLERANCE:


 $.X = \pm 0.2$ $.XX = \pm 0.15$

UNIT: MM

SCALE: 20:1

SHEET: 1 / 1

PROJECTION:

**Neltron Industrial Co., Ltd.**DESCRIPTION: 0.5mm FPC Connector
Top Contact Type

PART NO:

1226-XX-03

SIZE

A4

F			
E	10-Apr-2008	ECN-CN080410	P.D.J
D	22-Jun-2007		Sea
REV	DATE	FILE	BY