

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Customers will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经明确授权, 否则禁止转让、复制、利用、交流本文件的内容, 侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.3

2


3

4


5

6

active

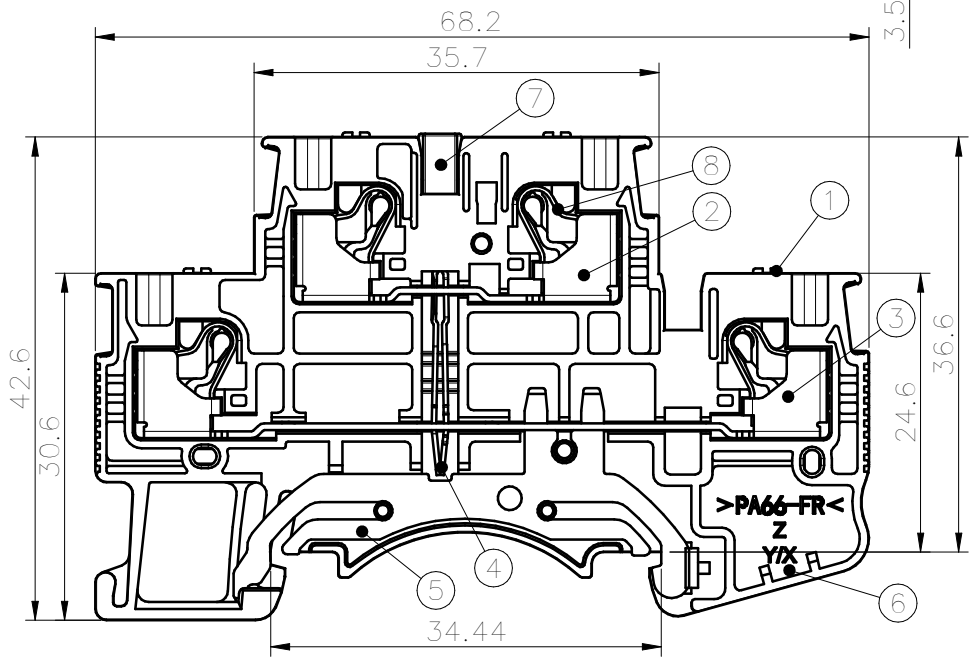


VIEW A

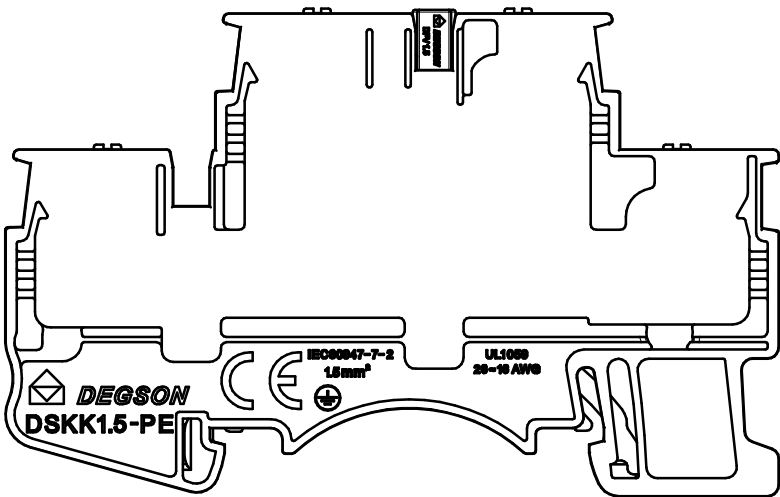

未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
3	6	10	18	30	50	80	120	180	250	315	400	500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

please refer to the 3D model,
for those unmarked dimensions

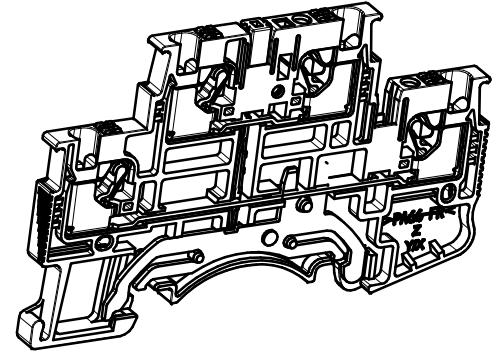

ITEM	NAME OF PART	MATERIAL	NOTES
8	Spring	Stainless steel	/
7	Housing_2	PA66	UL94V-0
6	Housing_1	PA66	UL94V-0
5	Grounding	Copper alloy	Sn Plated
4	Current_carrier	Copper	Sn Plated
3	Long_Current_carrier	Copper	Sn Plated
2	short_Current_carrier	Copper	Sn Plated
1	Button	PA66+GF%	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	26~16, 14SOL / 0.14~1.5conductor cross section flexible, with ferrule with plastic sleeve max.0.5mm² (stripping length: 8mm)		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	3.50/N=01P		
间距/Pitch(mm)/线数范围/Poles	8~10		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合 RoHS 环保要求/Conform to RoHS	/		
标准颜色编号/Standard color number: PANTONE / RAL			

DEGSON		MATERIAL:	SURFACE:
APPD: 李根芳		MAT NO./REV: 11040000195-1 / 00	
CHKD: 马恩开		NAME	
DRFT: 马恩开		DSKK1.5-PE-01P-1C-00A(H)	
REV		DRAWING NO.	TYPE
ECN		000008732	CUSTOMER DRAWING
DESCRIPTION		DRAWING STATUS	SCALE
DRFT		已发布	1.5:1
DATE		SHEET	1/1

1

2

3

4

5

6