

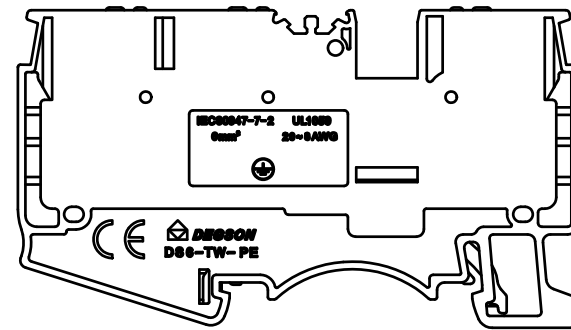
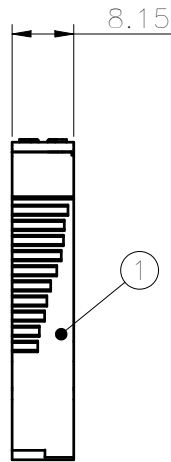
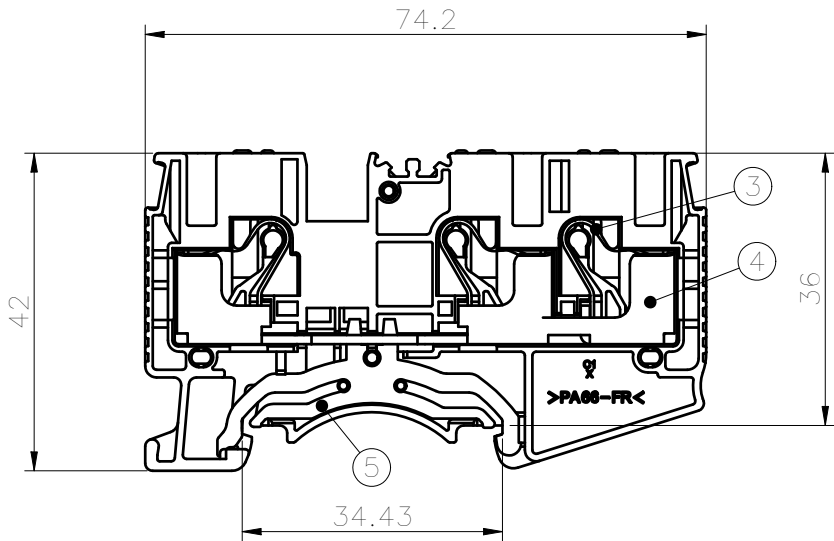


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violators will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经许可擅自复制或传播, 否则将承担法律责任。 未经许可擅自复制或传播, 否则将承担法律责任。

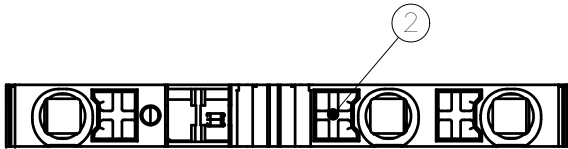

Please refer to the 3D model,
for those unmarked dimensions



未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL 标准/UL Standard:										B	C	D	
额定电压/电流/Rated Voltage(V)/Current(A)										/	/	/	
IEC 标准/IEC Standard:													
过压类别/Overvoltage Category/污染等级/Pollution Degree										III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)										/	/	/	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)										8	/	/	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)										20~8 / 0.5~6(10Sol)			
剥线长度/Stripping length(mm)										10~12			
使用温度范围/Operating temperature(°C)										-40~+105			
符合 RoHS 环保要求/Conform to RoHS										Yes			
标准颜色编号/Standard color number: PANTONE / RAL										/			

5	Grounding	Copper alloy	Sn plated
4	Current carrier	Copper	Sn plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL:		SURFACE:		
			MAT NO./REV: 11040000147-1 / 01		MAT STATUS: 批量,新物料		
APPD: 李根芳	2021.07.20		NAME				
CHKD: 毛军	2021.07.20		DS6-TW-PE-01P-1C-00A(H)				
DRFT: 毛军	2021.07.20		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4			200003413	CUSTOMER DRAWING	已发布	1:1	1/1

00	ECN		毛军	2021.07.20
REV	ECN	DESCRIPTION	DRFT	DATE