
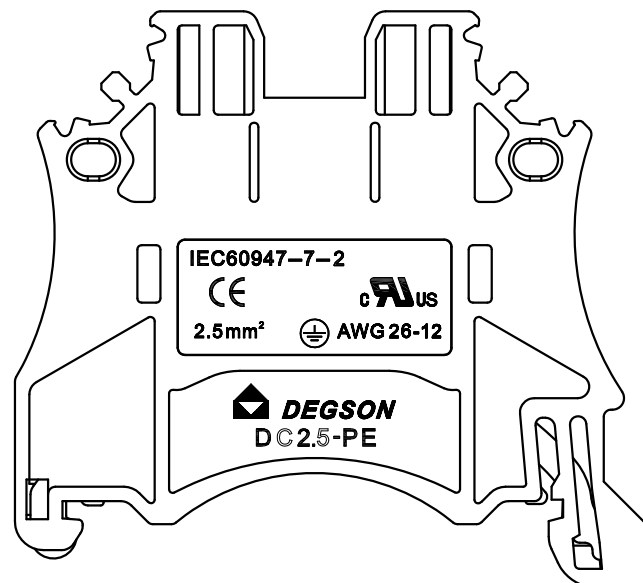


| 未注公差/General tolerances(mm) |              |               |                |                |                |                |                 |                  |                  |                  |                  |                  |       | 0.1/10<br>±2' |
|-----------------------------|--------------|---------------|----------------|----------------|----------------|----------------|-----------------|------------------|------------------|------------------|------------------|------------------|-------|---------------|
| 0<br>~<br>3                 | >3<br>~<br>6 | >6<br>~<br>10 | >10<br>~<br>18 | >18<br>~<br>30 | >30<br>~<br>50 | >50<br>~<br>80 | >80<br>~<br>120 | >120<br>~<br>180 | >180<br>~<br>250 | >250<br>~<br>315 | >315<br>~<br>400 | >400<br>~<br>500 | >500  |               |
| ±0.12                       | ±0.18        | ±0.22         | ±0.26          | ±0.31          | ±0.37          | ±0.57          | ±0.80           | ±0.93            | ±1.05            | ±1.15            | ±1.60            | ±2.20            | ±2.50 |               |

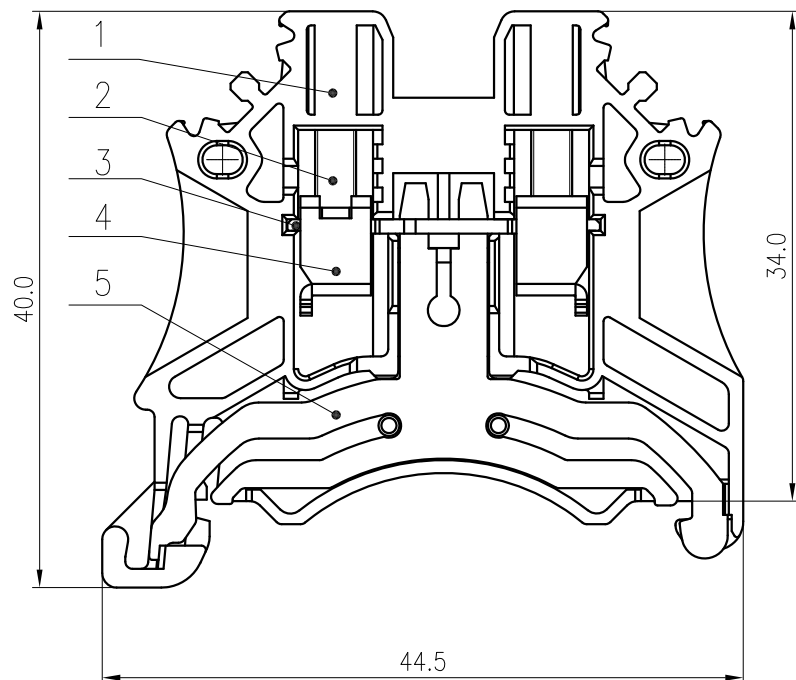


active

| IEC 标准/IEC Standard:                                             |                |
|------------------------------------------------------------------|----------------|
| 螺丝扭矩/Torque Tightening(N·m/Lb.in)                                | M2.5, 0.4/3.54 |
| 线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG) | 0.2~2.5/26~12  |
| 间距/Pitch(mm)                                                     | 5.10           |
| 剥线长度/Stripping length(mm)                                        | 8~9            |
| 使用温度范围/Operating temperature(°C)                                 | -40~+105       |
| 符合RoHS环保要求/Conform to RoHS                                       | Yes            |

| 5    | Grounding       | Copper alloy | Sn Plated |
|------|-----------------|--------------|-----------|
| 4    | Cage            | Steel        | Zn Plated |
| 3    | Current Carrier | Copper       | Sn Plated |
| 2    | Screw           | Steel        | Zn Plated |
| 1    | Housing         | PA66         | UL94 V-0  |
| ITEM | NAME OF PART    | MATERIAL     | NOTES     |

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|

|                                                                                                  |          |                                                                                                                                                                                       |                        |
|--------------------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| MATERIAL: /                                                                                      |          | SURFACE: /                                                                                                                                                                            |                        |
| MAT NO.: /                                                                                       |          | <div><b>DEGSON</b><sup>®</sup></div> <div>宁波高松电子有限公司<br/>NINGBO DEGSON ELECTRICAL CO., LTD</div> |                        |
| STATUS: /                                                                                        |          |                                                                                                                                                                                       |                        |
| APPD: Li GL 2020.05.27                                                                           |          | NAME:                                                                                                                                                                                 |                        |
| CHKD: Mao J 2020.05.27                                                                           |          | DC2.5-PE-01P-1Y-00A(H)                                                                                                                                                                |                        |
| DRFT: XMY 2016.01.29                                                                             |          | DRAWING NO.: DC2.5-PE-C01                                                                                                                                                             |                        |
|                                                                                                  |          | REV                                                                                                                                                                                   | T0-2                   |
| <div></div> | SIZE: A4 | <div></div>                                                                                      | TYPE: CUSTOMER DRAWING |
|                                                                                                  |          | SCALE: 2:1                                                                                                                                                                            | SHEET 1/1              |