



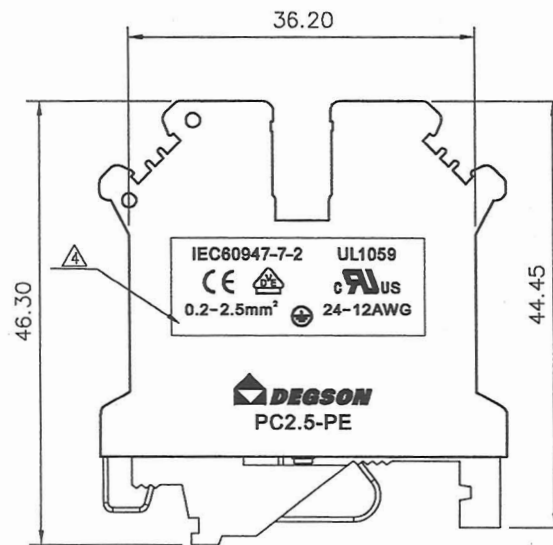


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



Yellow Green

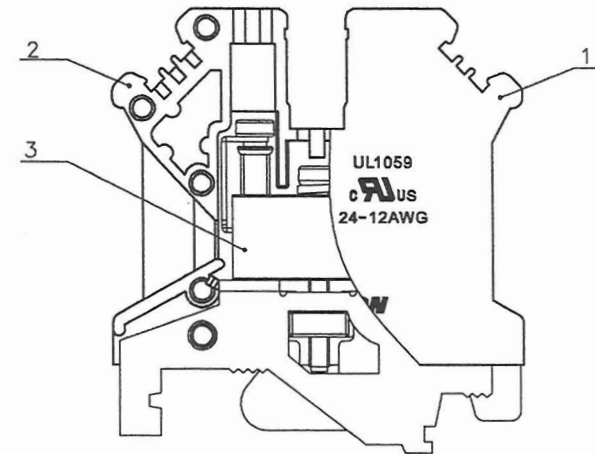

NOTES1:

UL Standard

- 1.Torque value : M3 , 4.43Lb.in
- 2.Wire range : 24~12AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV

- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.20mm, Poles : N=01P
- 3.Stripping length : 9~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

齐复专用
2016.10.21

(仅限内部使用, 对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
3	PC2.5-PE-Ground contact		
2	PC2.5-PE-Housing	PA66	UL94V-0
1	PC2.5-PE-Housing	PA66	UL94V-0

PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: Alan 10/18/16"		NAME: PC2.5-PE-01P-1Y-00A(H)	
CHKD: ZYK 10/18/16"		TITLE: CUSTOMER DRAWING	
DRFT: LM 11/16/05"		REV TO	
DRAWING NO.: PC2.5-PE-C01		SHEET 1/1	
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	
MM (INCH)		SCALE 1:1	