
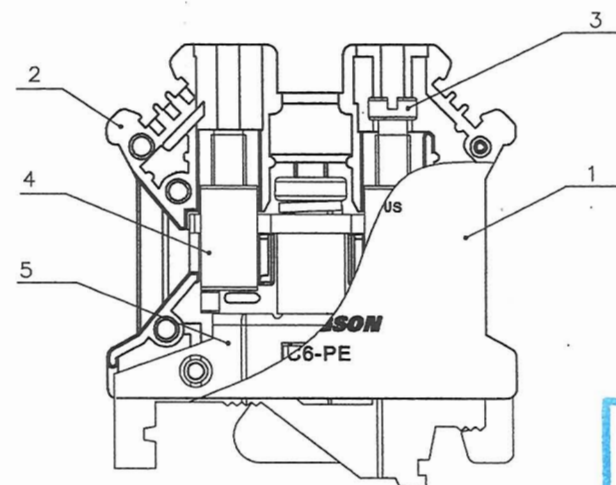
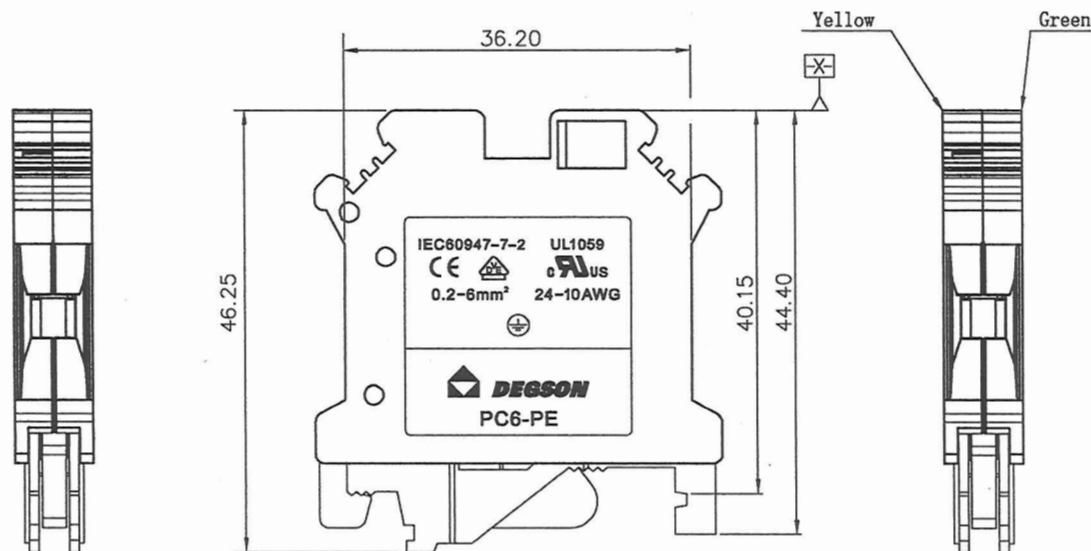


active

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

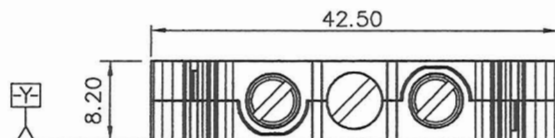

NOTES1:

UL Standard

- 1.Torque value : M4 , 10.53Lb.in
- 2.Wire range : 24~10AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
- 2.Torque value : M4 , 1.2N·m
- 3.Wire range : 0.2~6mm²

NOTES2:


- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 8.20mm, Poles : N=01P
- 3.Stripping length : 8~9mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							
TO	Over	TO	Over	TO	Over	TO	Over	TO	
6	10	10	24	30	60	100	150		0.1/10
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2		

6.RoHS Compliance

ITEM	NAME OF PART	MATERIAL	NOTES
5	PC6-PE-Ground contact		
4	PC6-Cage	Brass	M4/Ni Plated
3	PC6-Screw	Brass	M4/Ni Plated
2	PC6-PE-Housing	PA66	UL94V-0
1	PC6-PE-Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PC6-PE-01P-1Y-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT:	DRAWING NO.: PC6-PE-C01		REV TO
		DO NOT SCALE DRAWING		SHEET 1/1



THIRD ANGLE PROJECTION

齐发中心
2016.10.21
(仅限内部使用,对外无效)