





active

REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
①		Drawing Revise	Haoyh	06/27/06	
②		增加VDE、CE标志	LJH	11/12/07	
③		修改焊脚厚度尺寸	LJH	05/17/08	

Notes:

1. Pitch: 3.5mm, Poles: 2-24P
2. Rated voltage/current: UL 150V/10A
VDE 130V/10A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 26~16AWG, 1.0mm²
7. Max. Torque Value: M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10	10 to 24	30	30 to 60	60	60 to 100	100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

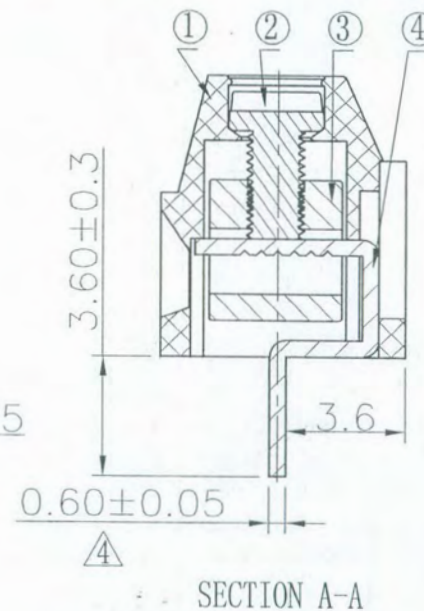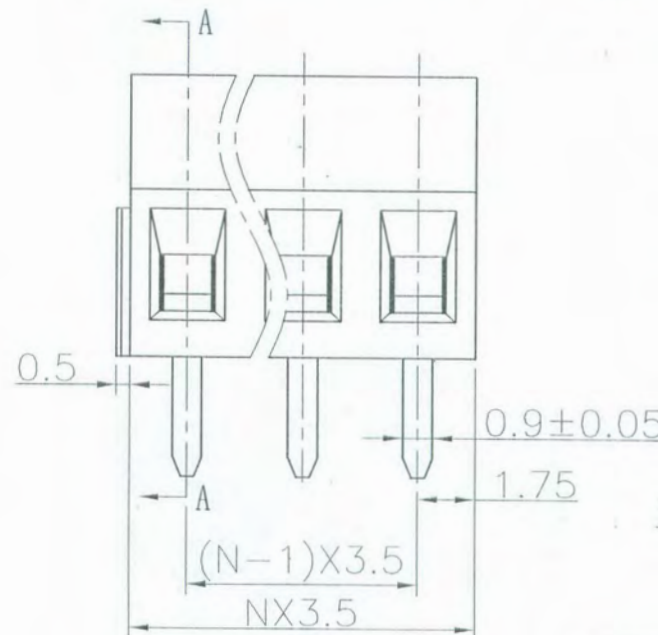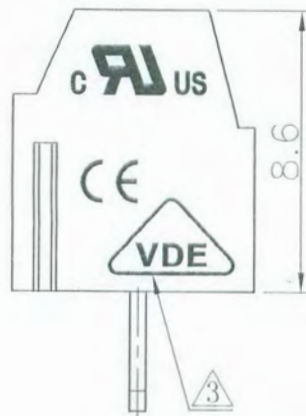

4	DG381 Pin header	4047B00010(H)	XX	Phosphor bronze	SnCe
3	DG381 Cage	X000000300(H)	XX	Brass	Ni plated
2	DG381 Screws	S000001440(H)	XX	Steel	Cr ³⁺ Zn

1	DG381-3.5-Housing	4032A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DFTD Haoyh DATE 05/16/08	CHKD Haoyh DATE 05/17/08	MFO Haoyh DATE 05/17/08	APPA Haoyh DATE 05/17/08
TOLERANCES EXCEPT AS NOTED					
MM	±	±	±	±	±
.00 ±	±	±	±	±	±
.000 ±	±	±	±	±	±
ANGLES ± 1°	G.E.	NAME: DG381-3.5-XXP-1Y-00A(H)			
THIRD ANGLE PROJECTION	FINISH:	DRAWING NO. DG381-3.5-E02			
	SCALE:	/PART NO.			
DO NOT SCALE DRAWING				SHEET 1 OF 1	