

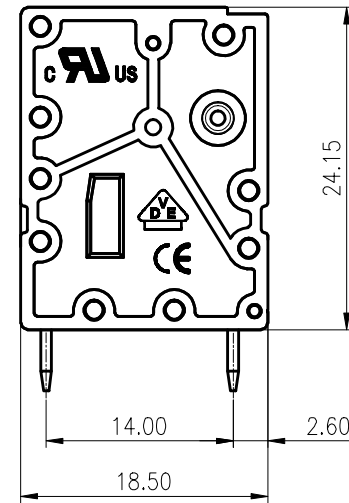
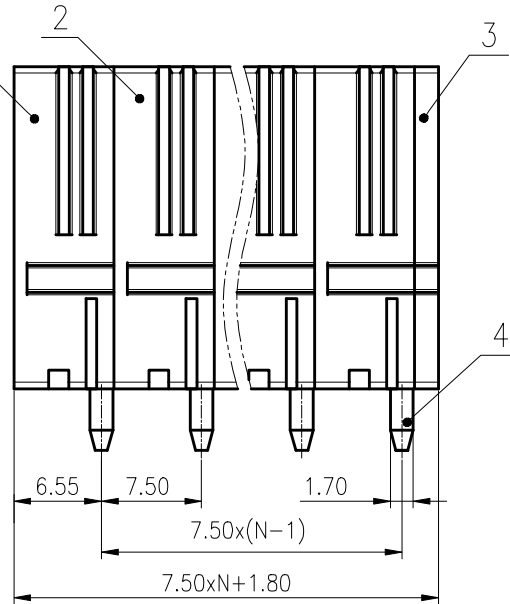


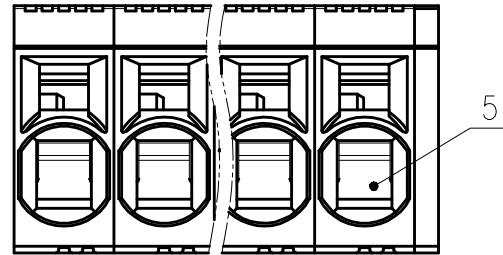


公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

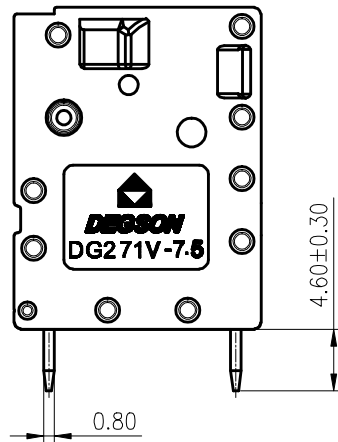

PCB LAYOUT

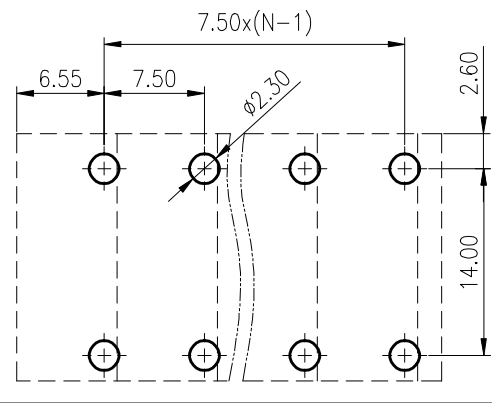

5	Spring	Stainless steel	/
4	Pin header	Copper	Sn Plated
3	Cover	PA66	UL94V-0
2	Center housing	PA66	UL94V-0
1	End housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/40	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		630/41	1000/41
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		6	6
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~6/24~8	
间距/Pitch(mm)/线数范围/Poles		7.5/N=01~16P	
剥线长度/Stripping length(mm)		14~15	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: / /		SURFACE: /				
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD				
STATUS: /						
APPD: Li GL 2020.05.15		NAME: DG271V-7.5-XXP-1Y-100A(H)				
CHKD: MaEK 2020.05.15						
DRFT: BYH 2018.10.08						
DRAWING NO.: DG271V-7.5-C08		REV	T1			
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET	1/1