

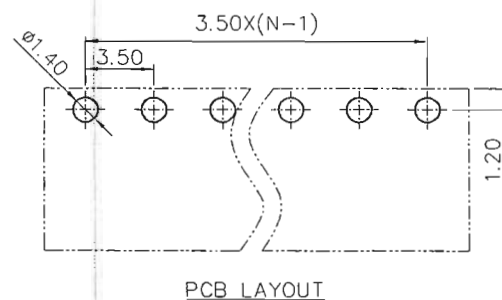
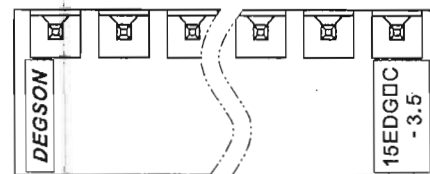
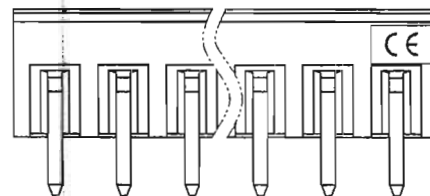
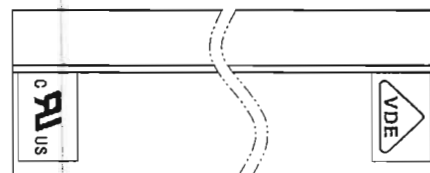



active

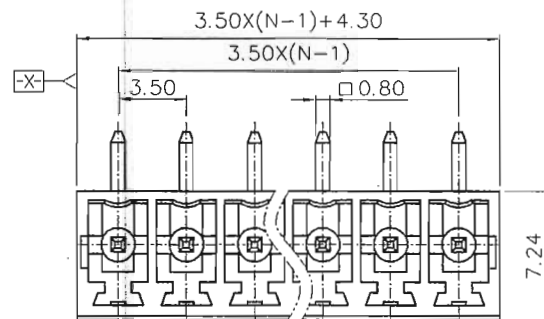

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 8A

2. Withstanding Voltage : AC1600V/1Min.

VDE Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009

2. Pitch : 3.50mm, Poles : N=2~24P

3. Operating temperature: -40°C~+105°C

4. Undimensioned Tolerances:

Pitch Range in mm		Nominal Dimension Range in mm		- / ^ / □
To	Over	To	Over	
6	10	30	60	0.1/10
10	24	60	100	<
24	30	100	150	
±0.15	±0.20	±0.30	±0.50	±2°

5. RoHS Compliance



2	PIN	COPPER ALLOY	Sn Plated
1	HOUSING	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: Aaron 10/14/15	NAME: 15EDGRC-3.5-XXP-1Y-00A(H)	
	CHKD: X/m 10/12/15	TITLE: CUSTOMER DRAWING	
	DRFT: Yz 10/12/15	REV TO	
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGRC-3.5-C02	SHEET 1/1
		DO NOT SCALE DRAWING	SCALE 1:1