

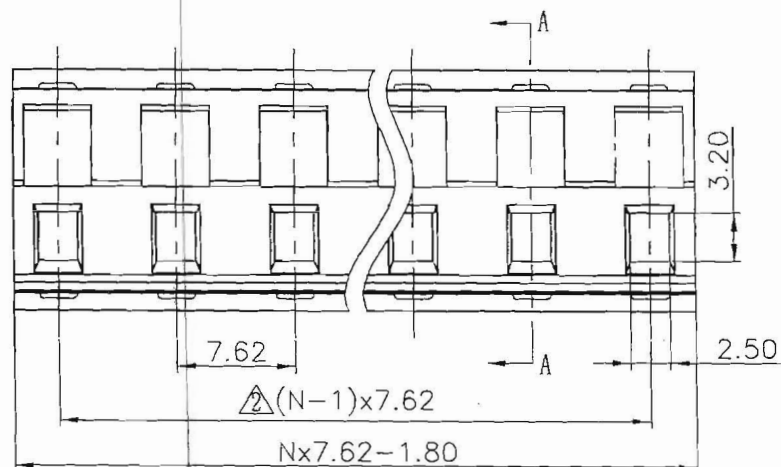



VIEW-B



5	2EDG Clamp	1005B00010(H)	XX	Phosphor bronze	Sn plated
4	DG128 Brass cage	X000000020(H)	XX	Brass	Ni plated
3	2EDG"- Screws-M2.5	S000001370(H)	XX	Steel	Cr ³⁺ Zn
2	2EDGK-7.62-Cover	1006C0YXXA(H)	1	PA66	UL94V-0

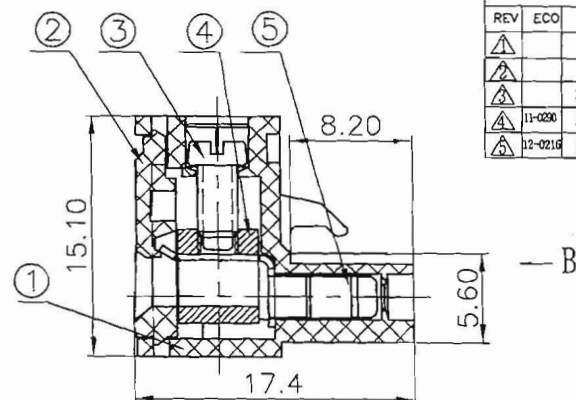

SECTION A-A

Notes:

- Pitch: 7.62mm Poles: 2-13P ④
- Rated voltage/current: UL 300V/15A
VDE 400V/20A
- Insulation resistance: 5000MΩ/1000V
- Withstanding voltage: AC2500V/1Min
- Wire range: 28~12AWG 2.5mm²
- Temp. Range: -40℃~+105℃
- Torque: 4.08kgf.cm (3.6lb.in)
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
①		Drawing amend	WF	12/31/05
②		修改图面	CSX	05/04/07
③		增加VDE、CE认证标志	LJH	01/14/08
④	11-0200	最长线数由12P改为13P	Golden	12/15/11
⑤	12-0216	夹子电镀由镀锌改为镀锡	XLM	01/07/13



I	2EDGK-7.62-Housing	1006A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTO DJJ CHKD INFO APPL DATE 09/26/05 DATE 01/10/13 DATE 01/14/13 MATERIAL: G.E.: FINISH: SCALE: 1:1 NAME 2EDGK-7.62-XXP-1Y-00A(H) DRAWING NO. 2EDGK-7.62-E05 /PART NO. DO NOT SCALE DRAWING					
SHEET 1				OF 1	