

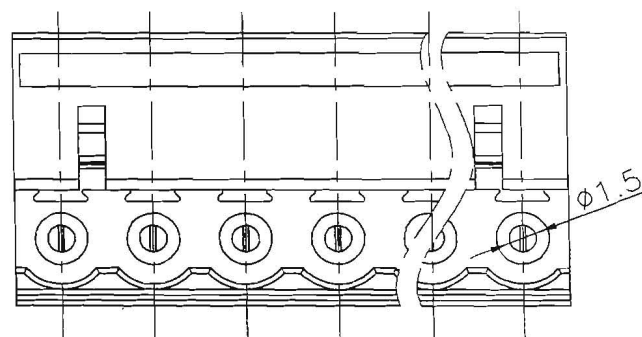


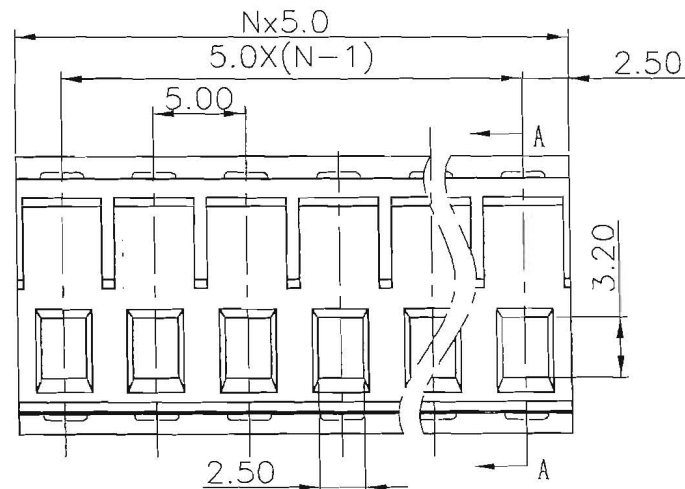


VIEW-B

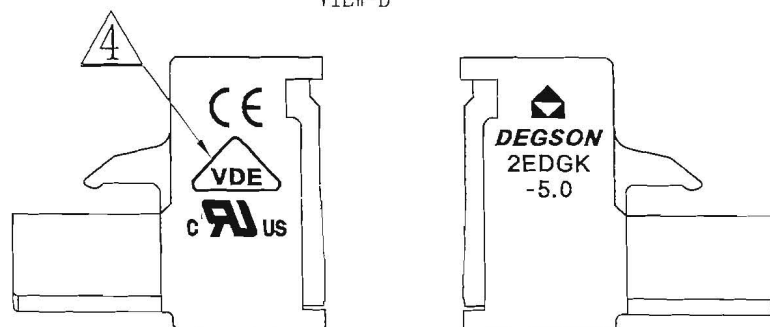

5	2EDG "—"Screws-M2.5	S000001370(H)	XX	Steel	Cr ³⁺ Zn
4	DG128-Brass cage	X000000020(H)	XX	Brass	Ni plated
3	2EDG-Clamp	1005B00010(H)	XX	Phosphor bronze	Sn plated
2	2EDGK-5.0-Cover	1016C0YXXA(H)	1	PA66	UL94V-0

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	VWF	01/05/06
△		修改UL刻字	CSX	06/18/07
△		增加VDE、CE认证标志	LJH	01/14/08
△	12-0216	端子电镀由镀锌改为镀锡	XTM	01/07/13

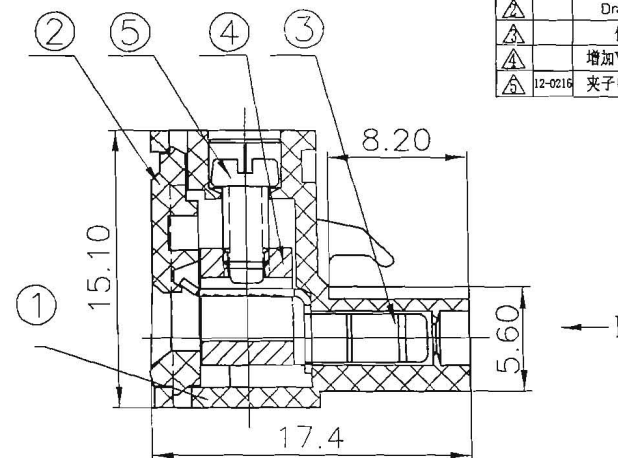

SECTION A-A

Notes:

- Pitch: 5.0mm Poles:2-24p
- Rated voltage/current:UL 300V/15A
VDE 320V/20A
- Insulation resistance: 5000MΩ/1000V
- Withstanding voltage: AC2500V/1Min
- Wire range: 28-12AWG 2.5mm²
- Temp. Range: -40° C~+105° C
- Torque: 4.08kgf.cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0/0.05/0

1	2EDGK-5.0-Housing	1016A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .00 ± .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTD Hooyh DATE 04/18/05 CHKD DATE 01/10/13 MFO DATE 01/14/13 APPL DATE MATERIAL: G.E: FINISH: SCALE: 1:1 DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: 2EDGK-5.0-XXP-1Y-00A(H) DRAWING NO. 2EDGK-5.0-E10 /PART NO. DO NOT SCALE DRAWING					
SHEET 1 OF 1				REV T5 01/07/13	A

