

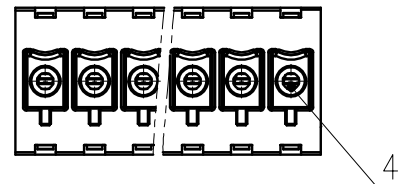
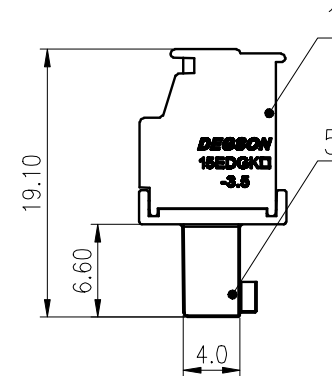
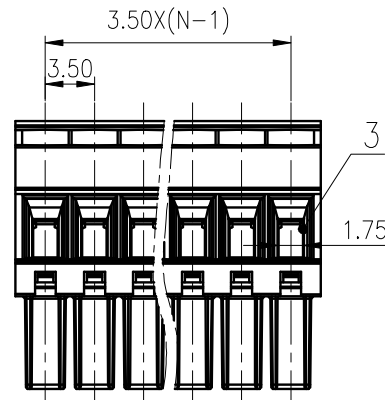




未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

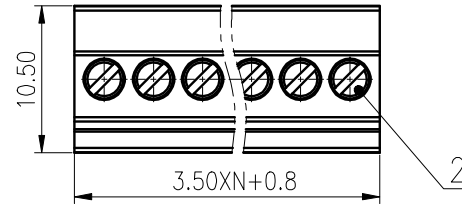

5	Cover	PA66	UL94V-0
4	Clamp	Copper Alloy	Sn Plated
3	Cage	Copper Alloy	M2/Ni Plated
2	Screw	Steel	M2/Zn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard: B C D

额定电压/电压/Rated Voltage(V)/Current(A) 300/8 / 300/8

IEC 标准/IEC Standard: B C D

过压类别/Overvoltage Category/污染等级/Pollution Degree II/2

额定电压/电压/Rated Voltage(V)/Current(A) 250/7

额定脉冲电压(kV)/Rate Impulse Voltage(kV) 2.5

螺丝扭矩/Torque Tightening(N·m/Lb.in) M2, 0.2/1.77

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 0.5~1.5/28~16

间距/Pitch(mm)/线数范围/Poles 3.5/N=02~24P

剥线长度/Stripping length(mm) 6~7

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: Lan ChH 2020.05.27 NAME: 宁波高松电子有限公司

CHKD: Yu JZh 2020.05.27 DEGSN[®] NINGBO DEGSN ELECTRICAL CO., LTD

DRFT: CenK 2020.05.27 15EDGKB-3.5-XXP-1Y-100A(H)

DRAWING NO.: 10002159 REV TO

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
-----	-----	-------------	------	------	----------	--------------	------------------------	------------	-----------