
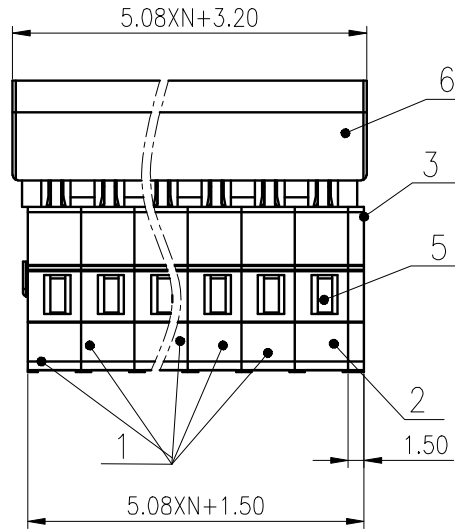
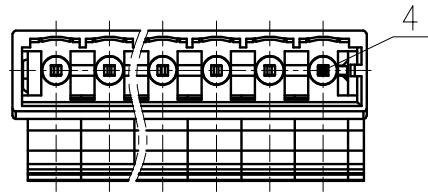



PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM				—
TO	OVER	TO	OVER	TO	OVER	
6	6 TO 10	10 TO 24	30 TO 60	60 TO 100	100 TO 150	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70



6	Housing2	PA66	UL94V-0	
5	Spring	Stainless Steel		
4	Pin		Copper	Sn Plated
3	Cover	PA66	UL94V-0	
2	Side Housing	PA66	UL94V-0	
1	Housing1	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/15	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		Ⅲ/3	Ⅲ/2	Ⅱ/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	320/20	/
额定脉冲电压 (kV)/Rate Impulse Voltage(kV)		/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.2~2.5/22~14		
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~24P		
剥线长度/Stripping length(mm)		10		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number:		PANTONE 7534U		
PANTONE				

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: /			
CHKD: /	NAME: 8EDGKR-5.08-XXP-11-01A(H)		
DRFT: CGM 2018.01.12	DRAWING NO.: 8EDGKR-5.08-C02		REV TO
④	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 3:2
mm (inch)		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE