

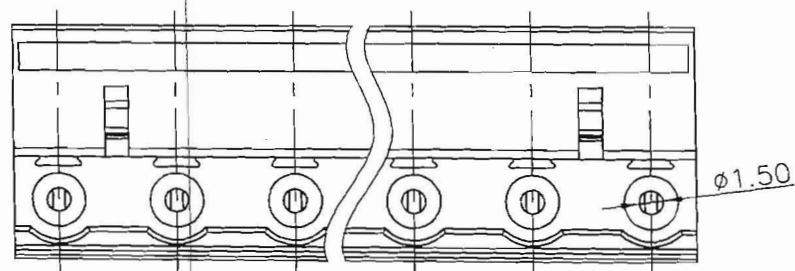
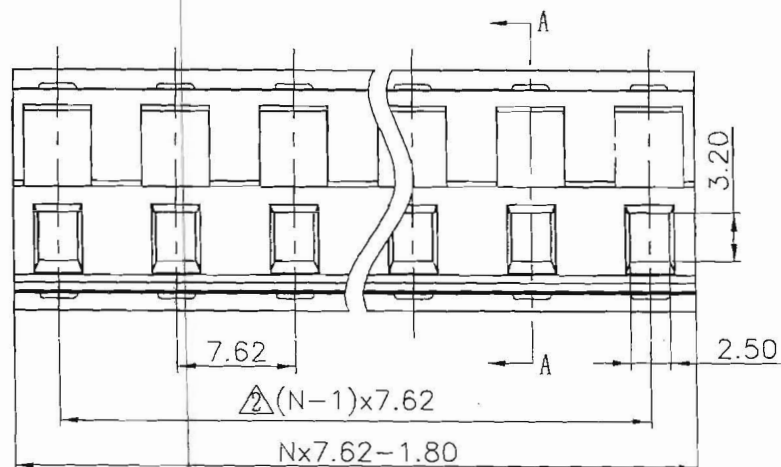



active



VIEW-B



5	2EDG Clamp	1005B00010(H)	XX	Phosphor bronze	Sn plated
4	DG128 Brass cage	X000000020(H)	XX	Brass	Ni plated
3	2EDG"- Screws-M2.5	S000001370(H)	XX	Steel	Cr ³⁺ Zn
2	2EDGK-7.62-Cover	1006C0YXXA(H)	1	PA66	UL94V-0

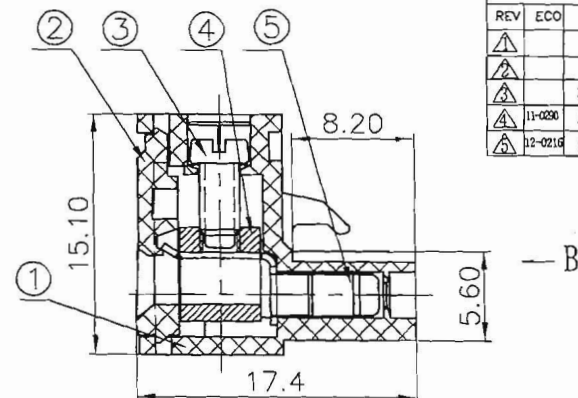

SECTION A-A

Notes:

- Pitch: 7.62mm Poles:2-13P Δ
- Rated voltage/current:UL 300V/15A
VDE 400V/20A
- Insulation resistance: 5000M Ω /1000V
- Withstanding voltage: AC2500V/1Min
- Wire range: 28~12AWG 2.5mm²
- Temp. Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
- Torque: 4.08kgf.cm(3.6lb.in)
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	
± 0.10	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0

REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing amend	WF	12/31/05
2		修改图面	CSX	05/04/07
3		增加VDE、CE认证标志	LJH	01/14/08
4	11-0200	最长线数由12P改为13P	Golden	12/15/11
5	12-0216	夹子电镀由镀锌改为镀锡	XLM	01/07/13



I	2EDGK-7.62-Housing	1006A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .00 ± .000 ± INCH ± .000 ± DFTO DJJ CHKD MFO APPL DATE 09/26/05 DATE 01/10/13 DATE 01/14/13 MATERIAL: G.E.: FINISH: SCALE: 1:1 THIRD ANGLE PROJECTION NAME 2EDGK-7.62-XXP-1Y-00A(H) DRAWING NO. 2EDGK-7.62-E05 /PART NO. SIZE A3 REV T5 01/07/13					
DEGSN 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					