
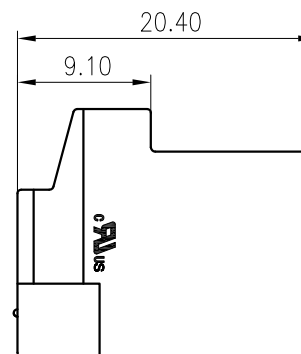

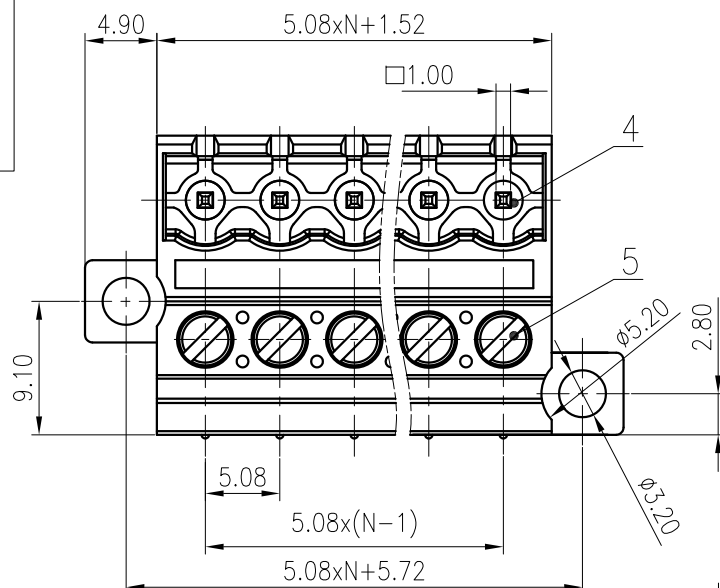


Drill Hole Layer

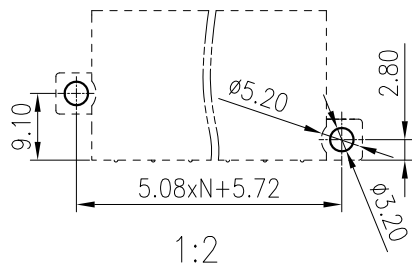

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	2.50	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

5	Screw	Steel	M3/Zn Plated
4	Pin	Copper	Sn Plated
3	Cage	Copper Alloy	Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		250/12	320/12
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4	4
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.59/5.21	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~2.5/28~12	
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~24P	
剥线长度/Stripping length(mm)		7~8	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NAME:	宁波高松电子有限公司
STATUS:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
APPD: LanChH 2020.05.19		2EDG-DB-5.08-XXP-14-00A(H)	
CHKD: GonYZh 2020.05.19		DRAWING NO.:	10001971
DRFT: ChenZhM 2020.05.19		REV	T0
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2:1
		SHEET	1/1

active

REV	ECN	DESCRIPTION	DRFT	DATE