

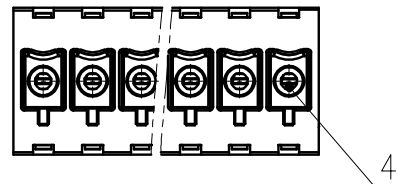
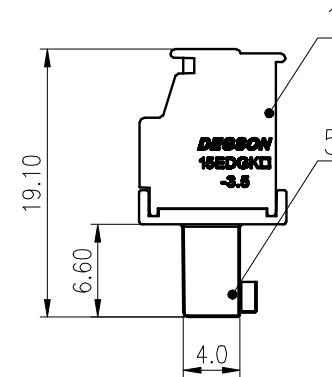


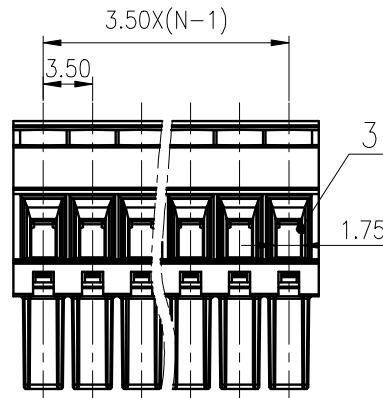

未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

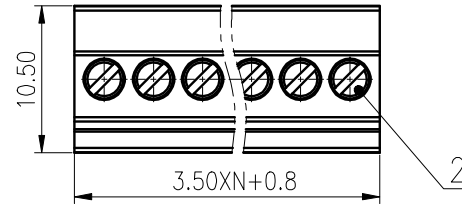

5	Cover	PA66	UL94V-0
4	Clamp	Copper Alloy	Sn Plated
3	Cage	Copper Alloy	M2/Ni Plated
2	Screw	Steel	M2/Zn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard:	B	C	D
--------------------	---	---	---

额定电压/电压/Rated Voltage(V)/Current(A)	300/8	/	300/8
-------------------------------------	-------	---	-------

IEC 标准/IEC Standard:			
----------------------	--	--	--

过压类别/Overvoltage Category/污染等级/Pollution Degree		II/2	
---	--	------	--

额定电压/电压/Rated Voltage(V)/Current(A)		250/7	
-------------------------------------	--	-------	--

额定脉冲电压(kV)/Rate Impulse Voltage(kV)		2.5	
-------------------------------------	--	-----	--

螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77	
-----------------------------------	--	--------------	--

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~1.5/28~16	
--	--	---------------	--

间距/Pitch(mm)/线数范围/Poles		3.5/N=02~24P	
-------------------------	--	--------------	--

剥线长度/Stripping length(mm)		6~7	
---------------------------	--	-----	--

使用温度范围/Operating temperature(°C)		-40~+105	
----------------------------------	--	----------	--

符合RoHS环保要求/Conform to RoHS		Yes	
----------------------------	--	-----	--

MATERIAL:	SURFACE:		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Lan ChH 2020.05.27			
CHKD: Yu JZh 2020.05.27	NAME: 15EDGKB-3.5-XXP-1Y-100A(H)		
DRFT: CenK 2020.05.27	DRAWING NO.: 10002159		
REV	ECN	DESCRIPTION	DRFT
DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1
			SHEET 1/1