

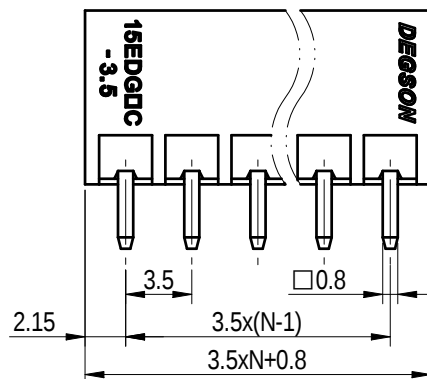

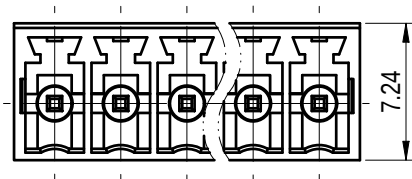
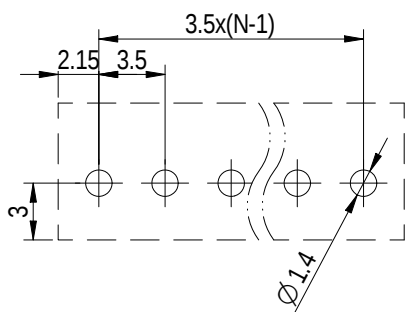
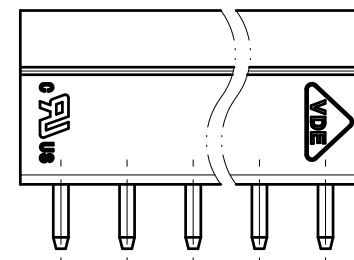


PCB LAYOUT



未注公差/General tolerances (mm)														0.1/10 ±2°
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

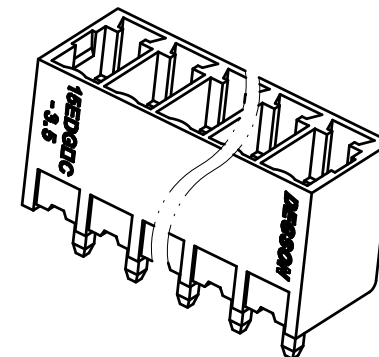

Note:

The A&Z(H) in the name means: A(H) and Z(H).

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	300/8
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/	2.5
间距/Pitch(mm)/线数范围/Poles		3.5/N=02~24P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

APPD: 兰春华 2022.08.09
CHKD: 龚耀志 2022.08.09DRFT: 朱岳鹏 2022.08.09
A4 (inch)MATERIAL: SURFACE/COLOR:
MAT NO./REV: - / 00 MAT STATUS: 批量NAME
15EDGVC-3.5-XXP-1Y-00A&Z(H)

DRAWING NO. 200102271 TYPE CUSTOMER DRAWING DRAWING STATUS 已发布 SCALE 2.5:1 SHEET 1/1

00	REV	ECN	DESCRIPTION	朱岳鹏	2022.08.09
00	REV	ECN	DESCRIPTION	DRFT	DATE